


پیوست شماره 1: شرح مشخصات فنی کالا (دیتاشیت)


NPC-RT ON/OFF VALVE Datasheets

Table 1.		
Items	Tag ID.	Quantity
1	SDV 4201	1
2	SDV 4202	1
3	SDV 4203	1
4	SDV 3501	1
5	SDV 3502	1
6	SDV 6101	1
7	SDV 6102	1
8	SDV 6201	1
9	SDV 6202	1
Numbers		9


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	SDV 4201			
	Service	HP 421 VENT			
	Location	HP 421			
	P&I n.	312002_042			
	Fluid	MONOMERS			
	State	GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	24	
		Max Pressure	Barg	30	
		Normal Temp.	°C	70	
		Max. Temp.	°C	-45 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	3/2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographte)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder		
	Actuator size	VTA		
	Actuator ANGLE (torque)	0° - 90°		
	Acting = Spring Return or Double Acting Type	Spring Return (SINGLE ACTION)		
	Air supply press.	Barg	6	
	On Air Failure	OPEN		
	Hand wheel + Declutched or Side type	NO		
	Body material	VTA (lightweight or Aluminium Body)		
	Valve position monitor	YES		
	Air filter regulator + Supply & output pressure gauge	YES		
	MANUFACTURER	VTA		
	MODEL no.	VTA		
	Ordering code information	VTA		
	accessary	Marking(Tagging)		
Solenoid	Solenoid Valve Type	NA		
	Power Supply V DC	NA		
	ENCLOSURE PROTECTION	NA		
	Mounting Position (Remote version or compact)	NA		
	single actuated with spring return mechanism	NA		
	double actuated with two locking positions	NA		
	On Power Failure	NA		
	Threaded connection Size	NA		
	Degree of protection	NA		
	Output current (mA)	NA		
	Electrical connection	NA		
	MANUFACTURER	NA		
	Ordering code information	NA		
	accessary	NA		
Limit Switch Or Proximity Sensor	Type	Quantity	NA	NA
	Power Supply V DC	NA		
	ENCLOSURE PROTECTION	NA		
	Degree of protection	NA		
	Electrical connection	NA		
	MANUFACTURER	NA		
	Ordering code information	NA		
	accessary	NA		
Excess flow valve	Type	SEAT DISC		
	Fluid	suitable for instrument air		
	State	GAS		
	Pressure	6 barg		
	Temperature	ambient		
	Flowrate	the lowest amount		
	materials	SS304		
	Input & Output Size	1/4 MALE NPT		
MANUFACTURER	VTA			
Ordering code information	VTA			

Excess flow valve : stop uncontrolled release of system media if downstream line ruptures.



Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	SDV 4202			
	Service	HP 422 VENT			
	Location	HP 422			
	P&I n.	312002_042			
	Fluid	MONOMERS			
	State	GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	24	
		Max Pressure	Barg	30	
		Normal Temp.	°C	70	
		Max. Temp.	°C	-45 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	½"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
SEAL	VTA (PTFE OR Carbographe)				
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No:

Doc. No:

Owner Job No:

Sheet No. :

of

Pneumatic Piston+Cylinder Actuator	Type of Actuator		Pneumatic Piston+Cylinder	
	Actuator size		VTA	
	Actuator ANGLE (torque)		0° - 90°	
	Acting = Spring Return or Double Acting Type		Spring Return (SINGLE ACTION)	
	Air supply press.	Barg	6	
	On Air Failure		OPEN	
	Hand wheel + Declatched or Side type		NO	
	Body material		VTA (lightweight or Aluminium Body)	
	Valve position monitor		YES	
	Air filter regulator + Supply & output pressure gauge		YES	
	MANUFACTURER		VTA	
	MODEL no.		VTA	
	Ordering code information		VTA	
accessary		Marking(Tagging)		
Solenoid	Solenoid Valve Type		NA	
	Power Supply V DC		NA	
	ENCLOSURE PROTECTION		NA	
	Mounting Position (Remote version or compact)		NA	
	single actuated with spring return mechanism		NA	
	double actuated with two locking positions		NA	
	On Power Failure		NA	
	Threaded connection Size		NA	
	Degree of protection		NA	
	Output current (mA)		NA	
	Electrical connection		NA	
	MANUFACTURER		NA	
	Ordering code information		NA	
accessary		NA		
Limit Switch Or Proximity Sensor	Type	Quantity	NA	NA
	Power Supply V DC		NA	
	ENCLOSURE PROTECTION		NA	
	Degree of protection		NA	
	Electrical connection		NA	
	MANUFACTURER		NA	
	Ordering code information		NA	
	accessary		NA	
Excess flow valve	Type		SEAT DISC	
	Fluid		suitable for instrument air	
	State		GAS	
	Pressure		6 barg	
	Temperature		ambient	
	Flowrate		the lowest amount	
	materials		SS304	
	Input & Output Size		1/4 MALE NPT	
	MANUFACTURER		VTA	
	Ordering code information		VTA	

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of


Excess flow valve : stop uncontrolled release of system media if downstream line ruptures.

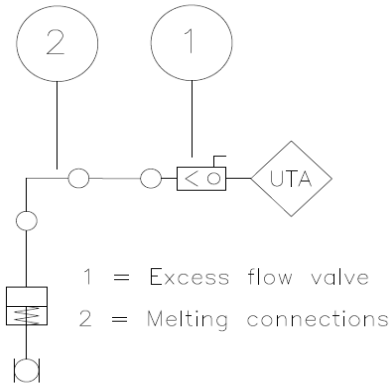


Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	SDV 4203			
	Sevice	HP 423 VENT			
	Location	HP 423			
	P&I n.	312002_042			
	Fluid	MONOMERS			
	State	GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	24	
		Max Pressure	Barg	30	
		Normal Temp.	°C	70	
		Max. Temp.	°C	-45 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1/2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
	MANUFACTURER	VTA			
	MODEL no.	VTA			
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				


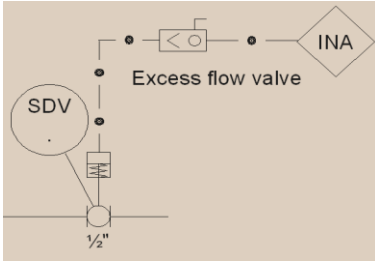
		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
		DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:		Doc. No:		
Owner Job No:		Sheet No. : of		
Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder		
	Actuator size	VTA		
	Actuator ANGLE (torque)	0° - 90°		
	Acting = Spring Return or Double Acting Type	Spring Return (SINGLE ACTION)		
	Air supply press.	Barg	6	
	On Air Failure	OPEN		
	Hand wheel + Declutched or Side type	NO		
	Body material	VTA (lightweight or Aluminium Body)		
	Valve position monitor	YES		
	Air filter regulator + Supply & output pressure gauge	YES		
	MANUFACTURER	VTA		
	MODEL no.	VTA		
	Ordering code information	VTA		
accessary	Marking(Tagging)			
Solenoid	Solenoid Valve Type	NA		
	Power Supply V DC	NA		
	ENCLOSURE PROTECTION	NA		
	Mounting Position (Remote version or copmact)	NA		
	single actuated with spring return mechanism	NA		
	double actuated with two locking positions	NA		
	On Power Failure	NA		
	Threaded connection Size	NA		
	Degree of protection	NA		
	Output current (mA)	NA		
	Electrical connection	NA		
	MANUFACTURER	NA		
	Ordering code information	NA		
accessary	NA			
Limit Switch Or Proximity Sensor	Type	Quantity	NA	NA
	Power Supply V DC	NA		
	ENCLOSURE PROTECTION	NA		
	Degree of protection	NA		
	Electrical connection	NA		
	MANUFACTURER	NA		
	Ordering code information	NA		
	accessary	NA		
Excess flow valve	Type	SEAT DISC		
	Fluid	suitable for instrument air		
	State	GAS		
	Pressure	6 barg		
	Temperature	ambient		
	Flowrate	the lowest amount		
	materials	SS304		
	Input & Output Size	1/4 MALE NPT		
MANUFACTURER	VTA			
Ordering code information	VTA			


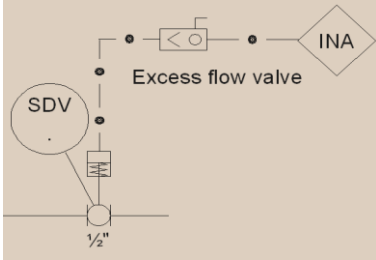
PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. : of	


Excess flow valve : stop uncontrolled release of system media if downstream line ruptures.

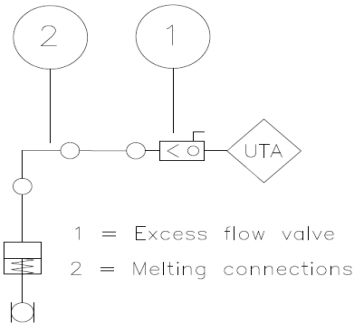


Date	Status	Prepared	Checked		Approved


		PROJECT: PP-PE PILOT PLANT				 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		Safety Device Valve (SAFETY DEPRESSURIZE VALVE)					
		Contractor Job No:		Doc. No: 900-DAS-A4-IN-0002			
		Owner Job No:		Sheet No: 106 of 116			
Valve (HV)	General Data	Item		SDV 3501			
		Service		FT 351 VENT			
		Location		FT 351			
		P&I n.		312002_035			
		Fluid		MONOMERS			
		State		GAS			
	Condition	Normal Pressure	Barg	18			
		Normal DP	Barg	18			
		Max Pressure	Barg	28			
		Normal Temp.	°C	70			
		Max. Temp.	°C	-45 +100			
	Flowrate	Normal	Kg/h				
		Minimum	Kg/h	0			
		Full Scale	Kg/h	0			
	Sp. Gr.	Gas vapurs	Kg/m3				
		Liquid	Kg/m3				
		Mol. Weight	Kg/Kmol				
		Viscosity	mPa's				
	Body	Type	BALL FULL BORE				
		Size	½" 1DS4				
		Rating	RF Flange-S.S-300#				
		Fire Safe Seat					
		Body material					
		Valve Seat					
		Valve Seat material					
	Actuator	Type	PNEUMATIC				
		Acition	SINGLE ACTION				
		Air supply press.	Barg	7			
On Air Failure		OPEN					
On Power Failure							
SEAT Leakage Class ANSI							
ACCESSORIES	Melting conection valve	YES					
	Pressure gauge and filter	YES					
	Manual Control Wheel	NA					
	Cable Gland	Size/Qty	NA				
	Electrical Conection	NA					
	Tubing & Conection	SS Tube 1/4"					
	Switch	Protection	Certificate	NA	EExia-IIC T4	YES	
							
1	0	12/27/2021	IFA	K.A	M.N	AA.SH	
No.	Rev	Date	Status	Prepared	Checked	Approved	


		PROJECT: PP-PE PILOT PLANT				 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		Safety Device Valve (SAFETY DEPRESSURIZE VALVE)					
		Contractor Job No:		Doc. No: 900-DAS-A4-IN-0002			
		Owner Job No:		Sheet No: 107 of 116			
Valve (HV)	General Data	Item		SDV 3502			
		Service		V 351 VENT			
		Location		V 351			
		P&I n.		312002_035			
		Fluid		PROPYLENE			
		State		GAS			
	Condition	Normal Pressure	Barg	25			
		Normal DP	Barg	25			
		Max Pressure	Barg	30			
		Normal Temp.	°C	80			
		Max. Temp.	°C	-45 +180			
	Flowrate	Normal	Kg/h				
		Minimum	Kg/h	0			
		Full Scale	Kg/h	0			
	Sp. Gr.	Gas vapurs	Kg/m3				
		Liquid	Kg/m3				
		Mol. Weight	Kg/Kmol				
		Viscosity	mPa's				
	Body	Type	BALL FULL BORE				
		Size	½" 1DS4				
		Rating	RF Flange-S.S-300#				
		Fire Safe Seat					
		Body material					
		Valve Seat					
		Valve Seat material					
	Actuator	Type	PNEUMATIC				
		Acition	SINGLE ACTION				
		Air supply press.	Barg	7			
On Air Failure		OPEN					
On Power Failure							
SEAT Leakage Class ANSI							
ACCESSORIES	Melting conection valve	YES					
	Pressure gauge and filter	YES					
	Manual Control Wheel	NA					
	Cable Gland	Size/Qty	NA				
	Electrical Conection	NA					
	Tubing & Conection	SS Tube 1/4"					
	Switch	Protection	Certificate	NA	EExia-IIC T4	YES	
							
1	0	12/27/2021	IFA	K.A	M.N	AA.SH	
No.	Rev	Date	Status	Prepared	Checked	Approved	

		PROJECT: PP-PE PILOT PLANT			 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی				
		Safety Device Valve (SAFETY DEPRESSURIZE VALVE)							
		Contractor Job No:		Doc. No: 900-DAS-A4-IN-0002					
		Owner Job No:		Sheet No: 113 of 116					
Valve (HV)	General Data	Item		SDV 6101					
		Sevice		V 611 VENT					
		Location		V 611					
		P&I n.		312002_061					
		Fluid		NITROGEN / MONOMERS					
		State		GAS					
	Condition	Normal Pressure	Barg	1.5					
		Normal DP	Barg	1.5					
		Max Pressure	Barg	8					
		Normal Temp.	°C	90					
		Max. Temp.	°C	-45 +230					
	Flowrate	Normal	Kg/h						
		Minimum	Kg/h	0					
		Full Scale	Kg/h	0					
	Sp. Gr.	Gas vapurs	Kg/m3						
		Liquid	Kg/m3						
		Mol. Weight	Kg/Kmol						
		Viscosity	mPa's						
	Body	Type	BALL FULL BORE						
		Size	½" 1CS1						
		Rating	RF Flange-S.S-150#						
		Fire Safe Seat							
		Body material							
		Valve Seat							
		Valve Seat material							
		Notes							
	Actuator	Type	PNEUMATIC						
		Acition	SINGLE ACTION						
Air supply press.		Barg	7						
On Air Failure		OPEN							
On Power Failure									
SEAT Leakage Class ANSI									
ACCESSORIES	Melting conection valve	YES							
	Pressure gauge and filter	YES							
	Manual Control Wheel	NA							
	Cable Gland	Size/Qty	NA						
	Electrical Conection	NA							
	Tubing & Conection	SS Tube 1/4"							
	Switch	Protection	Certificate	NA	EExia-IIC T4	YES			

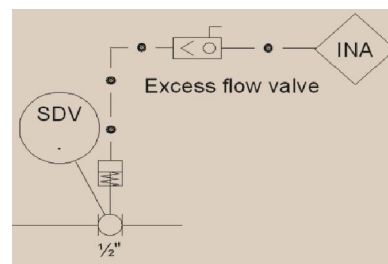


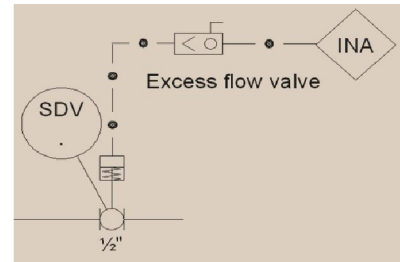
1	0	12/27/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

		PROJECT: PP-PE PILOT PLANT			 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		Safety Device Valve (SAFETY DEPRESSURIZE VALVE)				
		Contractor Job No:		Doc. No: 900-DAS-A4-IN-0002		
		Owner Job No:		Sheet No: 114 of 116		
Valve (HV)	General Data	Item		SDV 6102		
		Sevice		V 611 JACKET VENT		
		Location		V 611		
		P&I n.		312002_061		
		Fluid		STEAM		
		State		GAS		
	Condition	Normal Pressure	Barg	0.3		
		Normal DP	Barg	0.3		
		Max Pressure	Barg	6		
		Normal Temp.	°C	110		
		Max. Temp.	°C	-30 +230		
	Flowrate	Normal	Kg/h			
		Minimum	Kg/h	0		
		Full Scale	Kg/h	0		
	Sp. Gr.	Gas vapurs	Kg/m3			
		Liquid	Kg/m3			
		Mol. Weight	Kg/Kmol			
		Viscosity	mPa's			
	Body	Type	BALL FULL BORE			
		Size	½" 1CS1			
Rating		RF Flange-S.S-150#				
Fire Safe Seat						
Body material						
Valve Seat						
Valve Seat material						
Notes						
Actuator	Type	PNEUMATIC				
	Acition	SINGLE ACTION				
	Air supply press.	Barg	7			
	On Air Failure	OPEN				
	On Power Failure					
	SEAT Leakage Class ANSI					
ACCESSORIES	Melting conection valve	YES				
	Pressure gauge and filter	YES				
	Manual Control Wheel	NA				
	Cable Gland	Size/Qty	NA			
	Electrical Conection	NA				
	Tubing & Conection	SS Tube 1/4"				
	Switch	Protection	Certificate	NA	EExia-IIC T4	YES

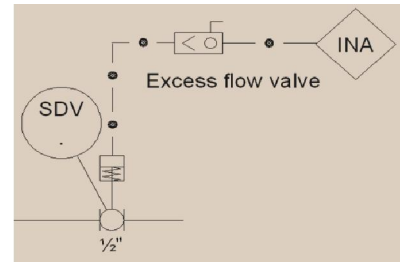

1	0	12/27/2021	IFA	K.A	M.N
No.	Rev	Date	Status	Prepared	Checked
					AA.SH
					Approved

		PROJECT: PP-PE PILOT PLANT			 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		Safety Device Valve (SAFETY DEPRESSURIZE VALVE)				
		Contractor Job No:		Doc. No: 900-DAS-A4-IN-0002		
		Owner Job No:		Sheet No: 115 of 116		
Valve (HV)	General Data	Item		SDV 6201		
		Sevice		DR 621 VENT		
		Location		DR 621		
		P&I n.		312002_062		
		Fluid		NITROGEN		
	State		GAS			
	Condition	Normal Pressure	Barg	0.2		
		Normal DP	Barg	0.2		
		Max Pressure	Barg	1		
		Normal Temp.	°C	90		
		Max. Temp.	°C	-30 + 180		
	Flowrate	Normal	Kg/h			
		Minimum	Kg/h	0		
		Full Scale	Kg/h	0		
	Sp. Gr.	Gas vapurs	Kg/m3			
		Liquid	Kg/m3			
		Mol. Weight	Kg/Kmol			
		Viscosity	mPa's			
	Body	Type		BALL FULL BORE		
		Size		1" 1CS2		
Rating		RF Flange-S.S-150#				
Fire Safe Seat						
Body material						
Valve Seat						
Valve Seat material						
Actuator	Type		PNEUMATIC			
	Acition		SINGLE ACTION			
	Air supply press.	Barg	7			
	On Air Failure		OPEN			
	On Power Failure					
	SEAT Leakage Class ANSI					
ACCESSORIES	Melting conection valve		YES			
	Pressure gauge and filter		YES			
	Manual Control Wheel		NA			
	Cable Gland	Size/Qty	NA			
	Electrical Conection		NA			
	Tubing & Conection		SS Tube 1/4"			
	Switch	Protection	Certificate	NA	EExia-IIC T4	YES



1	0	12/27/2021	IFA	K.A	M.N
No.	Rev	Date	Status	Prepared	Checked
					AA.SH
					Approved


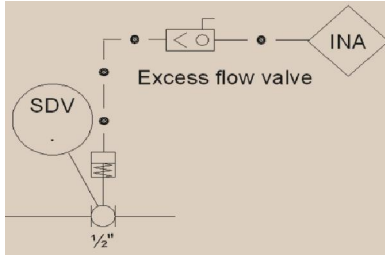
		PROJECT: PP-PE PILOT PLANT				 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		Safety Device Valve (SAFETY DEPRESSURIZE VALVE)					
		Contractor Job No:		Doc. No: 900-DAS-A4-IN-0002			
		Owner Job No:		Sheet No: 116 of 116			
Valve (HV)	General Data	Item		SDV 6202			
		Sevice		E 621 VENT			
		Location		E 621			
		P&I n.		312002_062			
		Fluid		NITROGEN			
		State		GAS			
	Condition	Normal Pressure	Barg	0.6			
		Normal DP	Barg	0.6			
		Max Pressure	Barg	1			
		Normal Temp.	°C	60			
		Max. Temp.	°C	-30 +180			
	Flowrate	Normal	Kg/h				
		Minimum	Kg/h	0			
		Full Scale	Kg/h	0			
	Sp. Gr.	Gas vapurs	Kg/m3				
		Liquid	Kg/m3				
		Mol. Weight	Kg/Kmol				
		Viscosity	mPa's				
	Body	Type	BALL FULL BORE				
		Size	1" 1CS2				
		Rating	RF Flange-S.S-150#				
		Fire Safe Seat					
		Body material					
		Valve Seat					
		Valve Seat material					
		Notes					
	Actuator	Type	PNEUMATIC				
		Acition	SINGLE ACTION				
Air supply press.		Barg	7				
On Air Failure		OPEN					
On Power Failure							
SEAT Leakage Class ANSI							
ACCESSORIES	Melting conection valve	YES					
	Pressure gauge and filter	YES					
	Manual Control Wheel	NA					
	Cable Gland	Size/Qty	NA				
	Electrical Conection	NA					
	Tubing & Conection	SS Tube 1/4"					
	Switch	Protection	Certificate	NA	EExia-IIC T4	YES	
							
1	0	12/27/2021	IFA	K.A	M.N	AA.SH	
No.	Rev	Date	Status	Prepared	Checked	Approved	

Table 2.

Items	Tag ID.	Quantity	Items	Tag ID.	Quantity
10	UV-0101	1	36	UV-3602	1
11	UV-0102	1	37	UV-3603	1
12	UV-0103	1	38	UV-5410 (NIL To SI541)	1
13	UV-0104	1	39	UV-5411 (NIL To SI542)	1
14	UV-0105	1	40	UV-5412 (NIL To SI543)	1
15	UV-0106	1	41	UV-6101 (P7) (3" #150 RF)	1
16	UV-0107	1	42	UV-6102	1
17	UV-0201	1	43	UV-6103	1
18	UV-0301	1	44	UV-6151 (P6) (3" #150 PAD RF)	1
19	UV-1201	1	45	UV-6201 (P5) (3" #150 PAD RF)	1
20	UV-1203 (TEA to V-123)	1	46	UV-6202	1
21	UV-1204 (Vent of V-123)	1	47	UV-6251 (P4) (2" #150 PAD RF)	1
22	UV-1205 (N2 to V-123)	1	48	UV-7101 (P9) (6" #300 PAD RF)	1
23	UV-1206 (Vent of V-123)	1	49	UV-7102	1
24	UV-1301	1	50	UV-7103 (P8) (6" #150 PAD RF)	1
25	UV-1401	1	51	UV-7104	1
26	UV-3202	1	52	UV-7105	1
27	UV-3402 (TK-343 Inlet)	1	53	UV-7106	1
28	UV-3403 (Depres. TK-343)	1	54	UV-7107	1
29	UV3501	1	55	UV-7153	1
30	UV3502	1	56	UV-7154	1
31	UV-3503 A	1	57	UV-4401	1
32	UV-3503 B	1	58	UV-4402	1
33	UV-3503 C	1	59	UV-4403	1
34	UV-3504	1	60	UV-4404	1
35	UV-3601	1			
Numbers			51		

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 1 of 167

General Data	1	Tag No.			UV-0101				
	2	P&ID	Line NO.	Piping Size	Piping Class	0001	0101	1"	1FS4
	3	Fluid			State	HYDROGEN		GAS	
	4	Pressure rating			Piping material	600 #		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara	86%	
	6	Area Classification			Quantity:	ZONE 1		1	
Flow Rate	7	Max.Continuous			Unit	6.7		Kg/h	
	8	Min.Continuous			Unit	0.804		Kg/h	
	9	Full scale			8.04				
	10	Max.In Transients			Unit			Kg/h	
Press	11	Allow. with closed valve			Unit			Kg/h	
	12	Norm . Op. upstr. Press			Unit	55		barg	
	13	Max inlet pressure			65				
	14	Dp. At max. flowrate			Unit			bar	
Temperature	15	Allow pressure drop			Unit	0.5		bar	
	16	Norm . upstr. Temp			Unit	AMB		-C	
	17	Max . upstr. Temp			Unit	120		-C	
Sp. Gr.	18	Gases vapours			Unit	2.01		Kg/m3	
	19	Liquids			Unit			Kg/m3	
	20	Mol.weight			Unit	2		Kg/Kmol	
Visc.	21	Viscosity at op cond			Unit	0.009		mpa's	
	22	Solid in suspension							
Cv	23	Min/Norm/Max		Required	VTA		VTA		
Body	24	Body type		Body material	Ball		SS - 316		
	25	Size Body		Port	1"		single		
	26	Design Pressure		Min. Bar a	Max. Bar a			Barg	
	27	Design Temperature		Min. °C	Max. °C			-C	
	28	Valve end con. & rating		Seat leakage class		Flange 600 #		ANSI IV	
	29	Packing mat.		Lubricator		PTFE		VTA	
	30	Flow direction							
Trim	31	Bonnet type			Standard				
	32	Plug type		Plug material	Ball		SS - 316		
	33	Seat Material		Cage/Guide Material	SS - 316		NA		
Actuator	34	Characteristics			Full bore				
	35	Type / Direction of action			Cylinder&Piston				
	36	Fail Position			Close				
	37	Spring range			VTA				
Positioner	38	On-Off/Modulating		Single/Double Acting	On/Off		Single Acting		
	39	Type			NA				
	40	Input signal		Out put signal	NA		NA		
	41	Air supply		Action dir.	NA		NA		
Solenoid Valve	42	Protection		Certificate	NA		NA		
	43	Type		QTY	3-Way		1		
	44	Tag No.			UY-0101				
	45	Supply Voltage		Consumption	24VDC		VTA (Ex-ib)		
Accessories	46	Protection		Certificate	IP 65		EExib-IIC T3		
	47	Pressure gauge and filter			YES				
	48	Manual Control Wheel			NO				
	49	Cable Gland		Size/Qty	NA				
	50	Electrical Conection			M20				
	51	Tubing & Conection			SS Tube 1/4"				
	52	Switch		Protection	Certificate	Open&Closed switches	IP 65	EExib-IIC T3	
No.	Rev	Date	Status	Prepared	Checked	Approved			
1	0	12/18/2021	IFA	K.A	M.N	AA.SH			

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 2 of 167

General Data	1	Tag No.			UV-0102				
	2	P&ID	Line NO.	Piping Size	Piping Class	0001	0101	1"	1FS4
	3	Fluid			State	ETHYLENE		GAS	
	4	Pressure rating			Piping material	600 #		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara	86%	
	6	Area Classification			Area	ZONE 1			
Flow Rate	7	Max.Continuous			Unit	450	Kg/h		
	8	Min.Continuous			Unit	54	Kg/h		
	9	Full scale				540			
	10	Max.In Transients			Unit		Kg/h		
Press	11	Allow. with closed valve			Unit		Kg/h		
	12	Norm . Op. upstr. Press			Unit	55	barg		
	13	Max inlet pressure				65			
	14	Dp. At max. flowrate			Unit		bar		
Temperature	15	Allow pressure drop			Unit	0.5	bar		
	16	Norm . upstr. Temp			Unit	AMB	-C		
	17	Max . upstr. Temp			Unit	120	-C		
Sp. Gr.	18	Gases vapours			Unit	18.8	Kg/m3		
	19	Liquids			Unit		Kg/m3		
	20	Mol.weight			Unit	28	Kg/Kmol		
Visc.	21	Viscosity at op cond			Unit	0.01	mpa's		
	22	Solid in suspension							
Cv	23	Min/Norm/Max		Required	VTA		VTA		
Body	24	Body type		Body material	Ball		SS - 316		
	25	Size Body		Port	1"		single		
	26	Design Pressure		Min. Bar a	Max. Bar a		Barg		
	27	Design Temperature		Min. °C	Max. °C		-C		
	28	Valve end con. & rating		Seat leakage class		Flange 600 #		ANSI IV	
	29	Packing mat.		Lubricator		PTFE		VTA	
	30	Flow direction							
Trim	31	Bonnet type			Standard				
	32	Plug type		Plug material	Ball		SS - 316		
	33	Seat Material		Cage/Guide Material	SS - 316		NA		
Actuator	34	Characteristics			Full bore				
	35	Type / Direction of action			Cylinder&Piston				
	36	Fail Position			Close				
	37	Spring range			VTA				
Positioner	38	On-Off/Modulating		Single/Double Acting	On/Off		Single Acting		
	39	Type			NA				
	40	Input signal		Out put signal	NA		NA		
	41	Air supply		Action dir.	NA		NA		
Solenoid Valve	42	Protection		Certificate	NA		NA		
	43	Type		QTY	3-Way		1		
	44	Tag No.			UY-0102				
	45	Supply Voltage		Consumption	24VDC		VTA (Ex-ib)		
Accessories	46	Protection		Certificate	IP 65		EExib-IIC T3		
	47	Pressure gauge and filter			YES				
	48	Manual Control Wheel			NO				
	49	Cable Gland		Size/Qty	NA				
	50	Electrical Conection			M20				
	51	Tubing & Conection			SS Tube 1/4"				
	52	Switch		Protection	Certificate	Open&Closed switches		IP 65 EExib-IIC T3	

1	0	12/18/2021	IFA	K.A	M.N	A.A.S.H
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 3 of 167

General Data	1	Tag No.			UV-0103				
	2	P&ID	Line NO.	Piping Size	Piping Class	0001	0101	1"	1FS4
	3	Fluid		State	PROPYLENE		LIQUID		
	4	Pressure rating		Piping material	600 #		STAINLESS STEEL		
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara	86%	
	6	Area Classification		Area	ZONE 1				
Flow Rate	7	Max.Continuous	Unit	850		Kg/h			
	8	Min.Continuous	Unit	102		Kg/h			
	9	Full scale		1020					
	10	Max.In Transients	Unit			Kg/h			
Press	11	Allow. with closed valve	Unit			Kg/h			
	12	Norm . Op. upstr. Press	Unit	55		barg			
	13	Max inlet pressure		65					
	14	Dp. At max. flowrate	Unit			bar			
Temperature	15	Allow pressure drop	Unit			bar			
	16	Norm . upstr. Temp	Unit	AMB		-C			
	17	Max . upstr. Temp	Unit	120		-C			
Sp. Gr.	18	Gases vapours	Unit			Kg/m3			
	19	Liquids	Unit	511		Kg/m3			
	20	Mol.weight	Unit	42		Kg/Kmol			
Visc.	21	Viscosity at op cond	Unit	0.068		mpa's			
	22	Solid in suspension							
Cv	23	Min/Norm/Max	Required	VTA		VTA			
Body	24	Body type	Body material	Ball		SS - 316			
	25	Size Body	Port	1"		single			
	26	Design Pressure	Min. Bar a	Max. Bar a			Barg		
	27	Design Temperature	Min. °C	Max. °C			-C		
	28	Valve end con. & rating	Seat leakage class	Flange 600 #		ANSI IV			
	29	Packing mat.	Lubricator	PTFE		VTA			
	30	Flow direction							
Trim	31	Bonnet type		Standard					
	32	Plug type	Plug material	Ball		SS - 316			
	33	Seat Material	Cage/Guide Material	SS - 316		NA			
Actuator	34	Characteristics		Full bore					
	35	Type / Direction of action		Cylinder&Piston					
	36	Fail Position		Close					
	37	Spring range		VTA					
Positioner	38	On-Off/Modulating	Single/Double Acting	On/Off		Single Acting			
	39	Type		NA					
	40	Input signal	Out put signal	NA		NA			
	41	Air supply	Action dir.	NA		NA			
Solenoid Valve	42	Protection	Certificate	NA		NA			
	43	Type	QTY	3-Way		1			
	44	Tag No.		UY-0103					
	45	Supply Voltage	Consumption	24VDC		VTA (Ex-ib)			
Accessories	46	Protection	Certificate	IP 65		EExib-IIC T3			
	47	Pressure gauge and filter		YES					
	48	Manual Control Wheel		NO					
	49	Cable Gland	Size/Qty	NA					
	50	Electrical Conection		M20					
	51	Tubing & Conection		SS Tube 1/4"					
	52	Switch	Protection	Certificate	Open&Closed switches	IP 65	EExib-IIC T3		

1	0	12/18/2021	IFA	K.A	M.N	A.A.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 4 of 167

General Data	1	Tag No.			UV-0104				
	2	P&ID	Line NO.	Piping Size	Piping Class	0001	0101	1"	1FS4
	3	Fluid			State	BUTENE		LIQUID	
	4	Pressure rating			Piping material	600 #		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara	86%	
	6	Area Classification			Area	ZONE 1			
Flow Rate	7	Max.Continuous	Unit	250			Kg/h		
	8	Min.Continuous	Unit	30			Kg/h		
	9	Full scale		300					
	10	Max.In Transients	Unit				Kg/h		
Press	11	Allow. with closed valve	Unit				Kg/h		
	12	Norm . Op. upstr. Press	Unit	55			barg		
	13	Max inlet pressure		65					
	14	Dp. At max. flowrate	Unit				bar		
Temperature	15	Allow pressure drop	Unit				bar		
	16	Norm . upstr. Temp	Unit	AMB			-C		
	17	Max . upstr. Temp	Unit	100			-C		
Sp. Gr.	18	Gases vapours	Unit				Kg/m3		
	19	Liquids	Unit	589			Kg/m3		
	20	Mol.weight	Unit	56			Kg/Kmol		
Visc.	21	Viscosity at op cond	Unit	0.14			mpa's		
	22	Solid in suspension							
Cv	23	Min/Norm/Max	Required	VTA			VTA		
Body	24	Body type	Body material	Ball			SS - 316		
	25	Size Body	Port	1"			single		
	26	Design Pressure	Min. Bar a	Max. Bar a				Barg	
	27	Design Temperature	Min. °C	Max. °C				-C	
	28	Valve end con. & rating	Seat leakage class	Flange 600 #				ANSI IV	
	29	Packing mat.	Lubricator	PTFE				VTA	
	30	Flow direction							
Trim	31	Bonnet type		Standard					
	32	Plug type	Plug material	Ball			SS - 316		
	33	Seat Material	Cage/Guide Material	SS - 316			NA		
Actuator	34	Characteristics		Full bore					
	35	Type / Direction of action		Cylinder&Piston					
	36	Fail Position		Close					
	37	Spring range		VTA					
Positioner	38	On-Off/Modulating	Single/Double Acting	On/Off			Single Acting		
	39	Type		NA					
	40	Input signal	Out put signal	NA			NA		
	41	Air supply	Action dir.	NA			NA		
Solenoid Valve	42	Protection	Certificate	NA			NA		
	43	Type	QTY	3-Way			1		
	44	Tag No.		UY-0104					
	45	Supply Voltage	Consumption	24VDC			VTA (Ex-ib)		
Accessories	46	Protection	Certificate	IP 65			EExib-IIC T3		
	47	Pressure gauge and filter		YES					
	48	Manual Control Wheel		NO					
	49	Cable Gland	Size/Qty	NA					
	50	Electrical Conection		M20					
	51	Tubing & Conection		SS Tube 1/4"					
	52	Switch	Protection	Certificate	Open&Closed switches	IP 65	EExib-IIC T3		

1	0	12/18/2021	IFA	K.A	M.N	A.A.S.H
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 5 of 167

General Data	1	Tag No.			UV-0105				
	2	P&ID	Line NO.	Piping Size	Piping Class	0001	0101	1"	1CS1
	3	Fluid			State	HEXANE		LIQUID	
	4	Pressure rating			Piping material	150 #		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara	86%	
	6	Area Classification			Area	ZONE 1			
Flow Rate	7	Max.Continuous	Unit	50	Kg/h				
	8	Min.Continuous	Unit	6	Kg/h				
	9	Full scale		60					
	10	Max.In Transients	Unit		Kg/h				
Press	11	Allow. with closed valve	Unit		Kg/h				
	12	Norm . Op. upstr. Press	Unit	5	barg				
	13	Max inlet pressure		10					
	14	Dp. At max. flowrate	Unit		bar				
Temperature	15	Allow pressure drop	Unit		bar				
	16	Norm . upstr. Temp	Unit	AMB	-C				
	17	Max . upstr. Temp	Unit	170	-C				
Sp. Gr.	18	Gases vapours	Unit		Kg/m3				
	19	Liquids	Unit	658	Kg/m3				
	20	Mol.weight	Unit	86	Kg/Kmol				
Visc.	21	Viscosity at op cond	Unit	0.3	mpa's				
	22	Solid in suspension							
Cv	23	Min/Norm/Max	Required	VTA		VTA			
Body	24	Body type	Body material	Ball		SS - 316			
	25	Size Body	Port	1"		single			
	26	Design Pressure	Min. Bar a	Max. Bar a		Barg			
	27	Design Temperature	Min. °C	Max. °C		-C			
	28	Valve end con. & rating	Seat leakage class	Flange 150 #		ANSI IV			
	29	Packing mat.	Lubricator	PTFE		VTA			
	30	Flow direction							
Trim	31	Bonnet type		Standard					
	32	Plug type	Plug material	Ball		SS - 316			
	33	Seat Material	Cage/Guide Material	SS - 316		NA			
Actuator	34	Characteristics		Full bore					
	35	Type / Direction of action		Cylinder&Piston					
	36	Fail Position		Close					
	37	Spring range		VTA					
Positioner	38	On-Off/Modulating	Single/Double Acting	On/Off		Single Acting			
	39	Type		NA					
	40	Input signal	Out put signal	NA		NA			
	41	Air supply	Action dir.	NA		NA			
Solenoid Valve	42	Protection	Certificate	NA		NA			
	43	Type	QTY	3-Way		1			
	44	Tag No.		UY-0105					
	45	Supply Voltage	Consumption	24VDC		VTA (Ex-ib)			
Accessories	46	Protection	Certificate	IP 65		EExib-IIC T3			
	47	Pressure gauge and filter		YES					
	48	Manual Control Wheel		NO					
	49	Cable Gland	Size/Qty	NA					
	50	Electrical Conection		M20					
	51	Tubing & Conection		SS Tube 1/4"					
	52	Switch	Protection	Certificate	Open&Closed switches	IP 65	EExib-IIC T3		

1	0	12/18/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 6 of 167

General Data	1	Tag No.			UV-0106				
	2	P&ID	Line NO.	Piping Size	Piping Class	0001	0101	1"	1FS4
	3	Fluid			State	PROPANE		LIQUID	
	4	Pressure rating			Piping material	600 #		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara	86%	
	6	Area Classification			Area	ZONE 1			
Flow Rate	7	Max.Continuous			Unit	500	Kg/h		
	8	Min.Continuous			Unit	60	Kg/h		
	9	Full scale				600			
	10	Max.In Transients			Unit		Kg/h		
Press	11	Allow. with closed valve			Unit		Kg/h		
	12	Norm . Op. upstr. Press			Unit	55	barg		
	13	Max inlet pressure				65			
	14	Dp. At max. flowrate			Unit		bar		
Temperature	15	Allow pressure drop			Unit		bar		
	16	Norm . upstr. Temp			Unit	AMB	-C		
	17	Max . upstr. Temp			Unit	150	-C		
Sp. Gr.	18	Gases vapours			Unit		Kg/m3		
	19	Liquids			Unit	509	Kg/m3		
	20	Mol.weight			Unit	44	Kg/Kmol		
Visc.	21	Viscosity at op cond			Unit	0.1	mpa's		
	22	Solid in suspension							
Cv	23	Min/Norm/Max		Required	VTA		VTA		
Body	24	Body type		Body material	Ball		SS - 316		
	25	Size Body		Port	1"		single		
	26	Design Pressure		Min. Bar a	Max. Bar a		Barg		
	27	Design Temperature		Min. °C	Max. °C		-C		
	28	Valve end con. & rating		Seat leakage class		Flange 600 #		ANSI IV	
	29	Packing mat.		Lubricator		PTFE		VTA	
	30	Flow direction							
Trim	31	Bonnet type			Standard				
	32	Plug type		Plug material	Ball		SS - 316		
	33	Seat Material		Cage/Guide Material	SS - 316		NA		
Actuator	34	Characteristics			Full bore				
	35	Type / Direction of action			Cylinder&Piston				
	36	Fail Position			Close				
	37	Spring range			VTA				
Positioner	38	On-Off/Modulating		Single/Double Acting	On/Off		Single Acting		
	39	Type			NA				
	40	Input signal		Out put signal	NA		NA		
	41	Air supply		Action dir.	NA		NA		
Solenoid Valve	42	Protection		Certificate	NA		NA		
	43	Type		QTY	3-Way		1		
	44	Tag No.			UY-0106				
	45	Supply Voltage		Consumption	24VDC		VTA (Ex-ib)		
Accessories	46	Protection		Certificate	IP 65		EExib-IIC T3		
	47	Pressure gauge and filter			YES				
	48	Manual Control Wheel			NO				
	49	Cable Gland		Size/Qty	NA				
	50	Electrical Conection			M20				
	51	Tubing & Conection			SS Tube 1/4"				
	52	Switch		Protection	Certificate	Open&Closed switches		IP 65 EExib-IIC T3	

1	0	12/18/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 7 of 167

General Data	1	Tag No.			UV-0107				
	2	P&ID	Line NO.	Piping Size	Piping Class	0001	0101	1"	1FS4
	3	Fluid			State	HEXENE		LIQUID	
	4	Pressure rating			Piping material	600 #		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara	86%	
	6	Area Classification			Area	ZONE 1			
Flow Rate	7	Max.Continuous			Unit	250	Kg/h		
	8	Min.Continuous			Unit	30	Kg/h		
	9	Full scale				300			
	10	Max.In Transients			Unit		Kg/h		
Press	11	Allow. with closed valve			Unit		Kg/h		
	12	Norm . Op. upstr. Press			Unit	55	barg		
	13	Max inlet pressure				65			
	14	Dp. At max. flowrate			Unit		bar		
Temperature	15	Allow pressure drop			Unit		bar		
	16	Norm . upstr. Temp			Unit	AMB	-C		
	17	Max . upstr. Temp			Unit	150	-C		
Sp. Gr.	18	Gases vapours			Unit		Kg/m3		
	19	Liquids			Unit	676	Kg/m3		
	20	Mol.weight			Unit	84	Kg/Kmol		
Visc.	21	Viscosity at op cond			Unit	0.24	mpa's		
	22	Solid in suspension							
Cv	23	Min/Norm/Max		Required	VTA		VTA		
Body	24	Body type		Body material	Ball		SS - 316		
	25	Size Body		Port	1"		single		
	26	Design Pressure		Min. Bar a	Max. Bar a		Barg		
	27	Design Temperature		Min. °C	Max. °C		-C		
	28	Valve end con. & rating		Seat leakage class		Flange 600 #		ANSI IV	
	29	Packing mat.		Lubricator		PTFE		VTA	
	30	Flow direction							
Trim	31	Bonnet type			Standard				
	32	Plug type		Plug material	Ball		SS - 316		
	33	Seat Material		Cage/Guide Material	SS - 316		NA		
Actuator	34	Characteristics			Full bore				
	35	Type / Direction of action			Cylinder&Piston				
	36	Fail Position			Close				
	37	Spring range			VTA				
Positioner	38	On-Off/Modulating		Single/Double Acting	On/Off		Single Acting		
	39	Type			NA				
	40	Input signal		Out put signal	NA		NA		
	41	Air supply		Action dir.	NA		NA		
Solenoid Valve	42	Protection		Certificate	NA		NA		
	43	Type		QTY	3-Way		1		
	44	Tag No.			UY-0107				
	45	Supply Voltage		Consumption	24VDC		VTA (Ex-ib)		
Accessories	46	Protection		Certificate	IP 65		EExib-IIC T3		
	47	Pressure gauge and filter			YES				
	48	Manual Control Wheel			NO				
	49	Cable Gland		Size/Qty	NA				
	50	Electrical Conection			M20				
	51	Tubing & Conection			SS Tube 1/4"				
	52	Switch		Protection	Certificate	Open&Closed switches		IP 65	EExib-IIC T3

1	0	12/18/2021	IFA	K.A	M.N	A.A.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: ON/OFF Valve Data Sheet

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 14 of 167

General Data	1	Tag No.			UV-0201				
	2	P&ID	Line NO.	Piping Size	Piping Class	0002	0201	1"	1CS2(W)
	3	Fluid			State				
	4	Pressure rating			Demineralized Water				
	5	Amb.Temp		Amb Press	Piping material		150 #		
	6	Area Classification			STAINLESS STEEL				
Flow Rate	7	Max.Continuous			Unit		ZONE 1		
	8	Min.Continuous			Unit		1000		
	9	Max.In Transients			Unit		85		
	10	Allow. with closed valve			Unit		1170		
Press	11	Norm . Op. upstr. Press			Unit		0		
	12	Dp. At max. flowrate			Unit		6		
	13	Max. Dp with closed valve			Unit		6		
Temperature	14	Norm . upstr. Temp			Unit		8		
	15	Max . upstr. Temp			Unit		25		
Sp. Gr.	16	Gases vapours			Unit		°C		
	17	Liquids			Unit		50		
	18	Mol.weight			Unit		Kg/m3		
Visc.	19	Op. visc. (when>5mpa's)			0.7 m pa's				
	20	Solid in suspension			NO				
Cv	21	Min/Norm/Max			Required		VTA		
	22	Body type			Body material		VTA		
Body	23	Size Body			Port		Ball		
	24	Design Pressure			Min. Bar a	Max. Bar a	1"		
	25	Design Temperature			Min. °C	Max. °C	Double		
	26	Valve end con. & rating			Seat leakage class		Barg		
	27	Packing mat.			Lubricator		°C		
	28	Flow direction			Flange 150 #		ANSI IV		
	29	Bonnet type			PTFE		VTA		
	30	Plug type			Plug material		Standard		
Trim	31	Seat Material			Cage/Guide Material		Ball		
	32	Characteristics			Full bore		SS - 316		
Actuator	33	Type / Direction of action			Cylinder&Piston				
	34	Fail Position			Close				
	35	Spring range			NA				
Positioner	36	On-Off/Modulating			Single/Double Acting		On/Off		
	37	Type			Double Acting				
	38	Input signal			Out put signal		NA		
	39	Air supply			Action dir.		NA		
Solenoid Valve	40	Protection			Certificate		NA		
	41	Type			QTY		4-Way		
	42	Tag No.			UY-0201				
Accessories	43	Supply Voltage			Consumption		24VDC		
	44	Protection			Certificate		IP 65		
	45	Pressure gauge and filter			YES				
	46	Manual Control Wheel			NA				
	47	Cable Gland			Size/Qty		NA		
	48	Electrical Conection			M20				
49	Tubing & Conection			SS Tube 1/4"					
50	Switch			Protection	Certificate	CLOSE & OPEN SWITCH	IP 65	EEExib-IIB T3	

1	0	12/18/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: ON/OFF Valve Data Sheet

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 14 of 167

General Data	1	Tag No.			UV-0301				
	2	P&ID	Line NO.	Piping Size	Piping Class	0002	0301	1"	1CS2
	3	Fluid			State		Demineralized Water		
	4	Pressure rating			Piping material		150 # STAINLESS STEEL		
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max		(-20)°C / 50°C		0.82 Bara	86%
	6	Area Classification			Area		ZONE 1		
Flow Rate	7	Max.Continuous		Unit	1000		Kg/h		
	8	Min.Continuous		Unit	85		Kg/h		
	9	Max.In Transients		Unit	1170		Kg/h		
	10	Allow. with closed valve		Unit	0		Kg/h		
Press	11	Norm . Op. upstr. Press		Unit	6		barg		
	12	Dp. At max. flowrate		Unit	6		bar		
	13	Max. Dp with closed valve		Unit	8		bar		
Temperature	14	Norm . upstr. Temp		Unit	25		°C		
	15	Max . upstr. Temp		Unit	50		°C		
Sp. Gr.	16	Gases vapours		Unit			Kg/m3		
	17	Liquids		Unit	1000		Kg/m3		
	18	Mol.weight		Unit	18		Kg/Kmol		
Visc.	19	Op. visc. (when>5mpa's)			0.7 m pa's				
	20	Solid in suspension			NO				
Cv	21	Min/Norm/Max		Required	VTA		VTA		
	22	Body type		Body material	Ball		SS-316		
Body	23	Size Body		Port	1"		Double		
	24	Design Pressure		Min. Bar a	Max. Bar a			Barg	
	25	Design Temperature		Min. °C	Max. °C			°C	
	26	Valve end con. & rating		Seat leakage class		Flange 150 #		ANSI IV	
	27	Packing mat.		Lubricator		PTFE		VTA	
	28	Flow direction							
	29	Bonnet type			Standard				
	Trim	30	Plug type		Plug material	Ball		SS - 316	
31		Seat Material		Cage/Guide Material	SS - 316		NA		
32		Characteristics			Full bore				
Actuator	33	Type / Direction of action			Cylinder&Piston				
	34	Fail Position			Close				
	35	Spring range			NA				
	36	On-Off/Modulating		Single/Double Acting	On/Off		Double Acting		
Positioner	37	Type			NA				
	38	Input signal		Out put signal	NA		NA		
	39	Air supply		Action dir.	NA		NA		
	40	Protection		Certificate	NA		NA		
Solenoid Valve	41	Type		QTY	4-Way		1		
	42	Tag No.			UY-0301				
	43	Supply Voltage		Consumption	24VDC		VTA (Ex-ib)		
	44	Protection		Certificate	IP 65		EExib-IIB T3		
Accessories	45	Pressure gauge and filter			YES				
	46	Manual Control Wheel			NA				
	47	Cable Gland		Size/Qty	NA				
	48	Electrical Conection			M20				
	49	Tubing & Conection			SS Tube 1/4"				
	50	Switch	Protection	Certificate	CLOSE & OPEN SWITCH	IP 65	EExib-IIB T3		

1	0	12/18/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 18 of 167

General Data	1	Tag No.			UV-1201				
	2	P&ID	Line NO.	Piping Size	Piping Class	0012	1201	1/2"	1CS1
	3	Fluid			State		Alkyl in hexane		
	4	Pressure rating			Piping material		150# STAINLESS STEEL		
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara		86%
	6	Area Classification			Quantity		ZONE 1		2
Flow Rate	7	Max.Continuous			Unit	750		Kg/h	
	8	Min.Continuous			Unit	50		Kg/h	
	9	Max.In Transients			Unit	1000		Kg/h	
	10	Allow. with closed valve			Unit	0		Kg/h	
Press	11	Norm . Op. upstr. Press			Unit	3		barg	
	12	Dp. At max. flowrate			Unit	2.9		bar	
	13	Max. Dp with closed valve			Unit	6		bar	
Temperature	14	Norm . upstr. Temp			Unit	30		-C	
	15	Max . upstr. Temp			Unit	180		-C	
Sp. Gr.	16	Gases vapours			Unit	1.2		Kg/m3	
	17	Liquids			Unit	625		Kg/m3	
	18	Mol.weight			Unit			Kg/Kmol	
Visc.	19	Op. visc. (when>5mpa's)							
	20	Solid in suspension							
Cv	21	Min/Norm/Max			Required		VTA		VTA
	22	Body type			Body material		Super thin Ball valve		SS - 316
Body	23	Size Body			Port		1/2"		single
	24	Design Pressure			Min. Bar a	Max. Bar a			Barg
	25	Design Temperature			Min. °C	Max. °C			-C
	26	Valve end con. & rating			Seat leakage class		Flange 150#		ANSI IV
	27	Packing mat.			Lubricator		PTFE		VTA
	28	Flow direction							
	29	Bonnet type			Standard				
	Trim	30	Plug type			Plug material		Ball	
31		Seat Material			Cage/Guide Material		SS - 316		NA
32		Characteristics			NA				
Actuator	33	Type / Direction of action			Cylinder&Piston				
	34	Fail Position			Close				
	35	Spring range			VTA				
	36	On-Off/Modulating			Single/Double Acting		On/Off		Single Acting
Positioner	37	Type			NA				
	38	Input signal			Out put signal		NA		NA
	39	Air supply			Action dir.		NA		NA
	40	Protection			Certificate		NA		NA
Solenoid Valve	41	Type			QTY		3-Way		1
	42	Tag No.			UY-1201				
	43	Supply Voltage			Consumption		24VDC		VTA (Ex-ib)
	44	Protection			Certificate		IP 65		EEExib-IIB T3
Accessories	45	Pressure gauge and filter			yes				
	46	Manual Control Wheel			NA				
	47	Cable Gland			Size/Qty		NA		
	48	Electrical Conection			M20				
	49	Tubing & Conection			NA				
	50	Switch			Protection	Certificate	CLOSE & OPEN SWITCH	IP 65	EEExib-IIB T3
1	0	12/18/2021		IFA	K.A	M.N	AA.SH		
No.	Rev	Date		Status	Prepared	Checked	Approved		

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 18 of 167

General Data	1	Tag No.			UV-1203 (TEA to V-123)				
	2	P&ID	Line NO.	Piping Size	Piping Class	0012	1201	1/2"	1CS1
	3	Fluid			State	Alkyl in hexane		Liquid	
	4	Pressure rating			Piping material	150#		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara	86%	
	6	Area Classification			Area	ZONE 1			
Flow Rate	7	Max.Continuous			Unit				Kg/h
	8	Min.Continuous			Unit				Kg/h
	9	Max.In Transients			Unit				Kg/h
	10	Allow. with closed valve			Unit				Kg/h
Press	11	Norm . Op. upstr. Press			Unit	0.2		barg	
	12	Max . Op. upstr. Press			Unit	1.2		bar	
	13	Norm. downstr. Press			Unit	0.2		bar	
Temperature	14	Norm . upstr. Temp			Unit	AMB		°C	
	15	Max . upstr. Temp			Unit	AMB		°C	
Sp. Gr.	16	Gases vapours			Unit	1.2		Kg/m3	
	17	Liquids			Unit	625		Kg/m3	
	18	Mol.weight			Unit			Kg/Kmol	
Visc.	19	Op. visc. (when>5mpa's)							
	20	Solid in suspension							
Cv	21	Min/Norm/Max			Required	VTA		VTA	
	22	Body type			Body material	Full Bore Ball valve		SS - 316	
Body	23	Size Body			Port	1/2"		single	
	24	Design Pressure			Min. Bar a	Max. Bar a			Barg
	25	Design Temperature			Min. °C	Max. °C			°C
	26	Valve end con. & rating			Seat leakage class	Flange 150#		ANSI IV	
	27	Packing mat.			Lubricator	PTFE		VTA	
	28	Flow direction							
	29	Bonnet type			Standard				
	Trim	30	Plug type			Plug material	Ball		SS - 316
31		Seat Material			Cage/Guide Material	SS - 316		NA	
32		Characteristics			Full Bore				
Actuator	33	Type / Direction of action			Cylinder&Piston				
	34	Fail Position			Close				
	35	Spring range			VTA				
	36	On-Off/Modulating			Single/Double Acting	On/Off		Single Acting	
Positioner	37	Type			NA				
	38	Input signal			Out put signal	NA		NA	
	39	Air supply			Action dir.	NA		NA	
	40	Protection			Certificate	NA		NA	
Solenoid Valve	41	Type			QTY	3-Way		1	
	42	Tag No.			UY-1203				
	43	Supply Voltage			Consumption	24VDC		VTA (Ex-ib)	
	44	Protection			Certificate	IP 65		EEExib-IIB T3	
Accessories	45	Pressure gauge and filter			yes				
	46	Manual Control Wheel			NA				
	47	Cable Gland			Size/Qty	NA			
	48	Electrical Conection			M20				
	49	Tubing & Conection			SS Tube 1/4"				
	50	Switch			Protection	Certificate	CLOSE & OPEN SWITCH	IP 65	EEExib-IIB T3
1	0	12/18/2021			IFA	K.A	M.N	AA.SH	
No.	Rev	Date			Status	Prepared	Checked	Approved	

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 18 of 167

General Data	1	Tag No.			UV-1204 (Vent of V-123)				
	2	P&ID	Line NO.	Piping Size	Piping Class	0012	1201	1/2"	1CS1
	3	Fluid			State	Nitroge+Hexane		Vapours	
	4	Pressure rating			Piping material	150#		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara	86%	
	6	Area Classification			Quantity	ZONE 1		2	
Flow Rate	7	Max.Continuous			Unit			Kg/h	
	8	Min.Continuous			Unit			Kg/h	
	9	Max.In Transients			Unit			Kg/h	
	10	Allow. with closed valve			Unit			Kg/h	
Press	11	Norm . Op. upstr. Press			Unit	0.2		barg	
	12	Max . Op. upstr. Press			Unit	1.2		bar	
	13	Norm. downstr. Press			Unit	0.2		bar	
Temperature	14	Norm . upstr. Temp			Unit	AMB		°C	
	15	Max . upstr. Temp			Unit	AMB		°C	
Sp. Gr.	16	Gases vapours			Unit	1.2		Kg/m3	
	17	Liquids			Unit	625		Kg/m3	
	18	Mol.weight			Unit			Kg/Kmol	
Visc.	19	Op. visc. (when>5mpa's)							
	20	Solid in suspension							
Cv	21	Min/Norm/Max			Required	VTA		VTA	
	22	Body type			Body material	Full Bore Ball valve		SS - 316	
Body	23	Size Body			Port	1/2"		single	
	24	Design Pressure			Min. Bar a Max. Bar a			Barg	
	25	Design Temperature			Min. °C Max. °C			°C	
	26	Valve end con. & rating			Seat leakage class	Flange 150#		ANSI IV	
	27	Packing mat.			Lubricator	PTFE		VTA	
	28	Flow direction							
	29	Bonnet type					Standard		
	Trim	30	Plug type			Plug material	Ball		SS - 316
31		Seat Material			Cage/Guide Material	SS - 316		NA	
32		Characteristics					Full Bore Ball valve		
Actuator	33	Type / Direction of action					Cylinder&Piston		
	34	Fail Position					Close		
	35	Spring range					VTA		
	36	On-Off/Modulating			Single/Double Acting	On/Off		Single Acting	
Positioner	37	Type					NA		
	38	Input signal			Out put signal	NA		NA	
	39	Air supply			Action dir.	NA		NA	
	40	Protection			Certificate	NA		NA	
Solenoid Valve	41	Type			QTY	3-Way		1	
	42	Tag No.					UY-1204		
	43	Supply Voltage			Consumption	24VDC		VTA (Ex-ib)	
	44	Protection			Certificate	IP 65		EEExib-IIB T3	
Accessories	45	Pressure gauge and filter					yes		
	46	Manual Control Wheel					NA		
	47	Cable Gland			Size/Qty	NA			
	48	Electrical Conection					M20		
	49	Tubing & Conection					SS Tube 1/4"		
	50	Switch			Protection	Certificate	CLOSE & OPEN SWITCH	IP 65	EEExib-IIB T3
1	0	12/18/2021			IFA	K.A	M.N	AA.SH	
No.	Rev	Date			Status	Prepared	Checked	Approved	

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: _____
Owner Job No: _____ Sheet No: _____ of _____

General Data	1	Tag No.			UV-1205 (N2 to V-123)		
	2	P&ID	Line NO.	Piping Size	Piping Class	1/2"	1CS1
	3	Fluid		State	N2	Gas	
	4	Pressure rating		Piping material	150#	STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C	0.82 Bara	86%
	6	Area Classification		Area	ZONE 1		
Flow Rate	7	Max.Continuous		Unit	Kg/h		
	8	Min.Continuous		Unit	Kg/h		
	9	Max.In Transients		Unit	Kg/h		
	10	Allow. with closed valve		Unit	Kg/h		
Press	11	Norm . Op. upstr. Press		Unit	1.2	barg	
	12	Max . Op. upstr. Press		Unit	3.5	bar	
	13	Norm. downstr. Press		Unit	0.24	bar	
Temperature	14	Norm . upstr. Temp		Unit	AMB	°C	
	15	Max . upstr. Temp		Unit	AMB	°C	
Sp. Gr.	16	Gases vapours		Unit	1.2	Kg/m3	
	17	Liquids		Unit		Kg/m3	
	18	Mol.weight		Unit		Kg/Kmol	
Visc.	19	Op. visc. (when>5mpa's)					
	20	Solid in suspension					
Cv	21	Min/Norm/Max		Required	VTA	VTA	
	22	Body type		Body material	Full Bore Ball valve	SS - 316	
Body	23	Size Body		Port	1/2"	single	
	24	Design Pressure		Min. Bar a Max. Bar a		Barg	
	25	Design Temperature		Min. °C Max. °C		°C	
	26	Valve end con. & rating		Seat leakage class	Flange 150#	ANSI IV	
	27	Packing mat.		Lubricator	PTFE	VTA	
	28	Flow direction					
	29	Bonnet type			Standard		
	Trim	30	Plug type		Plug material	Ball	SS - 316
31		Seat Material		Cage/Guide Material	SS - 316	NA	
32		Characteristics			Full Bore Ball valve		
Actuator	33	Type / Direction of action			Cylinder&Piston		
	34	Fail Position			Close		
	35	Spring range			VTA		
	36	On-Off/Modulating		Single/Double Acting	On/Off	Single Acting	
Positioner	37	Type			NA		
	38	Input signal		Out put signal	NA	NA	
	39	Air supply		Action dir.	NA	NA	
	40	Protection		Certificate	NA	NA	
Solenoid Valve	41	Type		QTY	3-Way	1	
	42	Tag No.			UY-1205		
	43	Supply Voltage		Consumption	24VDC	VTA (Ex-ib)	
	44	Protection		Certificate	IP 65	EEExib-IIB T3	
Accessories	45	Pressure gauge and filter			yes		
	46	Manual Control Wheel			NA		
	47	Cable Gland		Size/Qty	NA		
	48	Electrical Conection			M20		
	49	Tubing & Conection			SS Tube 1/4"		
	50	Switch	Protection	Certificate	CLOSE & OPEN SWITCH	IP 65	EEExib-IIB T3

1	0	12/18/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: _____
Owner Job No: _____ Sheet No: _____ of _____

General Data	1	Tag No.			UV-1206 (Vent of V-123)		
	2	P&ID	Line NO.	Piping Size	Piping Class	1/2"	1CS1
	3	Fluid		State	N2+Hexane Vapours		Vapours
	4	Pressure rating		Piping material	150#		STAINLESS STEEL
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C	0.82 Bara	86%
	6	Area Classification		Area	ZONE 1		
Flow Rate	7	Max.Continuous		Unit			Kg/h
	8	Min.Continuous		Unit			Kg/h
	9	Max.In Transients		Unit			Kg/h
	10	Allow. with closed valve		Unit			Kg/h
Press	11	Norm . Op. upstr. Press		Unit	3.5		barg
	12	Max . Op. upstr. Press		Unit			bar
	13	Norm. downstr. Press		Unit	0.2		bar
Temperature	14	Norm . upstr. Temp		Unit	AMB		-C
	15	Max . upstr. Temp		Unit	AMB		-C
Sp. Gr.	16	Gases vapours		Unit	1.2		Kg/m3
	17	Liquids		Unit			Kg/m3
	18	Mol.weight		Unit			Kg/Kmol
Visc.	19	Op. visc. (when>5mpa's)					
	20	Solid in suspension					
Cv	21	Min/Norm/Max		Required	VTA		VTA
	22	Body type		Body material	Full Bore Ball valve		SS - 316
Body	23	Size Body		Port	1/2"		single
	24	Design Pressure		Min. Bar a Max. Bar a			Barg
	25	Design Temperature		Min. °C Max. °C			-C
	26	Valve end con. & rating		Seat leakage class	Flange 150#		ANSI IV
	27	Packing mat.		Lubricator	PTFE		VTA
	28	Flow direction					
	29	Bonnet type			Standard		
	Trim	30	Plug type		Plug material	Ball	
31		Seat Material		Cage/Guide Material	SS - 316		NA
32		Characteristics			Full Bore Ball valve		
Actuator	33	Type / Direction of action			Cylinder&Piston		
	34	Fail Position			Close		
	35	Spring range			VTA		
	36	On-Off/Modulating		Single/Double Acting	On/Off		Single Acting
Positioner	37	Type			NA		
	38	Input signal		Out put signal	NA		NA
	39	Air supply		Action dir.	NA		NA
	40	Protection		Certificate	NA		NA
Solenoid Valve	41	Type		QTY	3-Way		1
	42	Tag No.			UY-1206		
	43	Supply Voltage		Consumption	24VDC		VTA (Ex-ib)
	44	Protection		Certificate	IP 65		EEExib-IIB T3
Accessories	45	Pressure gauge and filter			yes		
	46	Manual Control Wheel			NA		
	47	Cable Gland		Size/Qty	NA		
	48	Electrical Conection			M20		
	49	Tubing & Conection			SS Tube 1/4"		
	50	Switch		Protection	Certificate	CLOSE & OPEN SWITCH	IP 65

1	0	12/18/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 19 of 167

General Data	1	Tag No.			UV-1301				
	2	P&ID	Line NO.	Piping Size	Piping Class	0013	1303	1/2"	1CS1
	3	Fluid			State	Donor in hexane			
	4	Pressure rating			Piping material	150 #		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara		86%
	6	Area Classification			Area	ZONE 1			
Flow Rate	7	Max.Continuous			Unit	750		Kg/h	
	8	Min.Continuous			Unit	50		Kg/h	
	9	Max.In Transients			Unit	1000		Kg/h	
	10	Allow. with closed valve			Unit	0		Kg/h	
Press	11	Norm . Op. upstr. Press			Unit	3		barg	
	12	Dp. At max. flowrate			Unit	2.9		bar	
	13	Max. Dp with closed valve			Unit	6		bar	
Temperature	14	Norm . upstr. Temp			Unit	30		°C	
	15	Max . upstr. Temp			Unit	180		°C	
Sp. Gr.	16	Gases vapours			Unit	1.7		Kg/m3	
	17	Liquids			Unit	625		Kg/m3	
	18	Mol.weight			Unit			Kg/Kmol	
Visc.	19	Op. visc. (when>5mpa's)							
	20	Solid in suspension			NO				
Cv	21	Min/Norm/Max			Required	VTA		VTA	
	22	Body type			Body material	Super thin Ball valve		SS - 316	
Body	23	Size Body			Port	1/2"		single	
	24	Design Pressure			Min. Bar a	Max. Bar a			Barg
	25	Design Temperature			Min. °C	Max. °C			°C
	26	Valve end con. & rating			Seat leakage class	Flange 150 #		ANSI IV	
	27	Packing mat.			Lubricator	PTFE		VTA	
	28	Flow direction							
	29	Bonnet type			Standard				
	Trim	30	Plug type			Plug material	Ball		SS - 316
31		Seat Material			Cage/Guide Material	SS - 316		NA	
32		Characteristics			NA				
Actuator	33	Type / Direction of action			Cylinder&Piston				
	34	Fail Position			Close				
	35	Spring range			VTA				
	36	On-Off/Modulating			Single/Double Acting	On/Off		Single Acting	
Positioner	37	Type			NA				
	38	Input signal			Out put signal	NA		NA	
	39	Air supply			Action dir.	NA		NA	
	40	Protection			Certificate	NA		NA	
Solenoid Valve	41	Type			QTY	3-Way		1	
	42	Tag No.			UY-1301				
	43	Supply Voltage			Consumption	24VDC		VTA (Ex-ib)	
	44	Protection			Certificate	IP 65		EExib-IIB T3	
Accessories	45	Pressure gauge and filter			yes				
	46	Manual Control Wheel			NA				
	47	Cable Gland			Size/Qty	NA			
	48	Electrical Conection			M20				
	49	Tubing & Conection			NA				
	50	Switch			Protection	Certificate	CLOSE & OPEN SWITCH	IP 65	EExib-IIB T3
1	0	12/18/2021		IFA	K.A	M.N	AA.SH		
No.	Rev	Date		Status	Prepared	Checked	Approved		

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 76 of 167

General Data	1	Tag No.			UV-3202				
	2	P&ID	Line NO.	Piping Size	Piping Class	0032	3202	2"	2DS4
	3	Fluid			State			Cooling Water Return	
	4	Pressure rating			Piping material			300# STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max		(-20)°C / 50°C	0.82 Bara	86%	
	6	Area Classification			Area			ZONE 1	
Flow Rate	7	Max.Continuous			Unit			Kg/h	
	8	Min.Continuous			Unit			Kg/h	
	9	Full scale			Unit				
	10	Max.In Transients			Unit			Kg/h	
Press	11	Allow. with closed valve			Unit			Kg/h	
	12	Norm . Op. upstr. Press			Unit			3 barg	
	13	Max inlet pressure			Unit			6 barg	
	14	Dp. At max. flowrate			Unit			0.1 bar	
Temperature	15	Allow pressure drop			Unit			0.1 bar	
	16	Norm . upstr. Temp			Unit			27 -C	
	17	Max . upstr. Temp			Unit			100 -C	
Sp. Gr.	18	Gases vapours			Unit			Kg/m3	
	19	Liquids			Unit			1000 Kg/m3	
	20	Mol.weight			Unit			18 Kg/Kmol	
Visc.	21	Viscosity at op cond			Unit			mpa's	
	22	Solid in suspension			Unit				
Cv	23	Min/Norm/Max			Required			VTA VTA	
Body	24	Body type			Body material			Ball SS - 316	
	25	Size Body			Port			2" single	
	26	Design Pressure			Min. Bar a Max. Bar a			Barg	
	27	Design Temperature			Min. °C Max. °C			-C	
	28	Valve end con. & rating			Seat leakage class			Flange 300 # ANSI IV	
	29	Packing mat.			Lubricator			PTFE VTA	
	30	Flow direction			Unit				
Trim	31	Bonnet type			Unit			Standard	
	32	Plug type			Plug material			Ball SS - 316	
	33	Seat Material			Cage/Guide Material			SS - 316 NA	
Actuator	34	Characteristics			Unit			Full bore	
	35	Type / Direction of action			Unit			Cylinder&Piston	
	36	Fail Position			Unit			Close	
	37	Spring range			Unit			VTA	
Positioner	38	On-Off/Modulating			Single/Double Acting			On/Off Single Acting	
	39	Type			Unit			NA	
	40	Input signal			Out put signal			NA NA	
	41	Air supply			Action dir.			NA NA	
Solenoid Valve	42	Protection			Certificate			NA NA	
	43	Type			QTY			3-Way 1	
	44	Tag No.			Unit			UY-3202	
	45	Supply Voltage			Consumption			24VDC VTA (Ex-ib)	
Accessories	46	Protection			Certificate			IP 65 EEExib-IIC T3	
	47	Pressure gauge and filter			Unit			YES	
	48	Manual Control Wheel			Unit			M20	
	49	Cable Gland			Size/Qty			NA M20	
	50	Electrical Conection			Unit			M20	
	51	Tubing & Conection			Unit			SS Tube 1/4"	
	52	Switch			Protection Certificate			Open&Closed switches IP 65 EEExib-IIC T3	

1	0	12/18/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: _____
Owner Job No: _____ Sheet No: _____ of _____

General Data	1	Tag No.			UV-3402 (TK-343 Inlet)		
	2	P&ID	Line NO.	Piping Size	Piping Class	2"	1CL1
	3	Fluid		State	Hexane	LIQUID	
	4	Pressure rating		Piping material	150 #	L.T Carbon Steel	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C	0.82 Bara	86%
	6	Area Classification		Area	ZONE 1		
Flow Rate	7	Max.Continuous		Unit	Kg/h		
	8	Min.Continuous		Unit	Kg/h		
	9	Full scale					
	10	Max.In Transients		Unit	Kg/h		
Press	11	Allow. with closed valve		Unit	Kg/h		
	12	Norm . Op. upstr. Press		Unit	3.5	barg	
	13	Norm . Op. downstr. Press		Unit	0.1		
	14	Min. downstr. Press		Unit	0.05	bar	
Temperature	15	Allow pressure drop		Unit	bar		
	16	Norm . upstr. Temp		Unit	AMB	-C	
	17	Max . upstr. Temp		Unit	AMB	-C	
Sp. Gr.	18	Gases vapours		Unit	1.7	Kg/m3	
	19	Liquids		Unit	660	Kg/m3	
	20	Mol.weight		Unit	Kg/Kmol		
Visc.	21	Viscosity at op cond		Unit	mpa's		
	22	Solid in suspension					
Cv	23	Min/Norm/Max		Required	VTA	VTA	
Body	24	Body type		Body material	Ball	SS - 316	
	25	Size Body		Port	2"	single	
	26	Design Pressure		Min. Bar a	Max. Bar a	Barg	
	27	Design Temperature		Min. °C	Max. °C	-C	
	28	Valve end con. & rating		Seat leakage class	Flange 150 #	ANSI IV	
	29	Packing mat.		Lubricator	PTFE	VTA	
	30	Flow direction					
Trim	31	Bonnet type		Standard			
	32	Plug type		Plug material	Ball	SS - 316	
	33	Seat Material		Cage/Guide Material	SS - 316	NA	
Actuator	34	Characteristics		Full bore			
	35	Type / Direction of action		Cylinder&Piston			
	36	Fail Position		Close			
	37	Spring range		VTA			
Positioner	38	On-Off/Modulating		Single/Double Acting	On/Off	Single Acting	
	39	Type		NA			
	40	Input signal		Out put signal	NA	NA	
	41	Air supply		Action dir.	NA	NA	
Solenoid Valve	42	Protection		Certificate	NA	NA	
	43	Type		QTY	3-Way	1	
	44	Tag No.		UY-3402			
	45	Supply Voltage		Consumption	24VDC	VTA (Ex-ib)	
Accessories	46	Protection		Certificate	IP 65	EExib-IIC T3	
	47	Pressure gauge and filter		YES			
	48	Manual Control Wheel		NO			
	49	Cable Gland		Size/Qty	NA		
	50	Electrical Conection		M20			
	51	Tubing & Conection		SS Tube 1/4"			
	52	Switch		Protection	Certificate	Open&Closed switches	IP 65

1	0	12/18/2021	IFA	K.A	M.N	A.A.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet





شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: _____
Owner Job No: _____ Sheet No: _____ of _____

General Data	1	Tag No.			UV-3403 (Depres. TK-343)		
	2	P&ID	Line NO.	Piping Size	Piping Class	1/2"	1CL1
	3	Fluid			State	Hexane	Vapour
	4	Pressure rating			Piping material	150 #	L.T Carbon Steel
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C	0.82 Bara	86%
	6	Area Classification			Area	ZONE 1	
Flow Rate	7	Max.Continuous			Unit		Kg/h
	8	Min.Continuous			Unit		Kg/h
	9	Full scale					
	10	Max.In Transients			Unit		Kg/h
Press	11	Allow. with closed valve			Unit		Kg/h
	12	Norm . Op. upstr. Press			Unit	0.1	barg
	13	Max . Op. downstr. Press				5	
	14	Norm . Op. downstr. Press			Unit	0.05	bar
Temperature	15	Min. downstr. Press			Unit	0.02	bar
	16	Norm . upstr. Temp			Unit	AMB	-C
	17	Max . upstr. Temp			Unit	AMB	-C
Sp. Gr.	18	Gases vapours			Unit	1.7	Kg/m3
	19	Liquids			Unit	660	Kg/m3
	20	Mol.weight			Unit		Kg/Kmol
Visc.	21	Viscosity at op cond			Unit		mpa's
	22	Solid in suspension					
Cv	23	Min/Norm/Max		Required	VTA	VTA	
Body	24	Body type		Body material	Ball	SS - 316	
	25	Size Body		Port	1/2"	single	
	26	Design Pressure		Min. Bar a	Max. Bar a	Barg	
	27	Design Temperature		Min. °C	Max. °C	-C	
	28	Valve end con. & rating		Seat leakage class		Flange 150 #	ANSI IV
	29	Packing mat.		Lubricator		PTFE	VTA
	30	Flow direction					
Trim	31	Bonnet type			Standard		
	32	Plug type		Plug material	Ball	SS - 316	
	33	Seat Material		Cage/Guide Material	SS - 316	NA	
Actuator	34	Characteristics			Full bore		
	35	Type / Direction of action			Cylinder&Piston		
	36	Fail Position			Close		
	37	Spring range			VTA		
Positioner	38	On-Off/Modulating		Single/Double Acting	On/Off	Single Acting	
	39	Type			NA		
	40	Input signal		Out put signal	NA	NA	
	41	Air supply		Action dir.	NA	NA	
Solenoid Valve	42	Protection		Certificate	NA	NA	
	43	Type		QTY	3-Way	1	
	44	Tag No.			UY-3403		
	45	Supply Voltage		Consumption	24VDC	VTA (Ex-ib)	
Accessories	46	Protection		Certificate	IP 65	EExib-IIC T3	
	47	Pressure gauge and filter			YES		
	48	Manual Control Wheel			NO		
	49	Cable Gland		Size/Qty	NA		
	50	Electrical Conection			M20		
	51	Tubing & Conection			SS Tube 1/4"		
	52	Switch		Protection	Certificate	Open&Closed switches	IP 65

1	0	12/18/2021	IFA	K.A	M.N	A.A.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

		PROJECT: PP-PE PILOT PLANT						
		TITLE: ON/OFF Valve Data Sheet				شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی		
		Contractor Job No:		Doc. No: 900-DAS-A4-IN-0002				
		Owner Job No:		Sheet No: 86 of 167				
General Data	1	Item						UV3502
	2	Service						HP 351 TO R 411 or V611
	3	Location						HP 351
	4	P&ID NO.						312002_035
	5	Fluid						POLYMER
	6	State						SOLID
	7	Line NO.	Piping Size	Piping Class	0035	1 1/2"	1DS4	
	8	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-28)°C / 44°C	0.82 Bara	86%	
	9	Area Classification		Area	ZONE 1			
Flow Rate	10	Max. continuous	Unit	250	Kg/h			
	11	Min.Continuous	Unit	30	Kg/h			
	12	Full scale	Unit	300	Kg/h			
Pressure	13	Normal Pressure	Unit	18	barg			
	14	Normal DP	Unit	17.5	bar			
	15	Max Pressure	Unit	35	barg			
Temperature	16	Normal Temp.	Unit	70	°C			
	17	Max . Temp.	Unit	-60 +180	°C			
Sp. Gr.	18	Gases vapours	Unit		Kg/m3			
	19	Liquids	Unit		Kg/m3			
	20	Mol.weight	Unit		Kg/Kmol			
Visc.	21	Viscosity at op cond	Unit					
	22	Solid in suspension						
Cv	23	Min/Norm/Max	Required	VTA	VTA			
	24	Valve Type	Body material	120^ 3 WAY plug valve	ASTM A 182 gr.F 304			
Body	25	Valve Size	Port	1 1/2"				
	26	Design Pressure	Min. Bar a	Max. Bar a	Barg			
	27	Design Temperature	Min. °C	Max. °C	°C			
	28	Valve end con. & rating						
	29	Packing mat.	Lubricator	PTFE	VTA			
	30	Flow direction						
	31	Bonnet type						
	32	SEAT Leakage Class ANSI						
Trim	33	Type	Plug material	120^ 3 WAY plug valve	SS - 316			
	34	Seat Material	Cage/Guide Material	SS - 316	NA			
	35	Characteristics						
Actuator	36	Type	120^ 3 WAY plug valve Full bore					
	37	Acition	Cylinder&Piston Pneumatic					
	38	Air supply press.	DOUBLE ACTION					
	39	On Air Failure	7					
	40	On Power Failure	LAST POSITION					
	41	Notes	CLOSE					
Positioner	42	Type	NA					
	43	Input signal	Out put signal	NA	NA			
	44	Air supply	Action dir.	NA	NA			
	45	Protection	Certificate	NA	NA			
Solenoid Valve	46	Type	QTY	4-Way	1			
	47	Tag No.	UY-3502					
	48	Supply Voltage	Consumption	24VDC	VTA (Ex-ia)			
	49	Protection	Certificate	IP 65	EEExia-ILC T4			
Accessories	50	Pressure gauge and filter						
	51	Manual Control Wheel						
	52	Cable Gland	Size/Qty	NA				
	53	Electrical Conection						
	54	Tubing & Conection						
	55	Switch	Protection	Certificate	Open&Closed switches	IP 65	EEExia-ILC T4	



1	0	2021-12-18	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 87 of 167

General Data	1	Tag No.			UV-3503 A				
	2	P&ID	Line NO.	Piping Size	Piping Class	0035	3503	1"	1DS4(IA)
	3	Fluid			State		Propylene Gas		
	4	Pressure rating			Piping material		300# STAINLESS STEEL		
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max		(-20)°C / 50°C		0.82 Bara	86%
	6	Area Classification			ZONE 1				
Flow Rate	7	Max.Continuous		Unit	23		Kg/h		
	8	Min.Continuous		Unit	2.8		Kg/h		
	9	Full scale		28					
	10	Max.In Transients		Unit	Kg/h				
Press	11	Allow. with closed valve		Unit	Kg/h				
	12	Norm . Op. upstr. Press		Unit	23		barg		
	13	Max inlet pressure		30					
	14	Dp. At max. flowrate		Unit	5		bar		
Temperature	15	Allow pressure drop		Unit	0.1		bar		
	16	Norm . upstr. Temp		Unit	75		-C		
	17	Max . upstr. Temp		Unit	150		-C		
Sp. Gr.	18	Gases vapours		Unit	Kg/m3				
	19	Liquids		Unit	Kg/m3				
	20	Mol.weight		Unit	Kg/Kmol				
Visc.	21	Viscosity at op cond		Unit	mpa's				
	22	Solid in suspension							
Cv	23	Min/Norm/Max		Required	VTA		VTA		
Body	24	Body type		Body material		Ball		SS - 316	
	25	Size Body		Port		1"		single	
	26	Design Pressure		Min. Bar a	Max. Bar a			Barg	
	27	Design Temperature		Min. °C	Max. °C			-C	
	28	Valve end con. & rating		Seat leakage class		Flange 300 #		ANSI IV	
	29	Packing mat.		Lubricator		PTFE		VTA	
	30	Flow direction							
Trim	31	Bonnet type		Standard					
	32	Plug type		Plug material		Ball		SS - 316	
	33	Seat Material		Cage/Guide Material		SS - 316		NA	
Actuator	34	Characteristics		Full bore					
	35	Type / Direction of action		Cylinder&Piston					
	36	Fail Position		Close					
	37	Spring range		VTA					
Positioner	38	On-Off/Modulating		Single/Double Acting		On/Off		Single Acting	
	39	Type		NA					
	40	Input signal		Out put signal		NA		NA	
	41	Air supply		Action dir.		NA		NA	
Solenoid Valve	42	Protection		Certificate		NA		NA	
	43	Type		QTY		3-Way		1	
	44	Tag No.		UY-3503 A					
	45	Supply Voltage		Consumption		24VDC		VTA (Ex-ib)	
Accessories	46	Protection		Certificate		IP 65		EExib-IIC T3	
	47	Pressure gauge and filter		YES					
	48	Manual Control Wheel		M20					
	49	Cable Gland		Size/Qty		NA			
	50	Electrical Conection		M20					
	51	Tubing & Conection		SS Tube 1/4"					
	52	Switch		Protection	Certificate	Open&Closed switches		IP 65	EExib-IIC T3

1	0	12/18/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 88 of 167

General Data	1	Tag No.			UV-3503 B				
	2	P&ID	Line NO.	Piping Size	Piping Class	0035	3504	1"	1DS4(IA)
	3	Fluid			State		Propylene Gas		
	4	Pressure rating			Piping material		300# STAINLESS STEEL		
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max		(-20)°C / 50°C		0.82 Bara	86%
	6	Area Classification			Area		ZONE 1		
Flow Rate	7	Max.Continuous			Unit		23	Kg/h	
	8	Min.Continuous			Unit		2.8	Kg/h	
	9	Full scale			Unit		28		
	10	Max.In Transients			Unit			Kg/h	
Press	11	Allow. with closed valve			Unit			Kg/h	
	12	Norm . Op. upstr. Press			Unit		23	barg	
	13	Max inlet pressure			Unit		30		
	14	Dp. At max. flowrate			Unit		5	bar	
Temperature	15	Allow pressure drop			Unit		0.1	bar	
	16	Norm . upstr. Temp			Unit		75	-C	
	17	Max . upstr. Temp			Unit		150	-C	
Sp. Gr.	18	Gases vapours			Unit			Kg/m3	
	19	Liquids			Unit			Kg/m3	
	20	Mol.weight			Unit			Kg/Kmol	
Visc.	21	Viscosity at op cond			Unit			mpa's	
	22	Solid in suspension			Unit				
Cv	23	Min/Norm/Max			Required		VTA	VTA	
Body	24	Body type			Body material		Ball	SS - 316	
	25	Size Body			Port		1"	single	
	26	Design Pressure			Min. Bar a	Max. Bar a		Barg	
	27	Design Temperature			Min. °C	Max. °C		-C	
	28	Valve end con. & rating			Seat leakage class		Flange 300 #	ANSI IV	
	29	Packing mat.			Lubricator		PTFE	VTA	
	30	Flow direction			Unit				
Trim	31	Bonnet type			Unit		Standard		
	32	Plug type			Plug material		Ball	SS - 316	
	33	Seat Material			Cage/Guide Material		SS - 316	NA	
Actuator	34	Characteristics			Unit		Full bore		
	35	Type / Direction of action			Unit		Cylinder&Piston		
	36	Fail Position			Unit		Close		
	37	Spring range			Unit		VTA		
Positioner	38	On-Off/Modulating			Single/Double Acting		On/Off	Single Acting	
	39	Type			Unit		NA		
	40	Input signal			Out put signal		NA	NA	
	41	Air supply			Action dir.		NA	NA	
Solenoid Valve	42	Protection			Certificate		NA	NA	
	43	Type			QTY		3-Way	1	
	44	Tag No.			Unit		UY-3503B		
	45	Supply Voltage			Consumption		24VDC	VTA (Ex-ib)	
Accessories	46	Protection			Certificate		IP 65	EExib-IIC T3	
	47	Pressure gauge and filter			Unit		YES		
	48	Manual Control Wheel			Unit		M20		
	49	Cable Gland			Size/Qty		NA		
	50	Electrical Conection			Unit		M20		
	51	Tubing & Conection			Unit		SS Tube 1/4"		
	52	Switch			Protection	Certificate	Open&Closed switches	IP 65	EExib-IIC T3

1	0	12/18/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 89 of 167

General Data	1	Tag No.			UV-3503 C				
	2	P&ID	Line NO.	Piping Size	Piping Class	0035	3504	1"	1DS4(IA)
	3	Fluid			State		Propylene Gas		
	4	Pressure rating			Piping material		300# STAINLESS STEEL		
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max		(-20)°C / 50°C		0.82 Bara	86%
	6	Area Classification			Area		ZONE 1		
Flow Rate	7	Max.Continuous			Unit		23	Kg/h	
	8	Min.Continuous			Unit		2.8	Kg/h	
	9	Full scale			Unit		28		
	10	Max.In Transients			Unit			Kg/h	
Press	11	Allow. with closed valve			Unit			Kg/h	
	12	Norm . Op. upstr. Press			Unit		23	barg	
	13	Max inlet pressure			Unit		30		
	14	Dp. At max. flowrate			Unit		5	bar	
Temperature	15	Allow pressure drop			Unit		0.1	bar	
	16	Norm . upstr. Temp			Unit		75	-C	
	17	Max . upstr. Temp			Unit		150	-C	
Sp. Gr.	18	Gases vapours			Unit			Kg/m3	
	19	Liquids			Unit			Kg/m3	
	20	Mol.weight			Unit			Kg/Kmol	
Visc.	21	Viscosity at op cond			Unit			mpa's	
	22	Solid in suspension			Unit				
Cv	23	Min/Norm/Max			Required		VTA	VTA	
Body	24	Body type			Body material		Ball	SS - 316	
	25	Size Body			Port		1"	single	
	26	Design Pressure			Min. Bar a	Max. Bar a		Barg	
	27	Design Temperature			Min. °C	Max. °C		-C	
	28	Valve end con. & rating			Seat leakage class		Flange 300 #	ANSI IV	
	29	Packing mat.			Lubricator		PTFE	VTA	
	30	Flow direction			Unit				
Trim	31	Bonnet type			Unit		Standard		
	32	Plug type			Plug material		Ball	SS - 316	
	33	Seat Material			Cage/Guide Material		SS - 316	NA	
Actuator	34	Characteristics			Unit		Full bore		
	35	Type / Direction of action			Unit		Cylinder&Piston		
	36	Fail Position			Unit		Close		
	37	Spring range			Unit		VTA		
Positioner	38	On-Off/Modulating			Single/Double Acting	Unit	On/Off	Single Acting	
	39	Type			Unit		NA		
	40	Input signal			Out put signal		NA	NA	
	41	Air supply			Action dir.		NA	NA	
Solenoid Valve	42	Protection			Certificate		NA	NA	
	43	Type			QTY		3-Way	1	
	44	Tag No.			Unit		UY-3503C		
	45	Supply Voltage			Consumption		24VDC	VTA (Ex-ib)	
Accessories	46	Protection			Certificate		IP 65	EExib-IIC T3	
	47	Pressure gauge and filter			Unit		YES		
	48	Manual Control Wheel			Unit		M20		
	49	Cable Gland			Size/Qty	Unit	NA		
	50	Electrical Conection			Unit		M20		
	51	Tubing & Conection			Unit		SS Tube 1/4"		
	52	Switch			Protection	Certificate	Open&Closed switches	IP 65	EExib-IIC T3

1	0	12/18/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 90 of 167

General Data	1	Tag No.			UV-3504				
	2	P&ID	Line NO.	Piping Size	Piping Class	0035	0102	1/2"	1FS4
	3	Fluid			State		Propylene		
	4	Pressure rating			Piping material		600# STAINLESS STEEL		
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max		(-20)°C / 50°C		0.82 Bara	86%
	6	Area Classification			ZONE 1				
Flow Rate	7	Max.Continuous		Unit	85		Kg/h		
	8	Min.Continuous		Unit	8.5		Kg/h		
	9	Full scale		102					
	10	Max.In Transients		Unit	Kg/h				
Press	11	Allow. with closed valve		Unit	Kg/h				
	12	Norm . Op. upstr. Press		Unit	55		barg		
	13	Max inlet pressure		65					
	14	Dp. At max. flowrate		Unit	32		bar		
Temperature	15	Allow pressure drop		Unit	0.1		bar		
	16	Norm . upstr. Temp		Unit	AMB		-C		
	17	Max . upstr. Temp		Unit	-60 +180		-C		
Sp. Gr.	18	Gases vapours		Unit	Kg/m3				
	19	Liquids		Unit	Kg/m3				
	20	Mol.weight		Unit	Kg/Kmol				
Visc.	21	Viscosity at op cond		Unit	mpa's				
	22	Solid in suspension							
Cv	23	Min/Norm/Max		Required	VTA		VTA		
Body	24	Body type		Body material		Ball		SS - 316	
	25	Size Body		Port		1/2"		single	
	26	Design Pressure		Min. Bar a	Max. Bar a			Barg	
	27	Design Temperature		Min. °C	Max. °C			-C	
	28	Valve end con. & rating		Seat leakage class		Flange 600 #		ANSI IV	
	29	Packing mat.		Lubricator		PTFE		VTA	
	30	Flow direction							
Trim	31	Bonnet type		Standard					
	32	Plug type		Plug material		Ball		SS - 316	
	33	Seat Material		Cage/Guide Material		SS - 316		NA	
Actuator	34	Characteristics		Full bore					
	35	Type / Direction of action		Cylinder&Piston					
	36	Fail Position		Close					
	37	Spring range		VTA					
Positioner	38	On-Off/Modulating		Single/Double Acting		On/Off		Single Acting	
	39	Type		NA					
	40	Input signal		Out put signal		NA		NA	
	41	Air supply		Action dir.		NA		NA	
Solenoid Valve	42	Protection		Certificate		NA		NA	
	43	Type		QTY		3-Way		1	
	44	Tag No.		UY-3504					
	45	Supply Voltage		Consumption		24VDC		VTA (Ex-ib)	
Accessories	46	Protection		Certificate		IP 65		EExib-IIC T3	
	47	Pressure gauge and filter		YES					
	48	Manual Control Wheel		M20					
	49	Cable Gland		Size/Qty		NA			
	50	Electrical Conection		M20					
	51	Tubing & Conection		SS Tube 1/4"					
	52	Switch		Protection	Certificate	Open&Closed switches		IP 65	EExib-IIC T3

1	0	12/18/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: Doc. No: 900-DAS-A4-IN-0002

Owner Job No: Sheet No: 91 of 167

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 92 of 167

General Data	1	Tag No.			UV-3602				
	2	P&ID	Line NO.	Piping Size	Piping Class	0036	3602	3"	2DC4
	3	Fluid			State		Cooling Water Return		
	4	Pressure rating			Piping material		300# CARBON STEEL		
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max		(-20)°C / 50°C	0.82 Bara		86%
	6	Area Classification			Area		ZONE 1		
Flow Rate	7	Max.Continuous			Unit	19166		Kg/h	
	8	Min.Continuous			Unit	2300		Kg/h	
	9	Full scale					23000		
	10	Max.In Transients			Unit			Kg/h	
Press	11	Allow. with closed valve			Unit	0		Kg/h	
	12	Norm . Op. upstr. Press			Unit	4		barg	
	13	Max inlet pressure					35		
	14	Dp. At max. flowrate			Unit	0.1		bar	
Temperature	15	Allow pressure drop			Unit	0.1		bar	
	16	Norm . upstr. Temp			Unit	30		-C	
	17	Max . upstr. Temp			Unit	+100		-C	
Sp. Gr.	18	Gases vapours			Unit			Kg/m3	
	19	Liquids			Unit			Kg/m3	
	20	Mol.weight			Unit			Kg/Kmol	
Visc.	21	Viscosity at op cond			Unit			mpa's	
	22	Solid in suspension							
Cv	23	Min/Norm/Max		Required	VTA		VTA		
Body	24	Body type		Body material		Ball		CARBON STEEL	
	25	Size Body		Port		3"		single	
	26	Design Pressure		Min. Bar a	Max. Bar a			Barg	
	27	Design Temperature		Min. °C	Max. °C			-C	
	28	Valve end con. & rating		Seat leakage class		Flange 300 #		ANSI IV	
	29	Packing mat.		Lubricator		PTFE		VTA	
	30	Flow direction							
Trim	31	Bonnet type					Standard		
	32	Plug type		Plug material		Ball		SS - 316	
	33	Seat Material		Cage/Guide Material		SS - 316		NA	
Actuator	34	Characteristics					Full bore		
	35	Type / Direction of action					Cylinder&Piston		
	36	Fail Position					Close		
	37	Spring range					VTA		
Positioner	38	On-Off/Modulating		Single/Double Acting		On/Off		Single Acting	
	39	Type					NA		
	40	Input signal		Out put signal		NA		NA	
	41	Air supply		Action dir.		NA		NA	
Solenoid Valve	42	Protection		Certificate		NA		NA	
	43	Type		QTY		3-Way		1	
	44	Tag No.					UY-3602		
	45	Supply Voltage		Consumption		24VDC		VTA (Ex-ib)	
Accessories	46	Protection		Certificate		IP 65		EExib-IIC T3	
	47	Pressure gauge and filter					YES		
	48	Manual Control Wheel					M20		
	49	Cable Gland		Size/Qty		NA			
	50	Electrical Conection					M20		
	51	Tubing & Conection					SS Tube 1/4"		
	52	Switch		Protection	Certificate	Open&Closed switches	IP 65	EExib-IIC T3	

1	0	12/18/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 93 of 167

General Data	1	Tag No.			UV-3603				
	2	P&ID	Line NO.	Piping Size	Piping Class	0036	3602	1"	2DC4
	3	Fluid			State				
	4	Pressure rating			Piping material		300#		
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max		(-20)°C / 50°C		0.82 Bara	
	6	Area Classification			Area		ZONE 1		
Flow Rate	7	Max.Continuous			Unit		100		Kg/h
	8	Min.Continuous			Unit		10		Kg/h
	9	Full scale			Unit		120		
	10	Max.In Transients			Unit				Kg/h
Press	11	Allow. with closed valve			Unit		0		Kg/h
	12	Norm . Op. upstr. Press			Unit		8		barg
	13	Max inlet pressure			Unit		35		
	14	Dp. At max. flowrate			Unit		0.2		bar
Temperature	15	Allow pressure drop			Unit		0.2		bar
	16	Norm . upstr. Temp			Unit		+140		-C
	17	Max . upstr. Temp			Unit		+250		-C
Sp. Gr.	18	Gases vapours			Unit				Kg/m3
	19	Liquids			Unit				Kg/m3
	20	Mol.weight			Unit				Kg/Kmol
Visc.	21	Viscosity at op cond			Unit				mpa's
	22	Solid in suspension			Unit				
Cv	23	Min/Norm/Max			Required		VTA		VTA
	24	Body type			Body material		Ball		CARBON STEEL
Body	25	Size Body			Port		1"		single
	26	Design Pressure			Min. Bar a		Max. Bar a		Barg
	27	Design Temperature			Min. °C		Max. °C		-C
	28	Valve end con. & rating			Seat leakage class		Flange 300 #		ANSI IV
	29	Packing mat.			Lubricator		PTFE		VTA
	30	Flow direction			Unit				
	31	Bonnet type			Unit		Standard		
Trim	32	Plug type			Plug material		Ball		SS - 316
	33	Seat Material			Cage/Guide Material		SS - 316		NA
	34	Characteristics			Unit		Full bore		
Actuator	35	Type / Direction of action			Unit		Cylinder&Piston		
	36	Fail Position			Unit		Close		
	37	Spring range			Unit		VTA		
	38	On-Off/Modulating			Single/Double Acting		On/Off		Single Acting
Positioner	39	Type			Unit		NA		
	40	Input signal			Out put signal		NA		NA
	41	Air supply			Action dir.		NA		NA
	42	Protection			Certificate		NA		NA
Solenoid Valve	43	Type			QTY		3-Way		1
	44	Tag No.			Unit		UY-3603		
	45	Supply Voltage			Consumption		24VDC		VTA (Ex-ib)
Accessories	46	Protection			Certificate		IP 65		EExib-IIC T3
	47	Pressure gauge and filter			Unit		YES		
	48	Manual Control Wheel			Unit		M20		
	49	Cable Gland			Size/Qty		NA		
	50	Electrical Conection			Unit		M20		
	51	Tubing & Conection			Unit		SS Tube 1/4"		
	52	Switch			Protection		Certificate		Open&Closed switches
1	0	12/18/2021		IFA		K.A	M.N	AA.SH	
No.	Rev	Date		Status		Prepared	Checked	Approved	

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: _____
Owner Job No: _____ Sheet No: _____ of _____

General Data	1	Tag No.			UV-5411 (NIL To SI542)				
	2	P&ID	Line NO.	Piping Size	Piping Class	0054	5401	1/2"	1CS2
	3	Fluid			State	Nitrogen		Gas	
	4	Pressure rating			Piping material	150#		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara		86%
	6	Area Classification			ZONE 1				
Flow Rate	7	Max.Continuous		Unit	Kg/h				
	8	Min.Continuous		Unit	Kg/h				
	9	Max.In Transients		Unit	Kg/h				
	10	Allow. with closed valve		Unit	Kg/h				
Press	11	Norm . Op. upstr. Press		Unit	3		barg		
	12	Max . Op. upstr. Press		Unit	6		bar		
	13	Norm. downstr. Press		Unit	0.1		bar		
Temperature	14	Norm . upstr. Temp		Unit	AMB		°C		
	15	Max . upstr. Temp		Unit	AMB		°C		
Sp. Gr.	16	Gases vapours		Unit	1.2		Kg/m3		
	17	Liquids		Unit	Kg/m3				
	18	Mol.weight		Unit	Kg/Kmol				
Visc.	19	Op. visc. (when>5mpa's)							
	20	Solid in suspension							
Cv	21	Min/Norm/Max		Required	VTA		VTA		
	22	Body type		Body material	Full Bore Ball valve		SS - 316		
Body	23	Size Body		Port	1/2"		single		
	24	Design Pressure		Min. Bar a Max. Bar a	Barg				
	25	Design Temperature		Min. °C Max. °C	°C				
	26	Valve end con. & rating		Seat leakage class	Flange 150#		ANSI IV		
	27	Packing mat.		Lubricator	PTFE		VTA		
	28	Flow direction							
	29	Bonnet type			Standard				
	Trim	30	Plug type		Plug material	Ball		SS - 316	
31		Seat Material		Cage/Guide Material	SS - 316		NA		
32		Characteristics			Full Bore Ball valve				
Actuator	33	Type / Direction of action			Cylinder&Piston				
	34	Fail Position			Close				
	35	Spring range			VTA				
	36	On-Off/Modulating		Single/Double Acting	On/Off		Single Acting		
Positioner	37	Type			NA				
	38	Input signal		Out put signal	NA		NA		
	39	Air supply		Action dir.	NA		NA		
	40	Protection		Certificate	NA		NA		
Solenoid Valve	41	Type		QTY	3-Way		1		
	42	Tag No.			UY-5411				
	43	Supply Voltage		Consumption	24VDC		VTA (Ex-ib)		
	44	Protection		Certificate	IP 65		EEExib-IIB T3		
Accessories	45	Pressure gauge and filter			yes				
	46	Manual Control Wheel			NA				
	47	Cable Gland		Size/Qty	NA				
	48	Electrical Conection			M20				
	49	Tubing & Conection			SS Tube 1/4"				
	50	Switch		Protection	Certificate	CLOSE & OPEN SWITCH	IP 65	EEExib-IIB T3	

1	0	12/18/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: _____
Owner Job No: _____ Sheet No: _____ of _____

General Data	1	Tag No.			UV-5412 (NIL To SI543)				
	2	P&ID	Line NO.	Piping Size	Piping Class	0054	5401	1/2"	1CS2
	3	Fluid			State	Nitrogen		Gas	
	4	Pressure rating			Piping material	150#		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara		86%
	6	Area Classification			ZONE 1				
Flow Rate	7	Max.Continuous		Unit	Kg/h				
	8	Min.Continuous		Unit	Kg/h				
	9	Max.In Transients		Unit	Kg/h				
	10	Allow. with closed valve		Unit	Kg/h				
Press	11	Norm . Op. upstr. Press		Unit	3		barg		
	12	Max . Op. upstr. Press		Unit	6		bar		
	13	Norm. downstr. Press		Unit	0.1		bar		
Temperature	14	Norm . upstr. Temp		Unit	AMB		°C		
	15	Max . upstr. Temp		Unit	AMB		°C		
Sp. Gr.	16	Gases vapours		Unit	1.2		Kg/m3		
	17	Liquids		Unit	Kg/m3				
	18	Mol.weight		Unit	Kg/Kmol				
Visc.	19	Op. visc. (when>5mpa's)							
	20	Solid in suspension							
Cv	21	Min/Norm/Max		Required	VTA		VTA		
	22	Body type		Body material	Full Bore Ball valve		SS - 316		
Body	23	Size Body		Port	1/2"		single		
	24	Design Pressure		Min. Bar a Max. Bar a	Barg				
	25	Design Temperature		Min. °C Max. °C	°C				
	26	Valve end con. & rating		Seat leakage class	Flange 150#		ANSI IV		
	27	Packing mat.		Lubricator	PTFE		VTA		
	28	Flow direction							
	29	Bonnet type			Standard				
	Trim	30	Plug type		Plug material	Ball		SS - 316	
31		Seat Material		Cage/Guide Material	SS - 316		NA		
32		Characteristics			Full Bore Ball valve				
Actuator	33	Type / Direction of action			Cylinder&Piston				
	34	Fail Position			Close				
	35	Spring range			VTA				
	36	On-Off/Modulating		Single/Double Acting	On/Off		Single Acting		
Positioner	37	Type			NA				
	38	Input signal		Out put signal	NA		NA		
	39	Air supply		Action dir.	NA		NA		
	40	Protection		Certificate	NA		NA		
Solenoid Valve	41	Type		QTY	3-Way		1		
	42	Tag No.			UY-5412				
	43	Supply Voltage		Consumption	24VDC		VTA (Ex-ib)		
	44	Protection		Certificate	IP 65		EEExib-IIB T3		
Accessories	45	Pressure gauge and filter			yes				
	46	Manual Control Wheel			NA				
	47	Cable Gland		Size/Qty	NA				
	48	Electrical Conection			M20				
	49	Tubing & Conection			SS Tube 1/4"				
	50	Switch		Protection	Certificate	CLOSE & OPEN SWITCH	IP 65	EEExib-IIB T3	
1	0	12/18/2021		IFA	K.A	M.N	AA.SH		
No.	Rev	Date		Status	Prepared	Checked	Approved		

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 131 of 167

General Data	1	Tag No.			UV-6101 (P7) (3" #150 RF)				
	2	P&ID	Line NO.	Piping Size	Piping Class	0061	6102	3"	1CS1
	3	Fluid			State	Process			
	4	Pressure rating			Piping material	150#		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara		86%
	6	Area Classification			Area	ZONE 1			
Flow Rate	7	Max.Continuous			Unit	458		Kg/h	
	8	Min.Continuous			Unit	55		Kg/h	
	9	Full scale			550				
	10	Max.In Transients			Unit	Kg/h			
Press	11	Allow. with closed valve			Unit	0		Kg/h	
	12	Norm . Op. upstr. Press			Unit	0.5		barg	
	13	Max inlet pressure			8				
	14	Dp. At max. flowrate			Unit	0.4		bar	
Temperature	15	Allow pressure drop			Unit	0.1		bar	
	16	Norm . upstr. Temp			Unit	90		-C	
	17	Max . upstr. Temp			Unit	+180		-C	
Sp. Gr.	18	Gases vapours			Unit	Kg/m3			
	19	Liquids			Unit	Kg/m3			
	20	Mol.weight			Unit	Kg/Kmol			
Visc.	21	Viscosity at op cond			Unit	mpa's			
	22	Solid in suspension							
Cv	23	Min/Norm/Max		Required	VTA		VTA		
Body	24	Body type		Body material	Ball		SS - 316		
	25	Size Body		Port	3"		single		
	26	Design Pressure		Min. Bar a	Max. Bar a				
	27	Design Temperature		Min. °C	Max. °C				
	28	Valve end con. & rating		Seat leakage class		Flange 150 #		ANSI IV	
	29	Packing mat.		Lubricator		PTFE		VTA	
	30	Flow direction							
Trim	31	Bonnet type			Standard				
	32	Plug type		Plug material	Ball		SS - 316		
	33	Seat Material		Cage/Guide Material	SS - 316		NA		
Actuator	34	Characteristics			Full bore				
	35	Type / Direction of action			Cylinder&Piston				
	36	Fail Position			Close				
	37	Spring range			VTA				
Positioner	38	On-Off/Modulating		Single/Double Acting	On/Off		Single Acting		
	39	Type			NA				
	40	Input signal		Out put signal	NA		NA		
	41	Air supply		Action dir.	NA		NA		
Solenoid Valve	42	Protection		Certificate	NA		NA		
	43	Type		QTY	4-Way		1		
	44	Tag No.			UY-6101				
	45	Supply Voltage		Consumption	24VDC		VTA (Ex-ib)		
Accessories	46	Protection		Certificate	IP 65		EExib-IIC T3		
	47	Pressure gauge and filter			YES				
	48	Manual Control Wheel			M20				
	49	Cable Gland		Size/Qty	NA				
	50	Electrical Conection			CLOSE & OPEN SWITCH				
	51	Tubing & Conection			SS Tube 1/4"				
	52	Switch		Protection	Certificate	Open&Closed switches		IP 65	EExib-IIC T3

1	0	12/20/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 132 of 167

General Data	1	Tag No.			UV-6102				
	2	P&ID	Line NO.	Piping Size	Piping Class	0061	6101	1"	4CC2
	3	Fluid			State			Industrial water	
	4	Pressure rating			Piping material			150# CARBON STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max		(-20)°C / 50°C	0.82 Bara		86%
	6	Area Classification			Area			ZONE 1	
Flow Rate	7	Max.Continuous			Unit			2500 Kg/h	
	8	Min.Continuous			Unit			300 Kg/h	
	9	Full scale			Unit			3000	
	10	Max.In Transients			Unit			Kg/h	
Press	11	Allow. with closed valve			Unit			0 Kg/h	
	12	Norm . Op. upstr. Press			Unit			4 barg	
	13	Max inlet pressure			Unit			10 bar	
	14	Dp. At max. flowrate			Unit			3.5 bar	
Temperature	15	Allow pressure drop			Unit			bar	
	16	Norm . upstr. Temp			Unit			AMB -C	
	17	Max . upstr. Temp			Unit			+120 -C	
Sp. Gr.	18	Gases vapours			Unit			Kg/m3	
	19	Liquids			Unit			Kg/m3	
	20	Mol.weight			Unit			Kg/Kmol	
Visc.	21	Viscosity at op cond			Unit			mpa's	
	22	Solid in suspension			Unit				
Cv	23	Min/Norm/Max			Required			VTA VTA	
	24	Body type			Body material			Ball CARBON STEEL	
Body	25	Size Body			Port			1" single	
	26	Design Pressure			Min. Bar a Max. Bar a			Barg	
	27	Design Temperature			Min. °C Max. °C			-C	
	28	Valve end con. & rating			Seat leakage class			Flange 150 # ANSI IV	
	29	Packing mat.			Lubricator			PTFE VTA	
	30	Flow direction			Unit				
	31	Bonnet type			Unit			Standard	
Trim	32	Plug type			Plug material			Ball SS - 316	
	33	Seat Material			Cage/Guide Material			SS - 316 NA	
	34	Characteristics			Unit			Full bore	
Actuator	35	Type / Direction of action			Unit			Cylinder&Piston	
	36	Fail Position			Unit			Close	
	37	Spring range			Unit			VTA	
	38	On-Off/Modulating			Single/Double Acting			On/Off Single Acting	
Positioner	39	Type			Unit			NA	
	40	Input signal			Out put signal			NA NA	
	41	Air supply			Action dir.			NA NA	
	42	Protection			Certificate			NA NA	
Solenoid Valve	43	Type			QTY			3-Way 1	
	44	Tag No.			Unit			UY-6102	
	45	Supply Voltage			Consumption			24VDC VTA (Ex-ib)	
Accessories	46	Protection			Certificate			IP 65 EEExib-IIC T3	
	47	Pressure gauge and filter			Unit			YES	
	48	Manual Control Wheel			Unit			M20	
	49	Cable Gland			Size/Qty			NA	
	50	Electrical Connection			Unit			CLOSE & OPEN SWITCH	
	51	Tubing & Connection			Unit			SS Tube 1/4"	
	52	Switch			Protection Certificate			Open&Closed switches IP 65 EEExib-IIC T3	
	53	Switch			Protection Certificate			Open&Closed switches IP 65 EEExib-IIC T3	

1	0	12/20/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet




شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 133 of 167

General Data	1	Tag No.			UV-6103				
	2	P&ID	Line NO.	Piping Size	Piping Class	0061	6101	1"	4CC2
	3	Fluid			State	Chemical sewer water			
	4	Pressure rating			Piping material	150# CARBON STEEL			
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C	0.82 Bara		86%	
	6	Area Classification			Area	ZONE 1			
Flow Rate	7	Max.Continuous			Unit	3500		Kg/h	
	8	Min.Continuous			Unit	350		Kg/h	
	9	Full scale			4200				
	10	Max.In Transients			Unit	Kg/h			
Press	11	Allow. with closed valve			Unit	0		Kg/h	
	12	Norm . Op. upstr. Press			Unit	4		barg	
	13	Max inlet pressure			10				
	14	Dp. At max. flowrate			Unit	4		bar	
Temperature	15	Allow pressure drop			Unit	0.1		bar	
	16	Norm . upstr. Temp			Unit	+30		-C	
	17	Max . upstr. Temp			Unit	+120		-C	
Sp. Gr.	18	Gases vapours			Unit	Kg/m3			
	19	Liquids			Unit	Kg/m3			
	20	Mol.weight			Unit	Kg/Kmol			
Visc.	21	Viscosity at op cond			Unit	mpa's			
	22	Solid in suspension							
Cv	23	Min/Norm/Max		Required	VTA		VTA		
Body	24	Body type		Body material	Ball		CARBON STEEL		
	25	Size Body		Port	1"		single		
	26	Design Pressure		Min. Bar a	Max. Bar a			Barg	
	27	Design Temperature		Min. °C	Max. °C			-C	
	28	Valve end con. & rating		Seat leakage class		Flange 150 #		ANSI IV	
	29	Packing mat.		Lubricator		PTFE		VTA	
	30	Flow direction							
Trim	31	Bonnet type			Standard				
	32	Plug type		Plug material	Ball		SS - 316		
	33	Seat Material		Cage/Guide Material	SS - 316		NA		
Actuator	34	Characteristics			Full bore				
	35	Type / Direction of action			Cylinder&Piston				
	36	Fail Position			Close				
	37	Spring range			VTA				
Positioner	38	On-Off/Modulating		Single/Double Acting	On/Off		Single Acting		
	39	Type			NA				
	40	Input signal		Out put signal	NA		NA		
	41	Air supply		Action dir.	NA		NA		
Solenoid Valve	42	Protection		Certificate	NA		NA		
	43	Type		QTY	3-Way		1		
	44	Tag No.			UY-6151				
	45	Supply Voltage		Consumption	24VDC		VTA (Ex-ib)		
Accessories	46	Protection		Certificate	IP 65		EExib-IIC T3		
	47	Pressure gauge and filter			YES				
	48	Manual Control Wheel			M20				
	49	Cable Gland		Size/Qty	NA				
	50	Electrical Conection			CLOSE & OPEN SWITCH				
	51	Tubing & Conection			SS Tube 1/4"				
	52	Switch		Protection	Certificate	Open&Closed switches	IP 65	EExib-IIC T3	

1	0	12/20/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

		PROJECT: PP-PE PILOT PLANT					 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		TITLE: ON/OFF Valve Data Sheet						
		Contractor Job No:			Doc. No: 900-DAS-A4-IN-0002			
		Owner Job No:			Sheet No: 135 of 167			
General Data	1	Tag No.			UV-6201 (P5) (3" #150 PAD RF)			
	2	P&ID	Line NO.	Piping Size	Piping Class	0062	6201	3" 1CS4
	3	Fluid			State		LLDPE	
	4	Pressure rating			Piping material		150 # STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max		(-20)°C / 50°C	0.82 Bara	86%
	6	Area Classification			Area		ZONE 1	
Flow Rate	7	Max.Continuous		Unit	458		Kg/h	
	8	Min.Continuous		Unit	55		Kg/h	
	9	Max.In Transients		Unit	550		Kg/h	
	10	Allow. with closed valve		Unit			Kg/h	
Press	11	Norm . Op. upstr. Press		Unit	0.3		barg	
	12	Dp. At max. flowrate		Unit	0.1		bar	
	13	Max. Dp with closed valve		Unit	1		bar	
Temperature	14	Norm . upstr. Temp		Unit	+90		°C	
	15	Max . upstr. Temp		Unit	+180		°C	
Sp. Gr.	16	Gases vapours		Unit			Kg/m3	
	17	Liquids		Unit			Kg/m3	
	18	Mol.weight		Unit			Kg/Kmol	
Visc.	19	Op. visc. (when>5mpa's)						
	20	Solid in suspension						
Cv	21	Min/Norm/Max		Required	VTA		VTA	
Body	22	Body type		Body material		Ball	SS-316	
	23	Size Body		Port		3"	Single	
	24	Design Pressure		Min. Bar a	Max. Bar a		Barg	
	25	Design Temperature		Min. °C	Max. °C		°C	
	26	Valve end con. & rating		Seat leakage class		Flange 150 #	ANSI IV	
	27	Packing mat.		Lubricator		PTFE	VTA	
	28	Flow direction						
	29	Bonnet type		Standard				
Trim	30	Plug type		Plug material		Ball	SS - 316	
	31	Seat Material		Cage/Guide Material		SS - 316	NA	
	32	Characteristics		Full bore				
Actuator	33	Type / Direction of action		Cylinder&Piston				
	34	Fail Position		Close				
	35	Spring range		NA				
	36	On-Off/Modulating		Single/Double Acting	On/Off	Double Acting		
Positioner	37	Type		NA				
	38	Input signal		Out put signal		NA	NA	
	39	Air supply		Action dir.		NA	NA	
	40	Protection		Certificate		NA	NA	
Solenoid Valve	41	Type		QTY		4-Way	1	
	42	Tag No.		UY-6201				
	43	Supply Voltage		Consumption		24VDC	VTA(Ex-ib)	
	44	Protection		Certificate		IP 65	EExib-IIB T3	
Accessories	45	Pressure gauge and filter		YES				
	46	Manual Control Wheel		NA				
	47	Cable Gland		Size/Qty		NA		
	48	Electrical Conection		M20				
	49	Tubing & Conection		SS Tube 1/4"				
	50	Switch	Protection	Certificate	CLOSE & OPEN SWITCH	IP 65	EExib-IIB T3	
1	0	12/20/2021	IFA	K.A	M.N	AA.SH		
No.	Rev	Date	Status	Prepared	Checked	Approved		

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 136 of 167

General Data	1	Tag No.			UV-6202						
	2	P&ID	Line NO.	Piping Size	Piping Class	0062	6201	1/2"	4CC2		
	3	Fluid			State					Industrial water	
	4	Pressure rating			Piping material					150 #	CARBON STEEL
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max			(-20)°C / 50°C	0.82 Bara		86%	
	6	Area Classification			Area					ZONE 1	
Flow Rate	7	Max.Continuous			Unit					2500	Kg/h
	8	Min.Continuous			Unit					300	Kg/h
	9	Full scale			Unit					3000	
	10	Max.In Transients			Unit						Kg/h
Press	11	Allow. with closed valve			Unit					0	Kg/h
	12	Norm . Op. upstr. Press			Unit					4	barg
	13	Max inlet pressure			Unit					10	
	14	Dp. At max. flowrate			Unit					3.5	bar
Temperature	15	Allow pressure drop			Unit					0.1	bar
	16	Norm . upstr. Temp			Unit					AMB	-C
	17	Max . upstr. Temp			Unit					+120	-C
Sp. Gr.	18	Gases vapours			Unit						Kg/m3
	19	Liquids			Unit						Kg/m3
	20	Mol.weight			Unit						Kg/Kmol
Visc.	21	Viscosity at op cond			Unit						mpa's
	22	Solid in suspension			Unit						
Cv	23	Min/Norm/Max			Required					VTA	VTA
Body	24	Body type			Body material					Ball	CARBON STEEL
	25	Size Body			Port					1/2"	single
	26	Design Pressure			Min. Bar a		Max. Bar a				Barg
	27	Design Temperature			Min. °C		Max. °C				-C
	28	Valve end con. & rating			Seat leakage class					Flange 150 #	ANSI IV
	29	Packing mat.			Lubricator					PTFE	VTA
	30	Flow direction			Unit						
Trim	31	Bonnet type			Unit					Standard	
	32	Plug type			Plug material					Ball	SS - 316
	33	Seat Material			Cage/Guide Material					SS - 316	NA
Actuator	34	Characteristics			Unit					Full bore	
	35	Type / Direction of action			Unit					Cylinder&Piston	
	36	Fail Position			Unit					Close	
	37	Spring range			Unit					VTA	
Positioner	38	On-Off/Modulating			Single/Double Acting		Unit			On/Off	Single Acting
	39	Type			Unit					NA	
	40	Input signal			Out put signal					NA	NA
	41	Air supply			Action dir.					NA	NA
Solenoid Valve	42	Protection			Certificate					NA	NA
	43	Type			QTY					3-Way	1
	44	Tag No.			Unit					UY-6202	
	45	Supply Voltage			Consumption					24VDC	VTA (Ex-ib)
Accessories	46	Protection			Certificate					IP 65	EExib-IIC T3
	47	Pressure gauge and filter			Unit					YES	
	48	Manual Control Wheel			Unit					M20	
	49	Cable Gland			Size/Qty					NA	
	50	Electrical Connection			Unit					CLOSE & OPEN SWITCH	
	51	Tubing & Connection			Unit					SS Tube 1/4"	
	52	Switch			Protection		Certificate			Open&Closed switches	IP 65

1	0	12/20/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 137 of 167

General Data	1	Tag No.			UV-6251 (P4) (2" #150 PAD RF)				
	2	P&ID	Line NO.	Piping Size	Piping Class	0062	6202	2"	1CS1
	3	Fluid			State	Process			
	4	Pressure rating			Piping material	150 # STAINLESS STEEL			
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara	86%	
	6	Area Classification			Area	ZONE 1			
Flow Rate	7	Max.Continuous			Unit	458	Kg/h		
	8	Min.Continuous			Unit	50	Kg/h		
	9	Max.In Transients			Unit	550	Kg/h		
	10	Allow. with closed valve			Unit	0	Kg/h		
Press	11	Norm . Op. upstr. Press			Unit	0.1	barg		
	12	Dp. At max. flowrate			Unit	0.1	bar		
	13	Max. Dp with closed valve			Unit	1	bar		
Temperature	14	Norm . upstr. Temp			Unit	+90	°C		
	15	Max . upstr. Temp			Unit	+180	°C		
Sp. Gr.	16	Gases vapours			Unit	Kg/m3			
	17	Liquids			Unit	Kg/m3			
	18	Mol.weight			Unit	Kg/Kmol			
Visc.	19	Op. visc. (when>5mpa's)							
	20	Solid in suspension							
Cv	21	Min/Norm/Max			Required	VTA		VTA	
	22	Body type			Body material	Super thin Ball valve		SS - 316	
Body	23	Size Body			Port	2"		single	
	24	Design Pressure			Min. Bar a Max. Bar a	Barg			
	25	Design Temperature			Min. °C Max. °C	°C			
	26	Valve end con. & rating			Seat leakage class	Flange 150#		ANSI IV	
	27	Packing mat.			Lubricator	PTFE		VTA	
	28	Flow direction							
	29	Bonnet type			Standard				
	Trim	30	Plug type			Plug material	Ball		SS - 316
31		Seat Material			Cage/Guide Material	SS - 316		NA	
32		Characteristics			NA				
Actuator	33	Type / Direction of action			Cylinder&Piston				
	34	Fail Position			Close				
	35	Spring range			NA				
	36	On-Off/Modulating			Single/Double Acting	On/Off		Double Acting	
Positioner	37	Type			NA				
	38	Input signal			Out put signal	NA		NA	
	39	Air supply			Action dir.	NA		NA	
	40	Protection			Certificate	NA		NA	
Solenoid Valve	41	Type			QTY	4-Way		1	
	42	Tag No.			UY-6251				
	43	Supply Voltage			Consumption	24VDC		VTA(Ex-ib)	
	44	Protection			Certificate	IP 65		EEExib-IIB T3	
Accessories	45	Pressure gauge and filter			NA				
	46	Manual Control Wheel			NA				
	47	Cable Gland			Size/Qty	NA			
	48	Electrical Conection			M20				
	49	Tubing & Conection			NA				
	50	Switch			Protection	Certificate	CLOSE & OPEN SWITCH	IP 65	EEExib-IIB T3
1	0	12/20/2021			IFA	K.A	M.N	AA.SH	
No.	Rev	Date			Status	Prepared	Checked	Approved	

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 138 of 167

General Data	1	Tag No.			UV-7101 (P9) (6" #300 PAD RF)			
	2	P&ID	Line NO.	Piping Size	Piping Class	0071	V-711 6"	
	3	Fluid		State	LLDPE		Solid+Liquid	
	4	Pressure rating		Piping material	#300			
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara 86%	
	6	Area Classification		Area	ZONE 1			
Flow Rate	7	Max.Continuous	Unit	458		Kg/h		
	8	Min.Continuous	Unit	55		Kg/h		
	9	Full scale		550				
	10	Max.In Transients	Unit			Kg/h		
Press	11	Allow. with closed valve	Unit	0		Kg/h		
	12	Norm . Op. upstr. Press	Unit	0.1		barg		
	13	Max inlet pressure		15				
	14	Dp. At max. flowrate	Unit	0.1		bar		
Temperature	15	Allow pressure drop	Unit			bar		
	16	Norm . upstr. Temp	Unit	AMB		-C		
	17	Max . upstr. Temp	Unit	-60 +180		-C		
Sp. Gr.	18	Gases vapours	Unit			Kg/m3		
	19	Liquids	Unit			Kg/m3		
	20	Mol.weight	Unit			Kg/Kmol		
Visc.	21	Viscosity at op cond	Unit			mpa's		
	22	Solid in suspension						
Cv	23	Min/Norm/Max	Required	VTA		VTA		
Body	24	Body type	Body material	Ball		SS - 316		
	25	Size Body	Port	6"		single		
	26	Design Pressure	Min. Bar a	Max. Bar a			Barg	
	27	Design Temperature	Min. °C	Max. °C			-C	
	28	Valve end con. & rating	Seat leakage class				ANSI IV	
	29	Packing mat.	Lubricator		PTFE		VTA	
	30	Flow direction						
Trim	31	Bonnet type			Standard			
	32	Plug type	Plug material	Ball		SS - 316		
	33	Seat Material	Cage/Guide Material	SS - 316		NA		
Actuator	34	Characteristics			Full bore			
	35	Type / Direction of action			Cylinder&Piston			
	36	Fail Position			Close			
	37	Spring range			VTA			
Positioner	38	On-Off/Modulating	Single/Double Acting	On/Off		Single Acting		
	39	Type			NA			
	40	Input signal	Out put signal	NA		NA		
	41	Air supply	Action dir.	NA		NA		
Solenoid Valve	42	Protection	Certificate	NA		NA		
	43	Type	QTY	3-Way		1		
	44	Tag No.			UY-7101			
	45	Supply Voltage	Consumption	24VDC		VTA (Ex-ib)		
Accessories	46	Protection	Certificate	IP 65		EExib-IIC T3		
	47	Pressure gauge and filter			YES			
	48	Manual Control Wheel			M20			
	49	Cable Gland	Size/Qty	NA				
	50	Electrical Conection			CLOSE & OPEN SWITCH			
	51	Tubing & Conection			SS Tube 1/4"			
	52	Switch	Protection	Certificate	Open&Closed switches	IP 65	EExib-IIC T3	

1	0	12/20/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 139 of 167

General Data	1	Tag No.			UV-7102					
	2	P&ID	Line NO.	Piping Size	Piping Class	0071	7105	1/2"	3CS6(IA)	
	3	Fluid			State					
	4	Pressure rating			Piping material		150#			STAINLESS STEEL
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max		(-20)°C / 50°C		0.82 Bara		86%
	6	Area Classification			Area		ZONE 1			
Flow Rate	7	Max.Continuous		Unit		29		Kg/h		
	8	Min.Continuous		Unit		3.5		Kg/h		
	9	Full scale		Unit		35		Kg/h		
	10	Max.In Transients		Unit				Kg/h		
Press	11	Allow. with closed valve		Unit		0		Kg/h		
	12	Norm . Op. upstr. Press		Unit		6		barg		
	13	Max inlet pressure		Unit		15		bar		
	14	Dp. At max. flowrate		Unit		5.5		bar		
Temperature	15	Allow pressure drop		Unit		0.1		bar		
	16	Norm . upstr. Temp		Unit		AMB		-C		
	17	Max . upstr. Temp		Unit		+200		-C		
Sp. Gr.	18	Gases vapours		Unit				Kg/m3		
	19	Liquids		Unit				Kg/m3		
	20	Mol.weight		Unit				Kg/Kmol		
Visc.	21	Viscosity at op cond		Unit				mpa's		
	22	Solid in suspension		Unit						
Cv	23	Min/Norm/Max		Required		VTA		VTA		
	24	Body type		Body material		Ball		SS - 316		
Body	25	Size Body		Port		1/2"		single		
	26	Design Pressure		Min. Bar a		Max. Bar a		Barg		
	27	Design Temperature		Min. °C		Max. °C		-C		
	28	Valve end con. & rating		Seat leakage class		Flange 150 #		ANSI IV		
	29	Packing mat.		Lubricator		PTFE		VTA		
	30	Flow direction		Unit						
	31	Bonnet type		Unit				Standard		
Trim	32	Plug type		Plug material		Ball		SS - 316		
	33	Seat Material		Cage/Guide Material		SS - 316		NA		
	34	Characteristics		Unit				Full bore		
Actuator	35	Type / Direction of action		Unit				Cylinder&Piston		
	36	Fail Position		Unit				Close		
	37	Spring range		Unit				VTA		
	38	On-Off/Modulating		Single/Double Acting		On/Off		Single Acting		
Positioner	39	Type		Unit				NA		
	40	Input signal		Out put signal		NA		NA		
	41	Air supply		Action dir.		NA		NA		
	42	Protection		Certificate		NA		NA		
Solenoid Valve	43	Type		QTY		3-Way		1		
	44	Tag No.		Unit				UY-7102		
	45	Supply Voltage		Consumption		24VDC		VTA (Ex-ib)		
Accessories	46	Protection		Certificate		IP 65		EExib-IIC T3		
	47	Pressure gauge and filter		Unit				YES		
	48	Manual Control Wheel		Unit				M20		
	49	Cable Gland		Size/Qty		NA				
	50	Electrical Conection		Unit				CLOSE & OPEN SWITCH		
	51	Tubing & Conection		Unit				SS Tube 1/4"		
	52	Switch		Protection		Certificate		Open&Closed switches		

1	0	12/20/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 140 of 167

General Data	1	Tag No.			UV-7103 (P8) (6" #150 PAD RF)			
	2	P&ID	Line NO.	Piping Size	Piping Class	0071	V-712	6"
	3	Fluid		State	LLDPE+MONOMER		Solid+Gas Liquid	
	4	Pressure rating		Piping material	#150		S.S	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara	86%
	6	Area Classification		Area	ZONE 1			
Flow Rate	7	Max.Continuous	Unit	458		Kg/h		
	8	Min.Continuous	Unit	55		Kg/h		
	9	Full scale		550				
	10	Max.In Transients	Unit			Kg/h		
Press	11	Allow. with closed valve	Unit	0		Kg/h		
	12	Norm . Op. upstr. Press	Unit	0.1		barg		
	13	Max inlet pressure		6				
	14	Dp. At max. flowrate	Unit	0.1		bar		
Temperature	15	Allow pressure drop	Unit			bar		
	16	Norm . upstr. Temp	Unit	AMB		-C		
	17	Max . upstr. Temp	Unit	-60 +180		-C		
Sp. Gr.	18	Gases vapours	Unit			Kg/m3		
	19	Liquids	Unit			Kg/m3		
	20	Mol.weight	Unit			Kg/Kmol		
Visc.	21	Viscosity at op cond	Unit			mpa's		
	22	Solid in suspension						
Cv	23	Min/Norm/Max	Required	VTA		VTA		
Body	24	Body type	Body material	Ball		SS - 316		
	25	Size Body	Port			single		
	26	Design Pressure	Min. Bar a	Max. Bar a			Barg	
	27	Design Temperature	Min. °C	Max. °C			-C	
	28	Valve end con. & rating	Seat leakage class	Flange 150 #		ANSI IV		
	29	Packing mat.	Lubricator	PTFE		VTA		
	30	Flow direction						
Trim	31	Bonnet type		Standard				
	32	Plug type	Plug material	Ball		SS - 316		
	33	Seat Material	Cage/Guide Material	SS - 316		NA		
Actuator	34	Characteristics		Full bore				
	35	Type / Direction of action		Cylinder&Piston				
	36	Fail Position		Close				
	37	Spring range		VTA				
Positioner	38	On-Off/Modulating	Single/Double Acting	On/Off		Single Acting		
	39	Type		NA				
	40	Input signal	Out put signal	NA		NA		
	41	Air supply	Action dir.	NA		NA		
Solenoid Valve	42	Protection	Certificate	NA		NA		
	43	Type	QTY	3-Way		1		
	44	Tag No.		UY-7103				
	45	Supply Voltage	Consumption	24VDC		VTA (Ex-ib)		
Accessories	46	Protection	Certificate	IP 65		EExib-IIC T3		
	47	Pressure gauge and filter		YES				
	48	Manual Control Wheel		M20				
	49	Cable Gland	Size/Qty	NA				
	50	Electrical Conection		CLOSE & OPEN SWITCH				
	51	Tubing & Conection		SS Tube 1/4"				
	52	Switch	Protection	Certificate	Open&Closed switches	IP 65	EExib-IIC T3	

1	0	12/20/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 141 of 167

General Data	1	Tag No.			UV-7104			
	2	P&ID	Line NO.	Piping Size	Piping Class	0071	V-712	6"
	3	Fluid			State	Polymer + Monomer		S.S
	4	Pressure rating			Piping material	#150		
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara	86%
	6	Area Classification			Area	ZONE 1		
Flow Rate	7	Max.Continuous			Unit	458	Kg/h	
	8	Min.Continuous			Unit	55	Kg/h	
	9	Full scale				550		
	10	Max.In Transients			Unit		Kg/h	
Press	11	Allow. with closed valve			Unit	0	Kg/h	
	12	Norm . Op. upstr. Press			Unit	0.1	barg	
	13	Max inlet pressure				6		
	14	Dp. At max. flowrate			Unit	0.1	bar	
Temperature	15	Allow pressure drop			Unit		bar	
	16	Norm . upstr. Temp			Unit	AMB	-C	
	17	Max . upstr. Temp			Unit	-60 +180	-C	
Sp. Gr.	18	Gases vapours			Unit		Kg/m3	
	19	Liquids			Unit		Kg/m3	
	20	Mol.weight			Unit		Kg/Kmol	
Visc.	21	Viscosity at op cond			Unit		mpa's	
	22	Solid in suspension						
Cv	23	Min/Norm/Max		Required	VTA		VTA	
Body	24	Body type		Body material	Ball		SS - 316	
	25	Size Body		Port			single	
	26	Design Pressure		Min. Bar a	Max. Bar a		Barg	
	27	Design Temperature		Min. °C	Max. °C		-C	
	28	Valve end con. & rating		Seat leakage class		Flange 150 #		ANSI IV
	29	Packing mat.		Lubricator		PTFE		VTA
	30	Flow direction						
Trim	31	Bonnet type			Standard			
	32	Plug type		Plug material	Ball		SS - 316	
	33	Seat Material		Cage/Guide Material	SS - 316		NA	
Actuator	34	Characteristics			Full bore			
	35	Type / Direction of action			Cylinder&Piston			
	36	Fail Position			Close			
	37	Spring range			VTA			
Positioner	38	On-Off/Modulating		Single/Double Acting	On/Off		Single Acting	
	39	Type			NA			
	40	Input signal		Out put signal	NA		NA	
	41	Air supply		Action dir.	NA		NA	
Solenoid Valve	42	Protection		Certificate	NA		NA	
	43	Type		QTY	3-Way		1	
	44	Tag No.			UY-7104			
	45	Supply Voltage		Consumption	24VDC		VTA (Ex-ib)	
Accessories	46	Protection		Certificate	IP 65		EExib-IIC T3	
	47	Pressure gauge and filter			YES			
	48	Manual Control Wheel			M20			
	49	Cable Gland		Size/Qty	NA			
	50	Electrical Conection			CLOSE & OPEN SWITCH			
	51	Tubing & Conection			SS Tube 1/4"			
	52	Switch		Protection	Certificate	Open&Closed switches	IP 65	EExib-IIC T3

1	0	12/20/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 142 of 167

General Data	1	Tag No.			UV-7105				
	2	P&ID	Line NO.	Piping Size	Piping Class	0071	7104	1/2"	1CS1
	3	Fluid			State	Nitrogen To BDG			
	4	Pressure rating			Piping material	150#		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara		86%
	6	Area Classification			Area	ZONE 1			
Flow Rate	7	Max.Continuous			Unit	37.5		Kg/h	
	8	Min.Continuous			Unit	4.5		Kg/h	
	9	Full scale			45				
	10	Max.In Transients			Unit	Kg/h			
Press	11	Allow. with closed valve			Unit	0		Kg/h	
	12	Norm . Op. upstr. Press			Unit	4		barg	
	13	Max inlet pressure			6				
	14	Dp. At max. flowrate			Unit	3.9		bar	
Temperature	15	Allow pressure drop			Unit	bar			
	16	Norm . upstr. Temp			Unit	AMB		-C	
	17	Max . upstr. Temp			Unit	-60 +180		-C	
Sp. Gr.	18	Gases vapours			Unit	Kg/m3			
	19	Liquids			Unit	Kg/m3			
	20	Mol.weight			Unit	Kg/Kmol			
Visc.	21	Viscosity at op cond			Unit	mpa's			
	22	Solid in suspension							
Cv	23	Min/Norm/Max		Required	VTA		VTA		
Body	24	Body type		Body material	Ball		SS - 316		
	25	Size Body		Port	1/2"		single		
	26	Design Pressure		Min. Bar a	Max. Bar a			Barg	
	27	Design Temperature		Min. °C	Max. °C			-C	
	28	Valve end con. & rating		Seat leakage class		Flange 150 #		ANSI IV	
	29	Packing mat.		Lubricator		PTFE		VTA	
	30	Flow direction							
Trim	31	Bonnet type			Standard				
	32	Plug type		Plug material	Ball		SS - 316		
	33	Seat Material		Cage/Guide Material	SS - 316		NA		
Actuator	34	Characteristics			Full bore				
	35	Type / Direction of action			Cylinder&Piston				
	36	Fail Position			Close				
	37	Spring range			VTA				
Positioner	38	On-Off/Modulating		Single/Double Acting	On/Off		Single Acting		
	39	Type			NA				
	40	Input signal		Out put signal	NA		NA		
	41	Air supply		Action dir.	NA		NA		
Solenoid Valve	42	Protection		Certificate	NA		NA		
	43	Type		QTY	3-Way		1		
	44	Tag No.			UY-7105				
	45	Supply Voltage		Consumption	24VDC		VTA (Ex-ib)		
Accessories	46	Protection		Certificate	IP 65		EExib-IIC T3		
	47	Pressure gauge and filter			YES				
	48	Manual Control Wheel			M20				
	49	Cable Gland		Size/Qty	NA				
	50	Electrical Conection			CLOSE & OPEN SWITCH				
	51	Tubing & Conection			SS Tube 1/4"				
	52	Switch		Protection	Certificate	Open&Closed switches		IP 65 EExib-IIC T3	

1	0	12/20/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 143 of 167

General Data	1	Tag No.			UV-7106				
	2	P&ID	Line NO.	Piping Size	Piping Class	0071	7105	1/2"	1CS2
	3	Fluid			State		Nitrogen		
	4	Pressure rating			Piping material		150# STAINLESS STEEL		
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max		(-20)°C / 50°C		0.82 Bara	86%
	6	Area Classification			Area		ZONE 1		
Flow Rate	7	Max.Continuous			Unit		37.5		Kg/h
	8	Min.Continuous			Unit		4.5		Kg/h
	9	Full scale			Unit		45		
	10	Max.In Transients			Unit				Kg/h
Press	11	Allow. with closed valve			Unit		0		Kg/h
	12	Norm . Op. upstr. Press			Unit		4		barg
	13	Max inlet pressure			Unit		6		
	14	Dp. At max. flowrate			Unit		3.5		bar
Temperature	15	Allow pressure drop			Unit				bar
	16	Norm . upstr. Temp			Unit		AMB		-C
	17	Max . upstr. Temp			Unit		-60 +180		-C
Sp. Gr.	18	Gases vapours			Unit				Kg/m3
	19	Liquids			Unit				Kg/m3
	20	Mol.weight			Unit				Kg/Kmol
Visc.	21	Viscosity at op cond			Unit				mpa's
	22	Solid in suspension			Unit				
Cv	23	Min/Norm/Max		Required		VTA		VTA	
Body	24	Body type		Body material		Ball		SS - 316	
	25	Size Body		Port		1/2"		single	
	26	Design Pressure		Min. Bar a	Max. Bar a			Barg	
	27	Design Temperature		Min. °C	Max. °C			-C	
	28	Valve end con. & rating		Seat leakage class		Flange 150 #		ANSI IV	
	29	Packing mat.		Lubricator		PTFE		VTA	
	30	Flow direction			Unit				
Trim	31	Bonnet type			Unit		Standard		
	32	Plug type		Plug material		Ball		SS - 316	
	33	Seat Material		Cage/Guide Material		SS - 316		NA	
Actuator	34	Characteristics			Unit		Full bore		
	35	Type / Direction of action			Unit		Cylinder&Piston		
	36	Fail Position			Unit		Close		
	37	Spring range			Unit		VTA		
Positioner	38	On-Off/Modulating		Single/Double Acting		On/Off		Single Acting	
	39	Type			Unit		NA		
	40	Input signal		Out put signal		NA		NA	
	41	Air supply		Action dir.		NA		NA	
Solenoid Valve	42	Protection		Certificate		NA		NA	
	43	Type		QTY		3-Way		1	
	44	Tag No.			Unit		UY-7106		
	45	Supply Voltage		Consumption		24VDC		VTA (Ex-ib)	
Accessories	46	Protection		Certificate		IP 65		EExib-IIC T3	
	47	Pressure gauge and filter			Unit		YES		
	48	Manual Control Wheel			Unit		M20		
	49	Cable Gland		Size/Qty		NA			
	50	Electrical Conection			Unit		CLOSE & OPEN SWITCH		
	51	Tubing & Conection			Unit		SS Tube 1/4"		
	52	Switch		Protection	Certificate	Open&Closed switches	IP 65	EExib-IIC T3	

1	0	12/20/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 144 of 167

General Data	1	Tag No.			UV-7107				
	2	P&ID	Line NO.	Piping Size	Piping Class	0071	7107	1/2"	3CS6(IA)
	3	Fluid			State		Low Pressure Steam		
	4	Pressure rating			Piping material		150# STAINLESS STEEL		
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max		(-20)°C / 50°C	0.82 Bara		86%
	6	Area Classification			Area		ZONE 1		
Flow Rate	7	Max.Continuous			Unit		37.5 Kg/h		
	8	Min.Continuous			Unit		4.5 Kg/h		
	9	Full scale			Unit		45		
	10	Max.In Transients			Unit		Kg/h		
Press	11	Allow. with closed valve			Unit		0 Kg/h		
	12	Norm . Op. upstr. Press			Unit		6 barg		
	13	Max inlet pressure			Unit		15 barg		
	14	Dp. At max. flowrate			Unit		5.5 bar		
Temperature	15	Allow pressure drop			Unit		0.1 bar		
	16	Norm . upstr. Temp			Unit		AMB -C		
	17	Max . upstr. Temp			Unit		+200 -C		
Sp. Gr.	18	Gases vapours			Unit		Kg/m3		
	19	Liquids			Unit		Kg/m3		
	20	Mol.weight			Unit		Kg/Kmol		
Visc.	21	Viscosity at op cond			Unit		mpa's		
	22	Solid in suspension			Unit				
Cv	23	Min/Norm/Max			Required		VTA VTA		
	24	Body type			Body material		Ball SS - 316		
Body	25	Size Body			Port		1/2" single		
	26	Design Pressure			Min. Bar a	Max. Bar a	Barg		
	27	Design Temperature			Min. °C	Max. °C	-C		
	28	Valve end con. & rating			Seat leakage class		Flange 150 #		ANSI IV
	29	Packing mat.			Lubricator		PTFE		VTA
	30	Flow direction			Unit				
	31	Bonnet type			Unit		Standard		
Trim	32	Plug type			Plug material		Ball SS - 316		
	33	Seat Material			Cage/Guide Material		SS - 316 NA		
	34	Characteristics			Unit		Full bore		
Actuator	35	Type / Direction of action			Unit		Cylinder&Piston		
	36	Fail Position			Unit		Close		
	37	Spring range			Unit		VTA		
	38	On-Off/Modulating			Single/Double Acting		On/Off		Single Acting
Positioner	39	Type			Unit		NA		
	40	Input signal			Out put signal		NA		NA
	41	Air supply			Action dir.		NA		NA
	42	Protection			Certificate		NA		NA
Solenoid Valve	43	Type			QTY		3-Way		1
	44	Tag No.			Unit		UY-7107		
	45	Supply Voltage			Consumption		24VDC		VTA (Ex-ib)
Accessories	46	Protection			Certificate		IP 65		EExib-IIC T3
	47	Pressure gauge and filter			Unit		YES		
	48	Manual Control Wheel			Unit		M20		
	49	Cable Gland			Size/Qty		NA		
	50	Electrical Connection			Unit		CLOSE & OPEN SWITCH		
	51	Tubing & Connection			Unit		SS Tube 1/4"		
	52	Switch			Protection	Certificate	Open&Closed switches	IP 65	EExib-IIC T3
	53				Unit				

1	0	12/20/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 145 of 167

General Data	1	Tag No.			UV-7153				
	2	P&ID	Line NO.	Piping Size	Piping Class	0071	7105	3"	1DS4
	3	Fluid			State	Blow Down Liquid			
	4	Pressure rating			Piping material	300#		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara		86%
	6	Area Classification			Area	ZONE 1			
Flow Rate	7	Max.Continuous			Unit	7500		Kg/h	
	8	Min.Continuous			Unit	900		Kg/h	
	9	Full scale			9000				
	10	Max.In Transients			Unit	Kg/h			
Press	11	Allow. with closed valve			Unit	0		Kg/h	
	12	Norm . Op. upstr. Press			Unit	0.1		barg	
	13	Max inlet pressure			15				
	14	Dp. At max. flowrate			Unit	0.1		bar	
Temperature	15	Allow pressure drop			Unit	bar			
	16	Norm . upstr. Temp			Unit	AMB		-C	
	17	Max . upstr. Temp			Unit	-60 +180		-C	
Sp. Gr.	18	Gases vapours			Unit	Kg/m3			
	19	Liquids			Unit	Kg/m3			
	20	Mol.weight			Unit	Kg/Kmol			
Visc.	21	Viscosity at op cond			Unit	mpa's			
	22	Solid in suspension							
Cv	23	Min/Norm/Max		Required	VTA		VTA		
Body	24	Body type		Body material	Ball		SS - 316		
	25	Size Body		Port	3"		single		
	26	Design Pressure		Min. Bar a	Max. Bar a			Barg	
	27	Design Temperature		Min. °C	Max. °C			-C	
	28	Valve end con. & rating		Seat leakage class		Flange 300 #		ANSI IV	
	29	Packing mat.		Lubricator		PTFE		VTA	
	30	Flow direction							
Trim	31	Bonnet type			Standard				
	32	Plug type		Plug material	Ball		SS - 316		
	33	Seat Material		Cage/Guide Material	SS - 316		NA		
Actuator	34	Characteristics			Full bore				
	35	Type / Direction of action			Cylinder&Piston				
	36	Fail Position			Close				
	37	Spring range			VTA				
Positioner	38	On-Off/Modulating		Single/Double Acting	On/Off		MANUAL		
	39	Type			NA				
	40	Input signal		Out put signal	NA		NA		
	41	Air supply		Action dir.	NA		NA		
Solenoid Valve	42	Protection		Certificate	NA		NA		
	43	Type		QTY	4-Way		1		
	44	Tag No.			UY-7153				
	45	Supply Voltage		Consumption	24VDC		VTA (Ex-ib)		
Accessories	46	Protection		Certificate	IP 65		EExib-IIC T3		
	47	Pressure gauge and filter			YES				
	48	Manual Control Wheel			M20				
	49	Cable Gland		Size/Qty	NA				
	50	Electrical Conection			CLOSE & OPEN SWITCH				
	51	Tubing & Conection			SS Tube 1/4"				
	52	Switch		Protection	Certificate	Open&Closed switches		IP 65 EExib-IIC T3	

1	0	12/20/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved

PROJECT: PP-PE PILOT PLANT

TITLE: ON/OFF Valve Data Sheet





شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی


Contractor Job No: _____ Doc. No: 900-DAS-A4-IN-0002
Owner Job No: _____ Sheet No: 146 of 167


General Data	1	Tag No.			UV-7154				
	2	P&ID	Line NO.	Piping Size	Piping Class	0071	7107	6"	1DS4
	3	Fluid			State	Blow Down Liquid			
	4	Pressure rating			Piping material	300#		STAINLESS STEEL	
	5	Amb.Temp	Amb Press	Amb.Rel.Humidity Max	(-20)°C / 50°C		0.82 Bara		86%
	6	Area Classification			Area	ZONE 1			
Flow Rate	7	Max.Continuous			Unit	7500		Kg/h	
	8	Min.Continuous			Unit	900		Kg/h	
	9	Full scale			9000				
	10	Max.In Transients			Unit	Kg/h			
Press	11	Allow. with closed valve			Unit	0		Kg/h	
	12	Norm . Op. upstr. Press			Unit	0.1		barg	
	13	Max inlet pressure			15				
	14	Dp. At max. flowrate			Unit	0.1		bar	
Temperature	15	Allow pressure drop			Unit	bar			
	16	Norm . upstr. Temp			Unit	AMB		-C	
	17	Max . upstr. Temp			Unit	-60 +180		-C	
Sp. Gr.	18	Gases vapours			Unit	Kg/m3			
	19	Liquids			Unit	Kg/m3			
	20	Mol.weight			Unit	Kg/Kmol			
Visc.	21	Viscosity at op cond			Unit	mpa's			
	22	Solid in suspension							
Cv	23	Min/Norm/Max		Required	VTA		VTA		
Body	24	Body type		Body material	Ball		SS - 316		
	25	Size Body		Port	6"		single		
	26	Design Pressure		Min. Bar a	Max. Bar a			Barg	
	27	Design Temperature		Min. °C	Max. °C			-C	
	28	Valve end con. & rating		Seat leakage class		Flange 300 #		ANSI IV	
	29	Packing mat.		Lubricator		PTFE		VTA	
	30	Flow direction							
Trim	31	Bonnet type			Standard				
	32	Plug type		Plug material	Ball		SS - 316		
	33	Seat Material		Cage/Guide Material	SS - 316		NA		
Actuator	34	Characteristics			Full bore				
	35	Type / Direction of action			Cylinder&Piston				
	36	Fail Position			Close				
	37	Spring range			VTA				
Positioner	38	On-Off/Modulating		Single/Double Acting	On/Off		MANUAL		
	39	Type			NA				
	40	Input signal		Out put signal	NA		NA		
	41	Air supply		Action dir.	NA		NA		
Solenoid Valve	42	Protection		Certificate	NA		NA		
	43	Type		QTY	4-Way		1		
	44	Tag No.			UY-6101				
	45	Supply Voltage		Consumption	24VDC		VTA (Ex-ib)		
Accessories	46	Protection		Certificate	IP 65		EExib-IIC T3		
	47	Pressure gauge and filter			YES				
	48	Manual Control Wheel			M20				
	49	Cable Gland		Size/Qty	NA				
	50	Electrical Conection			CLOSE & OPEN SWITCH				
	51	Tubing & Conection			SS Tube 1/4"				
	52	Switch		Protection	Certificate	Open&Closed switches		IP 65 EExib-IIC T3	


1	0	12/20/2021	IFA	K.A	M.N	AA.SH
No.	Rev	Date	Status	Prepared	Checked	Approved


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
		DATA SHEET FOR ON/OFF VALVE		
		Contractor Job No:	Doc. No:	
		Owner Job No:	Sheet No. : of	
Valve (HV)	Item	UV-4401		
	Service	Bottom Discharg of T-351 to Disposal of		
	Location	T-351		
	P&I n.	0044		
	Fluid	1-Butene & Powder		
	State	LIQUID		
	Condition	Normal Pressure	Barg	20
		Normal DP	Barg	25
		Max Pressure	Barg	31
		Normal Temp.	°C	105
		Max. Temp.	°C	-60 +230
	Flowrate	Normal	Kg/h	14
		Minimum	Kg/h	1.4
		Full Scale	Kg/h	16.8
	Sp. Gr.	Gas vapurs	Kg/m3	
		Liquid	Kg/m3	462
		Mol. Weight	Kg/Kmol	
		Viscosity	mPa's	
	Type	FULL BORE BALL VALVE - Flanged - Raised Face		
	Size of Flange	1/2"		
	Rating	ANSI #300		
	Fire Safe Seat	YES		
	Body material + Trim Material + stem Material	forged S.Steel 316		
	Valve Seat	Metal to metal seated valves		
Valve Seat material	S.S 316			
SEAL	VTA(PTFE OR Carbographte)			
MANUFACTURER	VTA			
MODEL no.	VTA			
Ordering code information	VTA			
Certificates & Calibration	pressure test, inspection certificate-Works			
accessary	Marking(Tagging)			


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. :		of	
Pneumatic Piston+Cylinder Actuator	Type of Actuator		Pneumatic Piston+Cylinder		
	Actuator size		VTA		
	Actuator ANGLE (torque)		0° - 90°		
	Acting = Spring Return or Double Acting Type		Double Effect		
	Air supply press. Barg		6		
	On Air Failure		CLOSE		
	Hand wheel + Declatched or Side type		NO		
	Body material		VTA (lightweight or Aluminium Body)		
	Valve position monitor		YES		
	Air filter regulator + Supply & output pressure gauge		YES		
	MANUFACTURER		VTA		
	MODEL no.		VTA		
	Ordering code information		VTA		
	accessary		Marking(Tagging)		
Solenoid	Solenoid Valve Type		3-way solenoid valve		
	Power Supply V DC		8 V DC		
	ENCLOSURE PROTECTION		EE xia , IIC , T4		
	Mounting Position (Remote version or compact)		Remote version (conection with tube)		
	single actuated with spring return mechanism				
	double actuated with two locking positions				
	On Power Failure		CLOSE		
	Threaded connection Size		(NPT) 1/2 or (NPT) 1/4		
	Degree of protection		IP 65 with filter check valve		
	Output current (mA)		≥ 1.6 mA		
	Electrical connection		M20 & 2		
	MANUFACTURER		VTA		
	Ordering code information		VTA		
	accessary		Marking(Tagging)		
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	1 = For close	
	Power Supply V DC		8 V DC		
	ENCLOSURE PROTECTION		EE xia , IIC , T4		
	Degree of protection		IP 65		
	Electrical connection		M20 & 2		
	MANUFACTURER		VTA		
	Ordering code information		VTA		
	accessary		NA		
0	00/02/01	M.AGHAMOHAMMADI	A.A.SHOKRI	N.NOUHJAH	
REV	Date	Status	Prepared	Checked	Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
		DATA SHEET FOR ON/OFF VALVE		
		Contractor Job No:	Doc. No:	
		Owner Job No:	Sheet No. : of	
Valve (HV)	Item	UV-4402		
	Service	CWR of E-351		
	Location	E-351		
	P&I n.	0044		
	Fluid	Water		
	State	LIQUID		
	Condition	Normal Pressure	Barg	4
		Normal DP	Barg	31
		Max Pressure	Barg	31
		Normal Temp.	°C	37
		Max. Temp.	°C	-60 +230
	Flowrate	Normal	Kg/h	4200
		Minimum	Kg/h	420
		Full Scale	Kg/h	5040
	Sp. Gr.	Gas vapurs	Kg/m3	
		Liquid	Kg/m3	1000
		Mol. Weight	Kg/Kmol	
		Viscosity	mPa's	
	Type	FULL BORE BALL VALVE - Flanged - Raised Face		
	Size of Flange	1 1/2"		
	Rating	ANSI #300		
	Fire Safe Seat	YES		
	Body material + Trim Material + stem Material	forged Carbon Steel (A105)		
	Valve Seat	Metal to metal seated valves		
	Valve Seat material	Carbon Steel		
	SEAL	VTA (PTFE OR Carbographte)		
	MANUFACTURER	VTA		
	MODEL no.	VTA		
Ordering code information	VTA			
Certificates & Calibration	pressure test, inspection certificate-Works			
accessary	Marking(Tagging)			

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Pneumatic Piston+Cylinder Actuator	Type of Actuator		Pneumatic Piston+Cylinder		
	Actuator size		VTA		
	Actuator ANGLE (torque)		0° - 90°		
	Acting = Spring Return or Double Acting Type		Spring Return (SINGOL ACTION)		
	Air supply press. Barg		6		
	On Air Failure		open		
	Hand wheel + Declutched or Side type		NO		
	Body material		VTA (lightweight or Aluminium Body)		
	Valve position monitor		YES		
	Air filter regulator + Supply & output pressure gauge		YES		
	MANUFACTURER		VTA		
	MODEL no.		VTA		
	Ordering code information		VTA		
	accessary		Marking(Tagging)		
Solenoid	Solenoid Valve Type		3-way solenoid valve		
	Power Supply V DC		8 V DC		
	ENCLOSURE PROTECTION		EE xia , IIC , T4		
	Mounting Position (Remote version or copmact)		Remote version (conection with tube)		
	single actuated with spring return mechanism				
	double actuated with two locking positions				
	On Power Failure		open		
	Threaded connection Size		(NPT) 1/2 or (NPT) 1/4		
	Degree of protection		IP 65 with filter check valve		
	Output current (mA)		≥ 1.6 mA		
	Electrical connection		M20 & 2		
	MANUFACTURER		VTA		
	Ordering code information		VTA		
	accessary		Marking(Tagging)		
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	1 = For close	
	Power Supply V DC		8 V DC		
	ENCLOSURE PROTECTION		EE xia , IIC , T4		
	Degree of protection		IP 65		
	Electrical connection		M20 & 2		
	MANUFACTURER		VTA		
	Ordering code information		VTA		
	accessary		NA		
0	00/02/01	M.AGHAMOHAMMADI	A.A.SHOKRI	N.NOUHJAH	
REV	Date	Status	Prepared	Checked	Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	UV-4403			
	Service	LPC of E-352			
	Location	E-352			
	P&I n.	0044			
	Fluid	Water			
	State	LIQUID			
	Condition	Normal Pressure	Barg	3	
		Normal DP	Barg	31	
		Max Pressure	Barg	31	
		Normal Temp.	°C	120	
		Max. Temp.	°C	-60 +230	
	Flowrate	Normal	Kg/h	60	
		Minimum	Kg/h	6	
		Full Scale	Kg/h	72	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size of Flange	1"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged Carbon Steel			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	Carbon Steel			
	SEAL	VTA(PTFE OR Carbographte)			
	MANUFACTURER	VTA			
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی		
		DATA SHEET FOR ON/OFF VALVE				
Contractor Job No:		Doc. No:				
Owner Job No:		Sheet No. :		of		
Pneumatic Piston+Cylinder Actuator	Type of Actuator		Pneumatic Piston+Cylinder			
	Actuator size		VTA			
	Actuator ANGLE (torque)		0° - 90°			
	Acting = Spring Return or Double Acting Type		Spring Return (SINGOL ACTION)			
	Air supply press. Barg		6			
	On Air Failure		CLOSE			
	Hand wheel + Declatched or Side type		NO			
	Body material		VTA (lightweight or Aluminium Body)			
	Valve position monitor		YES			
	Air filter regulator + Supply & output pressure gauge		YES			
	MANUFACTURER		VTA			
	MODEL no.		VTA			
	Ordering code information		VTA			
	accessary		Marking(Tagging)			
Solenoid	Solenoid Valve Type		3-way solenoid valve			
	Power Supply V DC		8 V DC			
	ENCLOSURE PROTECTION		EE xia , IIC , T4			
	Mounting Position (Remote version or copmact)		Remote version (conection with tube)			
	single actuated with spring return mechanism					
	double actuated with two locking positions					
	On Power Failure		Close			
	Threaded connection Size		(NPT) 1/2 or (NPT) 1/4			
	Degree of protection		IP 65 with filter check valve			
	Output current (mA)		≥ 1.6 mA			
	Electrical connection		M20 & 2			
	MANUFACTURER		VTA			
	Ordering code information		VTA			
	accessary		Marking(Tagging)			
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	1 = For close		
	Power Supply V DC		8 V DC			
	ENCLOSURE PROTECTION		EE xia , IIC , T4			
	Degree of protection		IP 65			
	Electrical connection		M20 & 2			
	MANUFACTURER		VTA			
	Ordering code information		VTA			
	accessary		NA			
0	00/02/01	M.AGHAMOHAMMADI	A.A.SHOKRI	N.NOUHJAH		
REV	Date	Status	Prepared	Checked	Approved	

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
		DATA SHEET FOR ON/OFF VALVE		
		Contractor Job No:	Doc. No:	
		Owner Job No:	Sheet No. : of	
Valve (HV)	Item	UV-4404		
	Service	Bottom of D-351 to Disposal of		
	Location	D-351		
	P&I n.	0044		
	Fluid	1-Butene & Powder		
	State	LIQUID		
	Condition	Normal Pressure	Barg	20
		Normal DP	Barg	25
		Max Pressure	Barg	31
		Normal Temp.	°C	105
		Max. Temp.	°C	-60 +230
	Flowrate	Normal	Kg/h	16
		Minimum	Kg/h	1.6
		Full Scale	Kg/h	19.2
	Sp. Gr.	Gas vapurs	Kg/m3	
		Liquid	Kg/m3	
		Mol. Weight	Kg/Kmol	
		Viscosity	mPa's	
	Type	FULL BORE BALL VALVE - Flanged - Raised Face		
	Size of Flange	1"		
	Rating	ANSI #300		
	Fire Safe Seat	YES		
	Body material + Trim Material + stem Material	forged S.Steel 316		
	Valve Seat	Metal to metal seated valves		
	Valve Seat material	S.S 316		
	SEAL	VTA (PTFE OR Carbographe)		
	MANUFACTURER	VTA		
	MODEL no.	VTA		
Ordering code information	VTA			
Certificates & Calibration	pressure test, inspection certificate-Works			
accessary	Marking(Tagging)			




		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. :		of	
Pneumatic Piston+Cylinder Actuator	Type of Actuator		Pneumatic Piston+Cylinder		
	Actuator size		VTA		
	Actuator ANGLE (torque)		0° - 90°		
	Acting = Spring Return or Double Acting Type		Spring Return (SINGOL ACTION)		
	Air supply press. Barg		6		
	On Air Failure		CLOSE		
	Hand wheel + Declutched or Side type		NO		
	Body material		VTA (lightweight or Aluminium Body)		
	Valve position monitor		YES		
	Air filter regulator + Supply & output pressure gauge		YES		
	MANUFACTURER		VTA		
	MODEL no.		VTA		
	Ordering code information		VTA		
	accessary		Marking(Tagging)		
Solenoid	Solenoid Valve Type		3-way solenoid valve		
	Power Supply V DC		8 V DC		
	ENCLOSURE PROTECTION		EE xia , IIC , T4		
	Mounting Position (Remote version or compact)		Remote version (conection with tube)		
	single actuated with spring return mechanism				
	double actuated with two locking positions				
	On Power Failure		CLOSE		
	Threaded connection Size		(NPT) 1/2 or (NPT) 1/4		
	Degree of protection		IP 65 with filter check valve		
	Output current (mA)		≥ 1.6 mA		
	Electrical connection		M20 & 2		
	MANUFACTURER		VTA		
	Ordering code information		VTA		
	accessary		Marking(Tagging)		
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	1 = For close	
	Power Supply V DC		8 V DC		
	ENCLOSURE PROTECTION		EE xia , IIC , T4		
	Degree of protection		IP 65		
	Electrical connection		M20 & 2		
	MANUFACTURER		VTA		
	Ordering code information		VTA		
	accessary		NA		
0	00/02/01	M.AGHAMOHAMMADI	A.A.SHOKRI	N.NOUHJAH	
REV	Date	Status	Prepared	Checked	Approved

Table 3.

Items	Tag ID.	Quantity
61	HV 2503	1
62	HV 2504	1
63	HV 2551	1
64	HV 2552	1
65	HV 2553	1
66	HV 2554	1
67	HV 2603	1
68	HV 2604	1
69	HV 2651	1
70	HV 2652	1
71	HV 2653	1
72	HV 2654	1
73	HV 3401	1
74	HV 4101	2
75	HV 4102	2
76	HV 4103	2
77	HV 4105	2
78	HV 4151	2
79	HV 4152	2
80	HV 4153	2
81	HV 4154	2
82	HV 4201	1
83	HV 4202	1
84	HV 4203	1
85	HV 4204	1
86	HV 4206	1
87	HV 4207	1
88	HV 4208	1
89	HV 4209	1
90	HV 4210	1
91	HV 4211	1
92	HV 4212	1
93	HV 4213	1
94	HV 4214	1
95	HV 4215	1
96	HV 4251	1
97	HV 4252	1
98	HV 4253	1
99	HV 4254	1
100	HV 4255	1
Numbers		48

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
		Contractor Job No:	Doc. No:		
		Owner Job No:	Sheet No. : of		
Valve (HV)	Item	HV 2503			
	Service	CY251 INLET			
	Location	LOCAL			
	P&I n.	312002_025			
	Fluid	SLURRY			
	State	LIQUID			
	Condition	Normal Pressure	Barg	28	
		Normal DP	Barg	38	
		Max Pressure	Barg	45	
		Normal Temp.	°C	20	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1½"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
Valve Seat material	316 SS				
SEAL	VTA (PTFE OR Carbographte)				
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
		DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:		Doc. No:		
Owner Job No:		Sheet No. : of		
Pneumatic Piston+Cylinder Actuator	Type of Actuator		Pneumatic Piston+Cylinder	
	Actuator size		VTA	
	Actuator ANGLE (torque)		0° - 90°	
	Acting = Spring Return or Double Acting Type		Spring Return (SINGOL ACTION)	
	Air supply press. Barg		6	
	On Air Failure		CLOSE	
	Hand wheel + Decoupled or Side type		NO	
	Body material		VTA (lightweight or Aluminium Body)	
	Valve position monitor		YES	
	Air filter regulator + Supply & output pressure gauge		YES	
	MANUFACTURER		VTA	
	MODEL no.		VTA	
	Ordering code information		VTA	
	accessary		Marking(Tagging)	
Solenoid	Solenoid Valve Type		3-way solenoid valve	
	Power Supply V DC		24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Mounting Position (Remote version or compact)		Remote version (connection with tube)	
	single actuated with spring return mechanism		YES	
	double actuated with two locking positions		NO	
	On Power Failure		open ways actuator and exhaust and air inside actuator discharges	
	Threaded connection Size		(NPT) 1/2 or (NPT) 1/4	
	Degree of protection		IP 65 with filter check valve	
	Output current (mA)		≥ 1.6 mA	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		Marking(Tagging)	
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC		8 V DC	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Degree of protection		IP 65	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		NA	

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی

شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

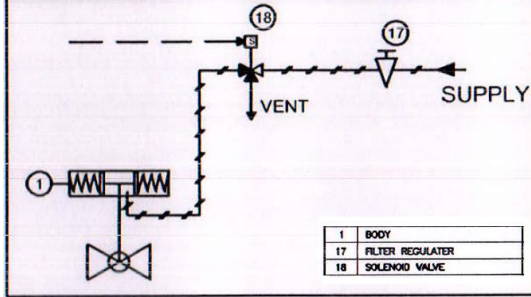

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 2504			
	Service	CY251 DISCHARGE			
	Location	LOCAL			
	P&I n.	312002_025			
	Fluid	POLYMER			
	State	SOLID			
	Condition	Normal Pressure	Barg	5	
		Normal DP	Barg	38	
		Max Pressure	Barg	45	
		Normal Temp.	°C	20	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3	400 (Polymer)	
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	WAPER FULL BORE BALL VALVE RAISED FACE			
	Size	1½"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA(PTFE OR Carbographeite)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
		DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:		Doc. No:		
Owner Job No:		Sheet No. : of		
Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder		
	Actuator size	VTA		
	Actuator ANGLE (torque)	0° - 90°		
	Acting = Spring Return or Double Acting Type	Spring Return (SINGOL ACTION)		
	Air supply press. Barg	6		
	On Air Failure	CLOSE		
	Hand wheel + Declutched or Side type	NO		
	Body material	VTA (lightweight or Aluminium Body)		
	Valve position monitor	YES		
	Air filter regulator + Supply & output pressure gauge	YES		
	MANUFACTURER	VTA		
	MODEL no.	VTA		
	Ordering code information	VTA		
	accessary	Marking(Tagging)		
Solenoid	Solenoid Valve Type	3-way solenoid valve		
	Quantity	2		
	Power Supply V DC	24 V DC, power consumption 26.71 mW		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Mounting Position (Remote version or compact)	Remote version (conection with tube)		
	single actuated with spring return mechanism	YES		
	double actuated with two locking positions	NO		
	On Power Failure	open ways actuator and exhaust and air inside actuator discharges		
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4		
	Degree of protection	IP 65 with filter check valve		
	Output current (mA)	≥ 1.6 mA		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
accessary	Marking(Tagging)			
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of


SCHEMATIC DIAGRAM

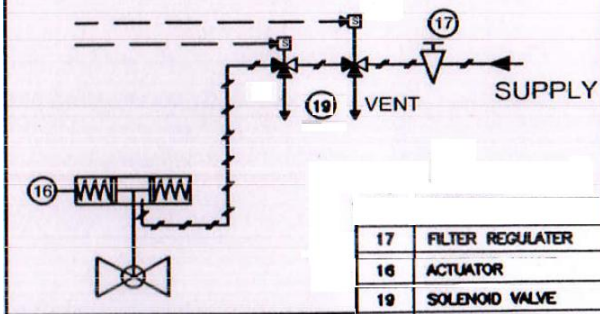

Date	Status	Prepared	Checked		Approved


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 2551			
	Service	CY 251 to BDG			
	Location	LOCAL			
	P&I n.	312002_025			
	Fluid	MONOMER			
	State	GAS			
	Condition	Normal Pressure	Barg	28	
		Normal DP	Barg	38	
		Max Pressure	Barg	40	
		Normal Temp.	°C	20	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
SEAL	VTA(PTFE OR Carbographte)				
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 2552			
	Service	CY 251 DISCHARGE			
	Location	LOCAL			
	P&I n.	312002_025			
	Fluid	POLYMER			
	State	SOLYD			
	Condition	Normal Pressure	Barg	28	
		Normal DP	Barg	38	
		Max Pressure	Barg	40	
		Normal Temp.	°C	20	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3	400 (Polymer)	
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1½"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA(PTFE OR Carbographe)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. :	of


Pneumatic Piston+Cylinder Actuator	Type of Actuator	NA		
	Actuator size	NA		
	Actuator ANGLE (torque)	NA		
	Acting = Spring Return or Double Acting Type	NA		
	Air supply press.	Barg	NA	
	On Air Failure	NA		
	Manual Hand-Wheel + Declutched or Side type	Manual Hand-Wheel		
	Body material	NA		
	Valve position monitor	NA		
	Air filter regulator + Supply & output pressure gauge	NA		
	MANUFACTURER	NA		
	MODEL no.	NA		
	Ordering code information	NA		
	accessary	NA		
	Solenoid	Solenoid Valve Type	NA	
Power Supply V DC		NA		
ENCLOSURE PROTECTION		NA		
Mounting Position (Remote version or compact)		NA		
single actuated with spring return mechanism		NA		
double actuated with two locking positions		NA		
On Power Failure		NA		
Threaded connection Size		NA		
Degree of protection		NA		
Output current (mA)		NA		
Electrical connection		NA		
MANUFACTURER		NA		
Ordering code information		NA		
accessary	NA			
Limit Switch Or Proximity Sensor	Type	Quantity	Proximity Sensor - Namur	1 = For close
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	Safety Barrier		


Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 2553			
	Service	NIT to HV2502			
	Location	LOCAL			
	P&I n.	312002_025			
	Fluid	NITROGEN			
	State	GAS			
	Condition	Normal Pressure	Barg	5	
		Normal DP	Barg	38	
		Max Pressure	Barg	40	
		Normal Temp.	°C	AMB (1)	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1/2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA(PTFE OR Carbographe)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Pneumatic Piston+Cylinder Actuator	Type of Actuator			NA	
	Actuator size			NA	
	Actuator ANGLE (torque)			NA	
	Acting = Spring Return or Double Acting Type			NA	
	Air supply press.	Barg			NA
	On Air Failure			NA	
	Manual Hand-Wheel + Declutched or Side type			Manual Hand-Wheel	
	Body material			NA	
	Valve position monitor			NA	
	Air filter regulator + Supply & output pressure gauge			NA	
	MANUFACTURER			NA	
	MODEL no.			NA	
	Ordering code information			NA	
	accessary			NA	
Solenoid	Solenoid Valve Type			NA	
	Power Supply V DC			NA	
	ENCLOSURE PROTECTION			NA	
	Mounting Position (Remote version or compact)			NA	
	single actuated with spring return mechanism			NA	
	double actuated with two locking positions			NA	
	On Power Failure			NA	
	Threaded connection Size			NA	
	Degree of protection			NA	
	Output current (mA)			NA	
	Electrical connection			NA	
	MANUFACTURER			NA	
	Ordering code information			NA	
	accessary			NA	
Limit Switch Or Proximity Sensor	Type	Quantity	Proximity Sensor - Namur	1 = For close	
	Power Supply V DC			8 V DC	
	ENCLOSURE PROTECTION			EE xia , IIC , T6	
	Degree of protection			IP 65	
	Electrical connection			M20 & 1.5	
	MANUFACTURER			VTA	
	Ordering code information			VTA	
	accessary			Safety Barrier	


Date	Status	Prepared	Checked		Approved


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 2554			
	Service	NIT to CY 251			
	Location	LOCAL			
	Fluid	NITROGEN			
	State	GAS			
	Condition	Normal Pressure	Barg	5	
		Normal DP	Barg	38	
		Max Pressure	Barg	45	
		Normal Temp.	°C	AMB (2)	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1/2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
SEAL	VTA (PTFE OR Carbographite)				
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

	PROJECT: PP-PE PILOT PLANT	 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
	DATA SHEET FOR ON/OFF VALVE	
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. : of	

Pneumatic Piston+Cylinder Actuator	Type of Actuator	NA		
	Actuator size	NA		
	Actuator ANGLE (torque)	NA		
	Acting = Spring Return or Double Acting Type	NA		
	Air supply press.	Barg	NA	
	On Air Failure	NA		
	Manual Hand-Wheel + Declutched or Side type	Manual Hand-Wheel		
	Body material	NA		
	Valve position monitor	NA		
	Air filter regulator + Supply & output pressure gauge	NA		
	MANUFACTURER	NA		
	MODEL no.	NA		
	Ordering code information	NA		
	accessary	NA		
	Solenoid	Solenoid Valve Type	NA	
Power Supply V DC		NA		
ENCLOSURE PROTECTION		NA		
Mounting Position (Remote version or compact)		NA		
single actuated with spring return mechanism		NA		
double actuated with two locking positions		NA		
On Power Failure		NA		
Threaded connection Size		NA		
Degree of protection		NA		
Output current (mA)		NA		
Electrical connection		NA		
MANUFACTURER		NA		
Ordering code information		NA		
accessary	NA			
Limit Switch Or Proximity Sensor	Type	Quantity	Proximity Sensor - Namur	1 = For close
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	Safety Barrier		

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
		Contractor Job No:	Doc. No:		
		Owner Job No:	Sheet No. : of		
Valve (HV)	Item	HV 2603			
	Service	CY261 INLET			
	Location	LOCAL			
	P&I n.	312002_026			
	Fluid	SLURRY			
	State	LIQUID			
	Condition	Normal Pressure	Barg	28	
		Normal DP	Barg	38	
		Max Pressure	Barg	45	
		Normal Temp.	°C	20	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1½"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
		DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:		Doc. No:		
Owner Job No:		Sheet No. : of		
Pneumatic Piston+Cylinder Actuator	Type of Actuator		Pneumatic Piston+Cylinder	
	Actuator size		VTA	
	Actuator ANGLE (torque)		0° - 90°	
	Acting = Spring Return or Double Acting Type		Spring Return (SINGOL ACTION)	
	Air supply press. Barg		6	
	On Air Failure		CLOSE	
	Hand wheel + Declutched or Side type		NO	
	Body material		VTA (lightweight or Aluminium Body)	
	Valve position monitor		YES	
	Air filter regulator + Supply & output pressure gauge		YES	
	MANUFACTURER		VTA	
	MODEL no.		VTA	
	Ordering code information		VTA	
	accessary		Marking(Tagging)	
Solenoid	Solenoid Valve Type		3-way solenoid valve	
	Power Supply V DC		24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Mounting Position (Remote version or compact)		Remote version (conection with tube)	
	single actuated with spring return mechanism		YES	
	double actuated with two locking positions		NO	
	On Power Failure		open ways actuator and exhaust and air inside actuator discharges	
	Threaded connection Size		(NPT) 1/2 or (NPT) 1/4	
	Degree of protection		IP 65 with filter check valve	
	Output current (mA)		≥ 1.6 mA	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		Marking(Tagging)	
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC		8 V DC	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Degree of protection		IP 65	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		NA	

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی

شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

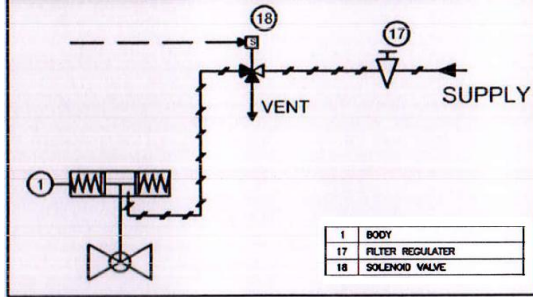

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 2604			
	Service	CY261 DISCHARGE			
	Location	LOCAL			
	P&I n.	312002_026			
	Fluid	POLYMER			
	State	SOLID			
	Condition	Normal Pressure	Barg	5	
		Normal DP	Barg	38	
		Max Pressure	Barg	45	
		Normal Temp.	°C	20	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3	400 (Polymer)	
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	WAFER FULL BORE BALL VALVE RAISED FACE			
	Size	1½"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA(PTFE OR Carbographte)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
		DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:		Doc. No:		
Owner Job No:		Sheet No. :	of	
Pneumatic Piston+Cylinder Actuator	Type of Actuator		Pneumatic Piston+Cylinder	
	Actuator size		VTA	
	Actuator ANGLE (torque)		0° - 90°	
	Acting = Spring Return or Double Acting Type		Spring Return (SINGOL ACTION)	
	Air supply press .		Barg 6	
	On Air Failure		CLOSE	
	Hand wheel + Declutched or Side type		NO	
	Body material		VTA (lightweight or Aluminium Body)	
	Valve position monitor		YES	
	Air filter regulator + Supply & output pressure gauge		YES	
	MANUFACTURER		VTA	
	MODEL no.		VTA	
	Ordering code information		VTA	
	accessary		Marking(Tagging)	
Solenoid	Solenoid Valve Type		3-way solenoid valve	
	Quantity		2	
	Power Supply V DC		24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Mounting Position (Remote version or copmact)		Remote version (conection with tube)	
	single actuated with spring return mechanism		YES	
	double actuated with two locking positions		NO	
	On Power Failure		open ways actuator and exhaust and air inside actuator discharges	
	Threaded connection Size		(NPT) 1/2 or (NPT) 1/4	
	Degree of protection		IP 65 with filter check valve	
	Output current (mA)		≥ 1.6 mA	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
accessary		Marking(Tagging)		
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC		8 V DC	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Degree of protection		IP 65	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		NA	

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

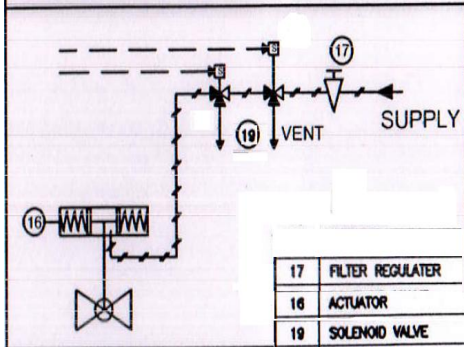


Date	Status	Prepared	Checked		Approved


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 2651			
	Service	CY 261 to BDG			
	Location	LOCAL			
	P&I n.	312002_026			
	Fluid	MONOMER			
	State	GAS			
	Condition	Normal Pressure	Barg	28	
		Normal DP	Barg	38	
		Max Pressure	Barg	40	
		Normal Temp.	°C	20	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA(PTFE OR Carbographte)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. :	of

Pneumatic Piston+Cylinder Actuator	Type of Actuator	NA		
	Actuator size	NA		
	Actuator ANGLE (torque)	NA		
	Acting = Spring Return or Double Acting Type	NA		
	Air supply press.	Barg	NA	
	On Air Failure	NA		
	Manual Hand-Wheel + Declutched or Side type	Manual Hand-Wheel		
	Body material	NA		
	Valve position monitor	NA		
	Air filter regulator + Supply & output pressure gauge	NA		
	MANUFACTURER	NA		
	MODEL no.	NA		
	Ordering code information	NA		
	accessary	NA		
	Solenoid	Solenoid Valve Type	NA	
Power Supply V DC		NA		
ENCLOSURE PROTECTION		NA		
Mounting Position (Remote version or compact)		NA		
single actuated with spring return mechanism		NA		
double actuated with two locking positions		NA		
On Power Failure		NA		
Threaded connection Size		NA		
Degree of protection		NA		
Output current (mA)		NA		
Electrical connection		NA		
MANUFACTURER		NA		
Ordering code information		NA		
accessary	NA			
Limit Switch Or Proximity Sensor	Type	Quantity	Proximity Sensor - Namur	1 = For close
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	Safety Barrier		


Date	Status	Prepared	Checked		Approved


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 2652			
	Service	CY 261 DISCHARGE			
	Location	LOCAL			
	P&I n.	312002_026			
	Fluid	POLYMER			
	State	SOLYD			
	Condition	Normal Pressure	Barg	28	
		Normal DP	Barg	38	
		Max Pressure	Barg	40	
		Normal Temp.	°C	20	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3	400 (Polymer)	
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1½"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA(PTFE OR Carbographte)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. :	of


Pneumatic Piston+Cylinder Actuator	Type of Actuator	NA		
	Actuator size	NA		
	Actuator ANGLE (torque)	NA		
	Acting = Spring Return or Double Acting Type	NA		
	Air supply press.	Barg	NA	
	On Air Failure	NA		
	Manual Hand-Wheel + Declutched or Side type	Manual Hand-Wheel		
	Body material	NA		
	Valve position monitor	NA		
	Air filter regulator + Supply & output pressure gauge	NA		
	MANUFACTURER	NA		
	MODEL no.	NA		
	Ordering code information	NA		
	accessary	NA		
	Solenoid	Solenoid Valve Type	NA	
Power Supply V DC		NA		
ENCLOSURE PROTECTION		NA		
Mounting Position (Remote version or compact)		NA		
single actuated with spring return mechanism		NA		
double actuated with two locking positions		NA		
On Power Failure		NA		
Threaded connection Size		NA		
Degree of protection		NA		
Output current (mA)		NA		
Electrical connection		NA		
MANUFACTURER		NA		
Ordering code information		NA		
accessary	NA			
Limit Switch Or Proximity Sensor	Type	Quantity	Proximity Sensor - Namur	1 = For close
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	Safety Barrier		


Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 2653			
	Service	NIT to HV2602			
	Location	LOCAL			
	P&I n.	312002_026			
	Fluid	NITROGEN			
	State	GAS			
	Condition	Normal Pressure	Barg	5	
		Normal DP	Barg	38	
		Max Pressure	Barg	40	
		Normal Temp.	°C	AMB (1)	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1/2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
SEAL	VTA(PTFE OR Carbographte)				
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Pneumatic Piston+Cylinder Actuator	Type of Actuator	NA			
	Actuator size	NA			
	Actuator ANGLE (torque)	NA			
	Acting = Spring Return or Double Acting Type	NA			
	Air supply press. Barg	NA			
	On Air Failure	NA			
	Manual Hand-Wheel + Declutched or Side type	Manual Hand-Wheel			
	Body material	NA			
	Valve position monitor	NA			
	Air filter regulator + Supply & output pressure gauge	NA			
	MANUFACTURER	NA			
	MODEL no.	NA			
	Ordering code information	NA			
	accessary	NA			
Solenoid	Solenoid Valve Type	NA			
	Power Supply V DC	NA			
	ENCLOSURE PROTECTION	NA			
	Mounting Position (Remote version or compact)	NA			
	single actuated with spring return mechanism	NA			
	double actuated with two locking positions	NA			
	On Power Failure	NA			
	Threaded connection Size	NA			
	Degree of protection	NA			
	Output current (mA)	NA			
	Electrical connection	NA			
	MANUFACTURER	NA			
	Ordering code information	NA			
	accessary	NA			
Limit Switch Or Proximity Sensor	Type	Quantity	Proximity Sensor - Namur	1 = For close	
	Power Supply V DC	8 V DC			
	ENCLOSURE PROTECTION	EE xia , IIC , T6			
	Degree of protection	IP 65			
	Electrical connection	M20 & 1.5			
	MANUFACTURER	VTA			
	Ordering code information	VTA			
	accessary	Safety Barrier			


Date	Status	Prepared	Checked		Approved


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 2654			
	Service	NIT to CY 261			
	Location	LOCAL			
	P&I n.	312002_026			
	Fluid	NITROGEN			
	State	GAS			
	Condition	Normal Pressure	Barg	5	
		Normal DP	Barg	38	
		Max Pressure	Barg	45	
		Normal Temp.	°C	AMB (2)	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1/2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA(PTFE OR Carbographte)			
	MANUFACTURER	VTA			
	MODEL no.	VTA			
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

	PROJECT: PP-PE PILOT PLANT	 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
	DATA SHEET FOR ON/OFF VALVE	
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. :	of

Pneumatic Piston+Cylinder Actuator	Type of Actuator	NA		
	Actuator size	NA		
	Actuator ANGLE (torque)	NA		
	Acting = Spring Return or Double Acting Type	NA		
	Air supply press.	Barg	NA	
	On Air Failure	NA		
	Manual Hand-Wheel + Declutched or Side type	Manual Hand-Wheel		
	Body material	NA		
	Valve position monitor	NA		
	Air filter regulator + Supply & output pressure gauge	NA		
	MANUFACTURER	NA		
	MODEL no.	NA		
	Ordering code information	NA		
	accessary	NA		
Solenoid	Solenoid Valve Type	NA		
	Power Supply V DC	NA		
	ENCLOSURE PROTECTION	NA		
	Mounting Position (Remote version or compact)	NA		
	single actuated with spring return mechanism	NA		
	double actuated with two locking positions	NA		
	On Power Failure	NA		
	Threaded connection Size	NA		
	Degree of protection	NA		
	Output current (mA)	NA		
	Electrical connection	NA		
	MANUFACTURER	NA		
	Ordering code information	NA		
	accessary	NA		
Limit Switch Or Proximity Sensor	Type	Quantity	Proximity Sensor - Namur	1 = For close
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	Safety Barrier		

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 3401			
	Sevice	HCL to TK 341			
	Location	TK 341			
	P&I n.	312002_034			
	Fluid	HEXENE			
	State	LIQUID			
	Condition	Normal Pressure	Barg	3	
		Normal DP	Barg	5	
		Max Pressure	Barg	10	
		Normal Temp.	°C	AMB (1)	
		Max. Temp.	°C	-60 +120	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1"			
	Rating	ANSI #150			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. :	of

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder	
	Actuator size	VTA	
	Actuator ANGLE (torque)	0° - 90°	
	Acting = Spring Return or Double Acting Type	Spring Return (SINGOL ACTION)	
	Air supply press. Barg	6	
	On Air Failure	CLOSE	
	Hand wheel + Declutched or Side type	NO	
	Body material	VTA (lightweight or Aluminium Body)	
	Valve position monitor	YES	
	Air filter regulator + Supply & output pressure gauge	YES	
	MANUFACTURER	VTA	
	MODEL no.	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Solenoid	Solenoid Valve Type	3-way solenoid valve	
	Power Supply V DC	24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION	EE xia , IIC , T6	
	Mounting Position (Remote version or compact)	Remote version (conection with tube)	
	single actuated with spring return mechanism	YES	
	double actuated with two locking positions	NO	
	On Power Failure	open ways actuator and exhaust and air inside actuator discharges	
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4	
	Degree of protection	IP 65 with filter check valve	
	Output current (mA)	≥ 1.6 mA	
	Electrical connection	M20 & 1.5	
	MANUFACTURER	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	1 = For close
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی

شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

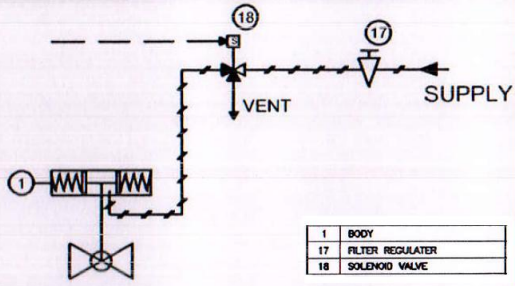

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item		HV 4101		
	Service		R411 to HP 421		
	Location		R411 (P10)		
	P&I n.		312002_041		
	Quantity		2		
	Fluid		POLIMER		
	State		SOLID WITH GAS		
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type		FULL BORE BALL VALVE - Flanged - Raised Face		
	Size		1"		
	Rating		ANSI #300		
	Fire Safe Seat		YES		
	Body material + Trim Material + stem Material		forged S.Steel 316		
	Valve Seat		Metal to metal seated valves		
	Valve Seat material		316 SS		
	SEAL		VTA (PTFE OR Carbographte)		
	MANUFACTURER		VTA		
MODEL no.		VTA			
Ordering code information		VTA			
Certificates & Calibration		pressure test, inspection certificate-Works			
accessary		Marking(Tagging)			

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. :	of

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder	
	Actuator size	VTA	
	Actuator ANGLE (torque)	0° - 90°	
	Acting = Spring Return or Double Acting Type	Double Acting Type	
	Air supply press. Barg	6	
	On Air Failure	LAST POSITION	
	Hand wheel + Declutched or Side type	NO	
	Body material	VTA (lightweight or Aluminium Body)	
	Valve position monitor	YES	
	Air filter regulator + Supply & output pressure gauge	YES	
	MANUFACTURER	VTA	
	MODEL no.	VTA	
	Ordering code information	VTA	
accessary	Marking(Tagging)		

Solenoid	Solenoid Valve Type	5-way solenoid valve	
	Power Supply V DC	24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION	EE xia , IIC , T6	
	Mounting Position (Remote version or copmact)	Remote version (conection with tube)	
	single actuated with spring return mechanism	YES	
	double actuated with two locking positions	NO	
	On Power Failure	OPEN THE AIRE TO ACTUATOR WAY AND CLOSE THE HV-4101	
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4	
	Degree of protection	IP 65 with filter check valve	
	Output current (mA)	≥ 1.6 mA	
	Electrical connection	M20 & 1.5	
	MANUFACTURER	VTA	
	Ordering code information	VTA	
accessary	Marking(Tagging)		

Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی


شرکت پژوهش و فناوری پتروشیمی

Contractor Job No:


Doc. No:


Owner Job No:

Sheet No. : of

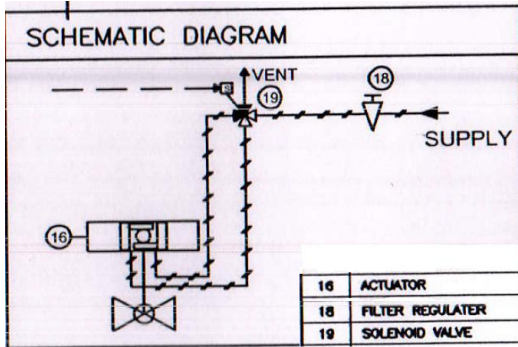

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4102			
	Sevice	GAS to R 411			
	Location	R411 (P13)			
	P&I n.	312002_041			
	Quantity	2			
	Fluid	MONOMERS			
	State	GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	WAFER BUTERFLY VALVE RAISED FACE			
	Size	6"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
	MANUFACTURER	VTA			
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. :	of

Pneumatic Piston+Cylinder Actuator	Type of Actuator		Pneumatic Piston+Cylinder	
	Actuator size		VTA	
	Actuator ANGLE (torque)		0° - 90°	
	Acting = Spring Return or Double Acting Type		Double Acting Type	
	Air supply press .	Barg	6	
	On Air Failure		LAST POSITION	
	Hand wheel + Declutched or Side type		NO	
	Body material		VTA (lightweight or Aluminium Body)	
	Valve position monitor		YES	
	Air filter regulator + Supply & output pressure gauge		YES	
	MANUFACTURER		VTA	
	MODEL no.		VTA	
	Ordering code information		VTA	
	accessary		Marking(Tagging)	
Solenoid	Solenoid Valve Type		5-way solenoid valve	
	Power Supply V DC		24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Mounting Position (Remote version or compact)		Remote version (conection with tube)	
	single actuated with spring return mechanism		YES	
	double actuated with two locking positions		NO	
	On Power Failure		open the aie to actuator and close the HV-4105	
	Threaded connection Size		(NPT) 1/2 or (NPT) 1/4	
	Degree of protection		IP 65 with filter check valve	
	Output current (mA)		≥ 1.6 mA	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		Lock up valve (1/4") Marking(Tagging)	
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC		8 V DC	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Degree of protection		IP 65	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		NA	

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE




شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No:


Doc. No:


Owner Job No:

Sheet No. : of

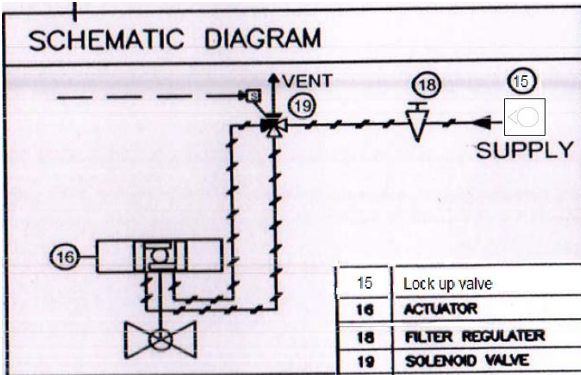

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4103			
	Service	R411 to V 611			
	Location	R411 (P12)			
	P&I n.	312002_041			
	Quantity	2			
	Fluid	POLIMER			
	State	SOLID WITH GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
SEAL	VTA (PTFE OR Carbographte)				
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. : of	

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder		
	Actuator size	VTA		
	Actuator ANGLE (torque)	0° - 90°		
	Acting = Spring Return or Double Acting Type	Double Acting Type		
	Air supply press.	Barg	6	
	On Air Failure	LAST POSITION		
	Hand wheel + Declutched or Side type	NO		
	Body material	VTA (lightweight or Aluminium Body)		
	Valve position monitor	YES		
	Air filter regulator + Supply & output pressure gauge	YES		
	MANUFACTURER	VTA		
	MODEL no.	VTA		
	Ordering code information	VTA		
	accessary	Marking(Tagging)		

Solenoid	Solenoid Valve Type	5-way solenoid valve	
	Power Supply V DC	24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION	EE xia , IIC , T6	
	Mounting Position (Remote version or compact)	Remote version (conection with tube)	
	single actuated with spring return mechanism	YES	
	double actuated with two locking positions	NO	
	On Power Failure	open the aie to actuator and close the HV-4103	
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4	
	Degree of protection	IP 65 with filter check valve	
	Output current (mA)	≥ 1.6 mA	
	Electrical connection	M20 & 1.5	
	MANUFACTURER	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی

شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

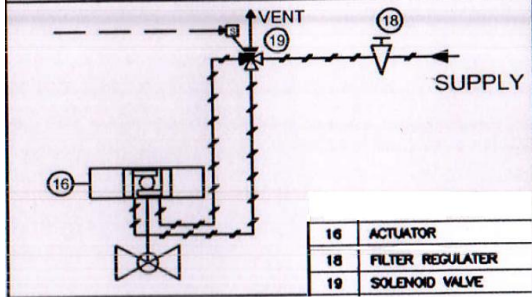

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item		HV 4105		
	Service		R411 to CY 412		
	Location		R411 (P9)		
	P&I n.		312002_041		
	Quantity		2		
	Fluid		POLIMER		
	State		SOLID WITH GAS		
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type		FULL BORE BALL VALVE - Flanged - Raised Face		
	Size		1"		
	Rating		ANSI #300		
	Fire Safe Seat		YES		
	Body material + Trim Material + stem Material		forged S.Steel 316		
	Valve Seat		Metal to metal seated valves		
Valve Seat material		316 SS			
SEAL		VTA (PTFE OR Carbographe)			
MANUFACTURER		VTA			
MODEL no.		VTA			
Ordering code information		VTA			
Certificates & Calibration		pressure test, inspection certificate-Works			
accessary		Marking(Tagging)			

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. : of	

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder		
	Actuator size	VTA		
	Actuator ANGLE (torque)	0° - 90°		
	Acting = Spring Return or Double Acting Type	Double Acting Type		
	Air supply press.	Barg	6	
	On Air Failure	LAST POSITION		
	Hand wheel + Decoupled or Side type	NO		
	Body material	VTA (lightweight or Aluminium Body)		
	Valve position monitor	YES		
	Air filter regulator + Supply & output pressure gauge	YES		
	MANUFACTURER	VTA		
	MODEL no.	VTA		
	Ordering code information	VTA		
	accessary	Marking(Tagging)		

Solenoid	Solenoid Valve Type	5-way solenoid valve	
	Power Supply V DC	24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION	EE xia , IIC , T6	
	Mounting Position (Remote version or compact)	Remote version (conection with tube)	
	single actuated with spring return mechanism	YES	
	double actuated with two locking positions	NO	
	On Power Failure	open the aie to actuator and close the HV-4105	
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4	
	Degree of protection	IP 65 with filter check valve	
	Output current (mA)	≥ 1.6 mA	
	Electrical connection	M20 & 1.5	
	MANUFACTURER	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

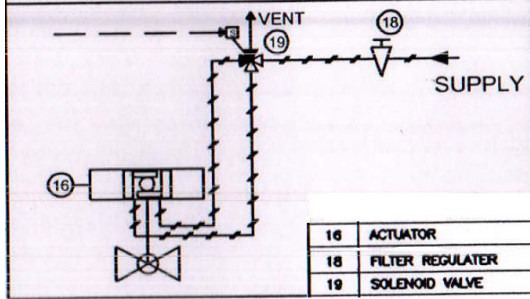


Date	Status	Prepared	Checked		Approved


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4151			
	Service	CY 412 to BDG			
	Location	LOCAL			
	P&I n.	312002_041			
	Quantity	2			
	Fluid	MONOMER			
	State	GAS			
	Condition	Normal Pressure	Barg	25	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	40	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3	1+45	
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
	MANUFACTURER	VTA			
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. :	of

Pneumatic Piston+Cylinder Actuator	Type of Actuator	NA		
	Actuator size	NA		
	Actuator ANGLE (torque)	NA		
	Acting = Spring Return or Double Acting Type	NA		
	Air supply press.	Barg	NA	
	On Air Failure	NA		
	Manual Hand-Wheel + Declutched or Side type	Manual Hand-Wheel		
	Body material	NA		
	Valve position monitor	NA		
	Air filter regulator + Supply & output pressure gauge	NA		
	MANUFACTURER	NA		
	MODEL no.	NA		
	Ordering code information	NA		
	accessary	NA		
	Solenoid	Solenoid Valve Type	NA	
Power Supply V DC		NA		
ENCLOSURE PROTECTION		NA		
Mounting Position (Remote version or compact)		NA		
single actuated with spring return mechanism		NA		
double actuated with two locking positions		NA		
On Power Failure		NA		
Threaded connection Size		NA		
Degree of protection		NA		
Output current (mA)		NA		
Electrical connection		NA		
MANUFACTURER		NA		
Ordering code information		NA		
accessary	NA			
Limit Switch Or Proximity Sensor	Type	Quantity	Proximity Sensor - Namur	1 = For close
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	Safety Barrier		


Date	Status	Prepared	Checked		Approved


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4152			
	Service	CY 412 DISCHARGE			
	Location	LOCAL			
	P&I n.	312002_041			
	Quantity	2			
	Fluid	POLYMER			
	State	SOLYD			
	Condition	Normal Pressure	Barg	25	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	50	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3	400 (Polymer)	
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1½"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
	MANUFACTURER	VTA			
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. :	of

Pneumatic Piston+Cylinder Actuator	Type of Actuator	NA		
	Actuator size	NA		
	Actuator ANGLE (torque)	NA		
	Acting = Spring Return or Double Acting Type	NA		
	Air supply press. Barg	NA		
	On Air Failure	NA		
	Manual Hand-Wheel + Declutched or Side type	Manual Hand-Wheel		
	Body material	NA		
	Valve position monitor	NA		
	Air filter regulator + Supply & output pressure gauge	NA		
	MANUFACTURER	NA		
	MODEL no.	NA		
	Ordering code information	NA		
	accessary	NA		
	Solenoid	Solenoid Valve Type	NA	
Power Supply V DC		NA		
ENCLOSURE PROTECTION		NA		
Mounting Position (Remote version or compact)		NA		
single actuated with spring return mechanism		NA		
double actuated with two locking positions		NA		
On Power Failure		NA		
Threaded connection Size		NA		
Degree of protection		NA		
Output current (mA)		NA		
Electrical connection		NA		
MANUFACTURER		NA		
Ordering code information		NA		
accessary	NA			
Limit Switch Or Proximity Sensor	Type	Quantity	Proximity Sensor - Namur	1 = For close
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	Safety Barrier		

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item		HV 4153		
	Service		CY 412 DISCHARGE		
	Location		LOCAL		
	P&I n.		312002_041		
	Quantity		2		
	Fluid		POLYMER		
	State		SOLYD		
	Condition	Normal Pressure	Barg	25	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	50	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3	6.8	
		Liquid	Kg/m3	400 (Polymer)	
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type		WAFER FULL BORE - Raised Face		
	Size		1½"		
	Rating		ANSI #300		
	Fire Safe Seat		YES		
	Body material + Trim Material + stem Material		forged S.Steel 316		
	Valve Seat		Metal to metal seated valves		
	Valve Seat material		316 SS		
	SEAL		VTA (PTFE OR Carbographe)		
	MANUFACTURER		VTA		
MODEL no.		VTA			
Ordering code information		VTA			
Certificates & Calibration		pressure test, inspection certificate-Works			
accessary		Marking(Tagging)			

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. :	of

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder	
	Actuator size	VTA	
	Actuator ANGLE (torque)	0° - 90°	
	Acting = Spring Return or Double Acting Type	Double Acting Type	
	Air supply press. Barg	6	
	On Air Failure	LAST POSITION	
	Hand wheel + Declutched or Side type	NO	
	Body material	VTA (lightweight or Aluminium Body)	
	Valve position monitor	YES	
	Air filter regulator + Supply & output pressure gauge	YES	
	MANUFACTURER	VTA	
	MODEL no.	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

PULL VALVE MANUAL VALVE	PULL VALVE MANUAL VALVE TYPE	5-port 2 position pneumatic air hand control valve	
	Power Supply V DC	it is not electrical and it works with pneumatic air	
	ENCLOSURE PROTECTION	-----	
	Mounting Position (Remote version or compact)	Remote version (conection with tube)	
	single actuated with spring return mechanism	NO	
	double actuated with two locking positions	YES	
	On Power Failure	-----	
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4 or 1/8	
	Degree of protection	IP 65 with filter check valve	
	Output current (mA)	-----	
	Electrical connection	-----	
	MANUFACTURER	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	1 = For close
	Power Supply V DC		8 V DC	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Degree of protection		IP 65	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		NA	

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی

شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

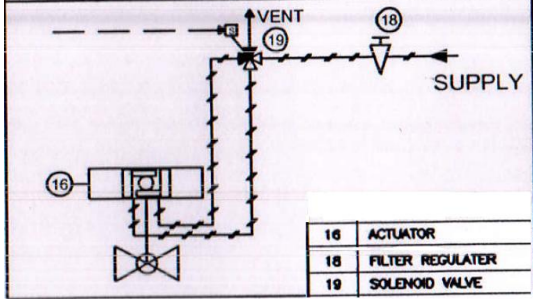


Date	Status	Prepared	Checked		Approved


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4154			
	Service	NIT to CY 412			
	Location	LOCAL			
	P&I n.	312002_041			
	Quantity	2			
	Fluid	NITROGEN			
	State	GAS			
	Condition	Normal Pressure	Barg	5	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	AMB (2)	
		Max. Temp.	°C	-60 +120	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3	6.8	
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1/2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
	MANUFACTURER	VTA			
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

	PROJECT: PP-PE PILOT PLANT	 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
	DATA SHEET FOR ON/OFF VALVE	
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. : of	

Pneumatic Piston+Cylinder Actuator	Type of Actuator	NA		
	Actuator size	NA		
	Actuator ANGLE (torque)	NA		
	Acting = Spring Return or Double Acting Type	NA		
	Air supply press. Barg	NA		
	On Air Failure	NA		
	Manual Hand-Wheel + Declutched or Side type	Manual Hand-Wheel		
	Body material	NA		
	Valve position monitor	NA		
	Air filter regulator + Supply & output pressure gauge	NA		
	MANUFACTURER	NA		
	MODEL no.	NA		
	Ordering code information	NA		
	accessary	NA		
	Solenoid	Solenoid Valve Type	NA	
Power Supply V DC		NA		
ENCLOSURE PROTECTION		NA		
Mounting Position (Remote version or compact)		NA		
single actuated with spring return mechanism		NA		
double actuated with two locking positions		NA		
On Power Failure		NA		
Threaded connection Size		NA		
Degree of protection		NA		
Output current (mA)		NA		
Electrical connection		NA		
MANUFACTURER		NA		
Ordering code information		NA		
accessary	NA			
Limit Switch Or Proximity Sensor	Type	Quantity	Proximity Sensor - Namur	1 = For close
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	Safety Barrier		

Date	Status	Prepared	Checked		Approved


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4201			
	Service	R421 to V611			
	Location	R421 (P12)			
	P&I n.	312002_042			
	Fluid	POLIMER			
	State	SOLID WITH GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp.Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1½"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA(PTFE OR Carbographte)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت علی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No.:	of


Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder		
	Actuator size	VTA		
	Actuator ANGLE (torque)	0° - 90°		
	Acting = Spring Return or Double Acting Type	Double Acting Type		
	Air supply press.	Barg	6	
	On Air Failure	LAST POSITION		
	Hand wheel + Declutched or Side type	NO		
	Body material	VTA (lightweight or Aluminium Body)		
	Valve position monitor	YES		
	Air filter regulator + Supply & output pressure gauge	YES		
	MANUFACTURER	VTA		
	MODEL no.	VTA		
	Ordering code information	VTA		
accessary	Marking(Tagging)			


Solenoid	Solenoid Valve Type	5-way solenoid valve		
	Power Supply V DC	24 V DC, power consumption 26.71 mW		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Mounting Position (Remote version or compact)	Remote version (conection with tube)		
	single actuated with spring return mechanism	YES		
	double actuated with two locking positions	NO		
	On Power Failure	OPEN THE AIRE TO ACTUATOR WAY AND CLOSE THE HV-4201		
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4		
	Degree of protection	IP 65 with filter check valve		
	Output current (mA)	≥ 1.6 mA		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
accessary	Marking(Tagging)			

Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

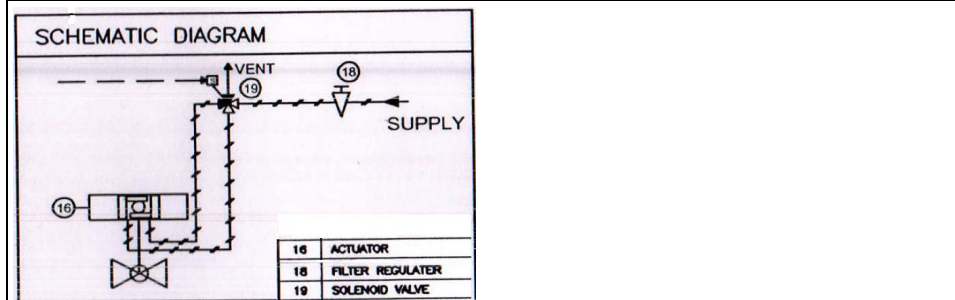

Date	Status	Prepared	Checked	Approved	

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4202			
	Service	GAS to R 421			
	Location	R421 (P14)			
	P&I n.	312002_042			
	Fluid	MONOMERS			
	State	GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	WAFER BUTERFLY VALVE RAISED FACE			
	Size	8"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
SEAL	VTA(PTFE OR Carbographte)				
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
		DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	Owner Job No:	Sheet No. : of	
Pneumatic Piston+Cylinder Actuator	Type of Actuator		Pneumatic Piston+Cylinder	
	Actuator size		VTA	
	Actuator ANGLE (torque)		0° - 90°	
	Acting = Spring Return or Double Acting Type		Double Acting Type	
	Air supply press . Barg		6	
	On Air Failure		LAST POSITION	
	Hand wheel + Declutched or Side type		NO	
	Body material		VTA (lightweight or Aluminium Body)	
	Valve position monitor		YES	
	Air filter regulator + Supply & output pressure gauge		YES	
	MANUFACTURER		VTA	
	MODEL no.		VTA	
	Ordering code information		VTA	
	accessary		Marking(Tagging)	
Solenoid	Solenoid Valve Type		5-way solenoid valve	
	Power Supply V DC		24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Mounting Position (Remote version or compact)		Remote version (conection with tube)	
	single actuated with spring return mechanism		YES	
	double actuated with two locking positions		NO	
	On Power Failure		open the aie to actuator and close the HV-4202	
	Threaded connection Size		(NPT) 1/2 or (NPT) 1/4	
	Degree of protection		IP 65 with filter check valve	
	Output current (mA)		≥ 1.6 mA	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		Lock up valve (1/4") Marking(Tagging)	
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC		8 V DC	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Degree of protection		IP 65	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		NA	

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

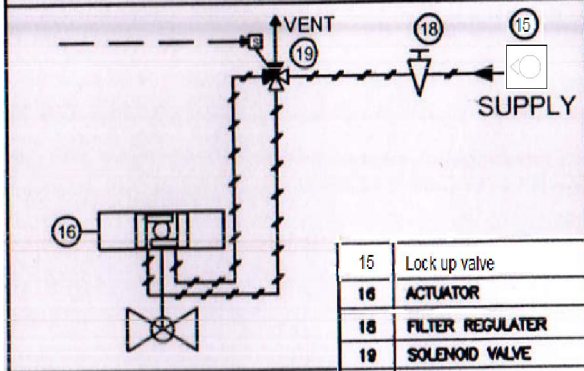

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4203			
	Sevice	R421 to HP422			
	Location	R421 (F9)			
	P&I n.	312002_042			
	Fluid	POLIMER			
	State	SOLID WITH GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
	MANUFACTURER	VTA			
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
		DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:		Doc. No:		
Owner Job No:		Sheet No. : of		
Pneumatic Piston+Cylinder Actuator	Type of Actuator		Pneumatic Piston+Cylinder	
	Actuator size		VTA	
	Actuator ANGLE (torque)		0° - 90°	
	Acting = Spring Return or Double Acting Type		Double Acting Type	
	Air supply press. Barg		6	
	On Air Failure		LAST POSITION	
	Hand wheel + Declutched or Side type		NO	
	Body material		VTA (lightweight or Aluminium Body)	
	Valve position monitor		YES	
	Air filter regulator + Supply & output pressure gauge		YES	
	MANUFACTURER		VTA	
	MODEL no.		VTA	
	Ordering code information		VTA	
	accessary		Marking(Tagging)	
Solenoid	Solenoid Valve Type		5-way solenoid valve	
	Power Supply V DC		24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Mounting Position (Remote version or compact)		Remote version (connection with tube)	
	single actuated with spring return mechanism		YES	
	double actuated with two locking positions		NO	
	On Power Failure		open the air to actuator and close the UV-4203	
	Threaded connection Size		(NPT) 1/2 or (NPT) 1/4	
	Degree of protection		IP 65 with filter check valve	
	Output current (mA)		≥ 1.6 mA	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		Marking(Tagging)	
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC		8 V DC	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Degree of protection		IP 65	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		NA	

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی

شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

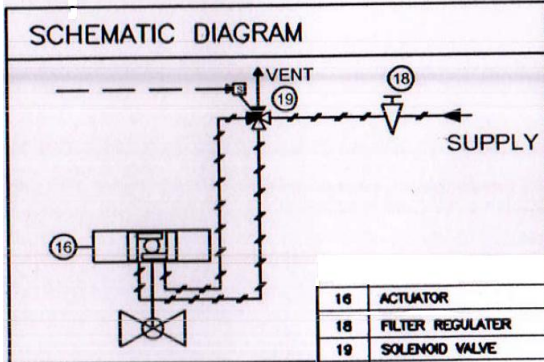

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4204			
	Sevice	R421 to HP423			
	Location	R421 (P10)			
	P&I n.	312002_042			
	Fluid	POLIMER			
	State	SOLID WITH GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
	MANUFACTURER	VTA			
	MODEL no.	VTA			
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. : of	

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder	
	Actuator size	VTA	
	Actuator ANGLE (torque)	0° - 90°	
	Acting = Spring Return or Double Acting Type	Double Acting Type	
	Air supply press. Barg	6	
	On Air Failure	LAST POSITION	
	Hand wheel + Declutched or Side type	NO	
	Body material	VTA (lightweight or Aluminium Body)	
	Valve position monitor	YES	
	Air filter regulator + Supply & output pressure gauge	YES	
	MANUFACTURER	VTA	
	MODEL no.	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Solenoid	Solenoid Valve Type	5-way solenoid valve	
	Power Supply V DC	24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION	EE xia , IIC , T6	
	Mounting Position (Remote version or compact)	Remote version (conection with tube)	
	single actuated with spring return mechanism	YES	
	double actuated with two locking positions	NO	
	On Power Failure	open the aie to actuator and close the HV-4204	
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4	
	Degree of protection	IP 65 with filter check valve	
	Output current (mA)	≥ 1.6 mA	
	Electrical connection	M20 & 1.5	
	MANUFACTURER	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی


شرکت پژوهش و فناوری پتروشیمی

Contractor Job No:


Doc. No:


Owner Job No:

Sheet No. : of

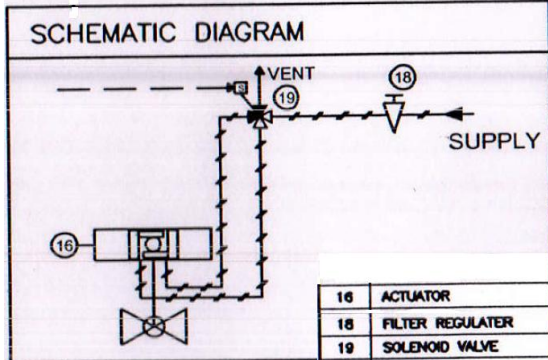

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4206			
	Service	BALANCE HP422 / HP423			
	Location	HP422 / HP 423			
	P&I n.	312002_042			
	Fluid	MONOMER			
	State	GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
	MANUFACTURER	VTA			
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. : of	

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder	
	Actuator size	VTA	
	Actuator ANGLE (torque)	0° - 90°	
	Acting = Spring Return or Double Acting Type	Double Acting Type	
	Air supply press. Barg	6	
	On Air Failure	LAST POSITION	
	Hand wheel + Declutched or Side type	NO	
	Body material	VTA (lightweight or Aluminium Body)	
	Valve position monitor	YES	
	Air filter regulator + Supply & output pressure gauge	YES	
	MANUFACTURER	VTA	
	MODEL no.	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Solenoid	Solenoid Valve Type	5-way solenoid valve	
	Power Supply V DC	24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION	EE xia , IIC , T6	
	Mounting Position (Remote version or compact)	Remote version (conection with tube)	
	single actuated with spring return mechanism	YES	
	double actuated with two locking positions	NO	
	On Power Failure	open the aie to actuator and close the HV-4206	
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4	
	Degree of protection	IP 65 with filter check valve	
	Output current (mA)	≥ 1.6 mA	
	Electrical connection	M20 & 1.5	
	MANUFACTURER	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی

شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

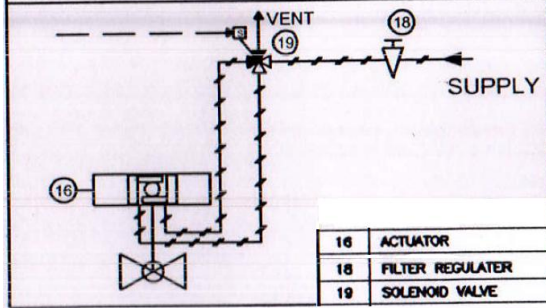

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4207			
	Sevice	HP422 to R421			
	Location	HP 422			
	P&I n.	312002_042			
	Fluid	MONOMER			
	State	GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
		DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:		Doc. No:		
Owner Job No:		Sheet No. : of		
Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder		
	Actuator size	VTA		
	Actuator ANGLE (torque)	0° - 90°		
	Acting = Spring Return or Double Acting Type	Double Acting Type		
	Air supply press. Barg	6		
	On Air Failure	LAST POSITION		
	Hand wheel + Declutched or Side type	NO		
	Body material	VTA (lightweight or Aluminium Body)		
	Valve position monitor	YES		
	Air filter regulator + Supply & output pressure gauge	YES		
	MANUFACTURER	VTA		
	MODEL no.	VTA		
	Ordering code information	VTA		
	accessary	Marking(Tagging)		
Solenoid	Solenoid Valve Type	5-way solenoid valve		
	Power Supply V DC	24 V DC, power consumption 26.71 mW		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Mounting Position (Remote version or compact)	Remote version (connection with tube)		
	single actuated with spring return mechanism	YES		
	double actuated with two locking positions	NO		
	On Power Failure	open the aie to actuator and close the HV-4207		
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4		
	Degree of protection	IP 65 with filter check valve		
	Output current (mA)	≥ 1.6 mA		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	Marking(Tagging)		
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

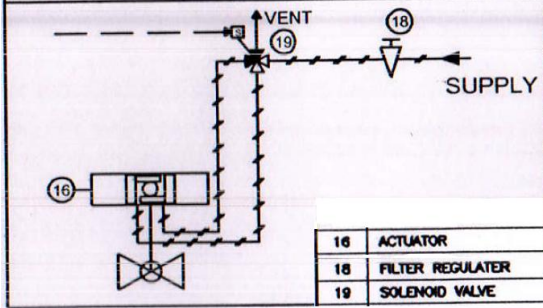

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4208			
	Sevice	HP423 to R421			
	Location	HP423			
	P&I n.	312002_042			
	Fluid	MONOMER			
	State	GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. :	of

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder	
	Actuator size	VTA	
	Actuator ANGLE (torque)	0° - 90°	
	Acting = Spring Return or Double Acting Type	Double Acting Type	
	Air supply press. Barg	6	
	On Air Failure	LAST POSITION	
	Hand wheel + Declutched or Side type	NO	
	Body material	VTA (lightweight or Aluminium Body)	
	Valve position monitor	YES	
	Air filter regulator + Supply & output pressure gauge	YES	
	MANUFACTURER	VTA	
	MODEL no.	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Solenoid	Solenoid Valve Type	5-way solenoid valve	
	Power Supply V DC	24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION	EE xia , IIC , T6	
	Mounting Position (Remote version or compact)	Remote version (conection with tube)	
	single actuated with spring return mechanism	YES	
	double actuated with two locking positions	NO	
	On Power Failure	open the aie to actuator and close the HV-4208	
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4	
	Degree of protection	IP 65 with filter check valve	
	Output current (mA)	≥ 1.6 mA	
	Electrical connection	M20 & 1.5	
	MANUFACTURER	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:

Sheet No. : of

SCHEMATIC DIAGRAM

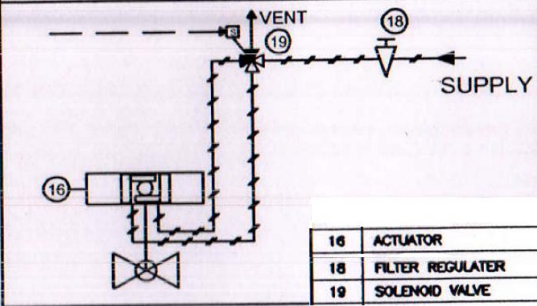

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4209			
	Sevice	HP422 to V611			
	Location	HP422 (P3)			
	P&I n.	312002_042			
	Fluid	POLIMER			
	State	SOLID WITH GAS			
	Condition	Normal Pressure	Barg	12	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	WAFER FULL BORE VALVE - Raised Face			
	Size	2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
	MANUFACTURER	VTA			
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No:

Doc. No:

Owner Job No:

Sheet No. : of

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder		
	Actuator size	VTA		
	Actuator ANGLE (torque)	0° - 90°		
	Acting = Spring Return or Double Acting Type	Double Acting Type		
	Air supply press.	Barg	6	
	On Air Failure	LAST POSITION		
	Hand wheel + Declutched or Side type	NO		
	Body material	VTA (lightweight or Aluminium Body)		
	Valve position monitor	YES		
	Air filter regulator + Supply & output pressure gauge	YES		
	MANUFACTURER	VTA		
	MODEL no.	VTA		
	Ordering code information	VTA		
	accessary	Marking(Tagging)		
Solenoid	Solenoid Valve Type	5-way solenoid valve		
	Power Supply V DC	24 V DC, power consumption 26.71 mW		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Mounting Position (Remote version or compact)	Remote version (conection with tube)		
	single actuated with spring return mechanism	YES		
	double actuated with two locking positions	NO		
	On Power Failure	open the aie to actuator and close the HV-4209		
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4		
	Degree of protection	IP 65 with filter check valve		
	Output current (mA)	≥ 1.6 mA		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	Marking(Tagging)		
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی

شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:

Sheet No. : of

SCHEMATIC DIAGRAM

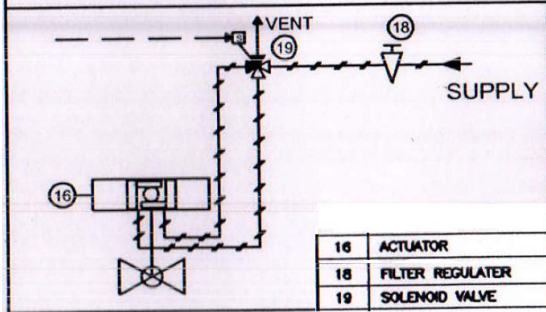

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4210			
	Sevice	HP423 to V611			
	Location	HP423 (P3)			
	P&I n.	312002_042			
	Fluid	POLIMER			
	State	SOLID WITH GAS			
	Condition	Normal Pressure	Barg	12	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	WAFER FULL BORE VALVE - Raised Face			
	Size	2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
	MANUFACTURER	VTA			
	MODEL no.	VTA			
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No:

Doc. No:

Owner Job No:

Sheet No. : of

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder		
	Actuator size	VTA		
	Actuator ANGLE (torque)	0° - 90°		
	Acting = Spring Return or Double Acting Type	Double Acting Type		
	Air supply press.	Barg	6	
	On Air Failure	LAST POSITION		
	Hand wheel + Declatched or Side type	NO		
	Body material	VTA (lightweight or Aluminium Body)		
	Valve position monitor	YES		
	Air filter regulator + Supply & output pressure gauge	YES		
	MANUFACTURER	VTA		
	MODEL no.	VTA		
	Ordering code information	VTA		
	accessary	Marking(Tagging)		
Solenoid	Solenoid Valve Type	5-way solenoid valve		
	Power Supply V DC	24 V DC, power consumption 26.71 mW		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Mounting Position (Remote version or compact)	Remote version (conection with tube)		
	single actuated with spring return mechanism	YES		
	double actuated with two locking positions	NO		
	On Power Failure	open the aie to actuator and close the HV-4210		
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4		
	Degree of protection	IP 65 with filter check valve		
	Output current (mA)	≥ 1.6 mA		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	Marking(Tagging)		
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی

شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

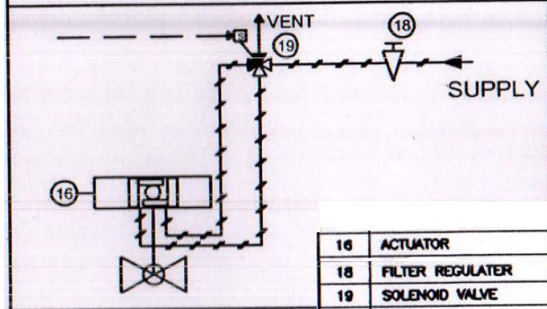

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4211			
	Sevice	R421 to CY422			
	Location	R421 (P11)			
	P&I n.	312002_042			
	Fluid	POLIMER			
	State	SOLID WITH GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
	MANUFACTURER	VTA			
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. :	of

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder	
	Actuator size	VTA	
	Actuator ANGLE (torque)	0° - 90°	
	Acting = Spring Return or Double Acting Type	Double Acting Type	
	Air supply press. Barg	6	
	On Air Failure	LAST POSITION	
	Hand wheel + Declutched or Side type	NO	
	Body material	VTA (lightweight or Aluminium Body)	
	Valve position monitor	YES	
	Air filter regulator + Supply & output pressure gauge	YES	
	MANUFACTURER	VTA	
	MODEL no.	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Solenoid	Solenoid Valve Type	5-way solenoid valve	
	Power Supply V DC	24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION	EE xia , IIC , T6	
	Mounting Position (Remote version or compact)	Remote version (conection with tube)	
	single actuated with spring return mechanism	YES	
	double actuated with two locking positions	NO	
	On Power Failure	open the aie to actuator and close the HV-4211	
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4	
	Degree of protection	IP 65 with filter check valve	
	Output current (mA)	≥ 1.6 mA	
	Electrical connection	M20 & 1.5	
	MANUFACTURER	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی

شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

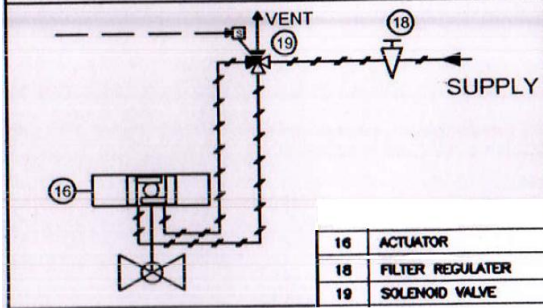

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4212			
	Sevice	HP421 to R421			
	Location	HP421 (P3)			
	P&I n.	312002_042			
	Fluid	POLIMER			
	State	SOLID WITH GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
	MANUFACTURER	VTA			
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. :	of

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder	
	Actuator size	VTA	
	Actuator ANGLE (torque)	0° - 90°	
	Acting = Spring Return or Double Acting Type	Double Acting Type	
	Air supply press. Barg	6	
	On Air Failure	LAST POSITION	
	Hand wheel + Declutched or Side type	NO	
	Body material	VTA (lightweight or Aluminium Body)	
	Valve position monitor	YES	
	Air filter regulator + Supply & output pressure gauge	YES	
	MANUFACTURER	VTA	
	MODEL no.	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Solenoid	Solenoid Valve Type	5-way solenoid valve	
	Power Supply V DC	24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION	EE xia , IIC , T6	
	Mounting Position (Remote version or compact)	Remote version (conection with tube)	
	single actuated with spring return mechanism	YES	
	double actuated with two locking positions	NO	
	On Power Failure	open the aie to actuator and close the HV-4212	
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4	
	Degree of protection	IP 65 with filter check valve	
	Output current (mA)	≥ 1.6 mA	
	Electrical connection	M20 & 1.5	
	MANUFACTURER	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:

Sheet No. : of

SCHEMATIC DIAGRAM

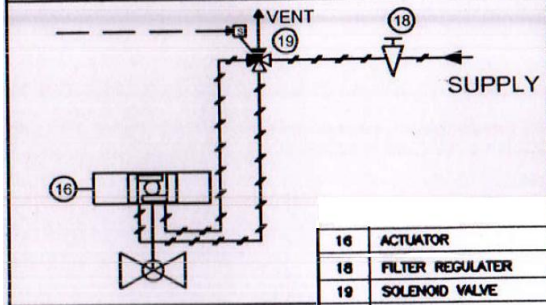

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4213			
	Service	HP421 INLET			
	Location	HP421 (P2)			
	P&I n.	312002_042			
	Fluid	POLIMER			
	State	SOLID WITH GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
	MANUFACTURER	VTA			
	MODEL no.	VTA			
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Contractor Job No:

Doc. No:

Owner Job No:

Sheet No. : of

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder		
	Actuator size	VTA		
	Actuator ANGLE (torque)	0° - 90°		
	Acting = Spring Return or Double Acting Type	Double Acting Type		
	Air supply press.	Barg	6	
	On Air Failure	LAST POSITION		
	Hand wheel + Declutched or Side type	NO		
	Body material	VTA (lightweight or Aluminium Body)		
	Valve position monitor	YES		
	Air filter regulator + Supply & output pressure gauge	YES		
	MANUFACTURER	VTA		
	MODEL no.	VTA		
	Ordering code information	VTA		
	accessary	Marking(Tagging)		
Solenoid	Solenoid Valve Type	5-way solenoid valve		
	Power Supply V DC	24 V DC, power consumption 26.71 mW		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Mounting Position (Remote version or compact)	Remote version (conection with tube)		
	single actuated with spring return mechanism	YES		
	double actuated with two locking positions	NO		
	On Power Failure	open the aie to actuator and close the HV-4213		
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4		
	Degree of protection	IP 65 with filter check valve		
	Output current (mA)	≥ 1.6 mA		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	Marking(Tagging)		
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی

شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:

Owner Job No:


Sheet No. : of


SCHEMATIC DIAGRAM

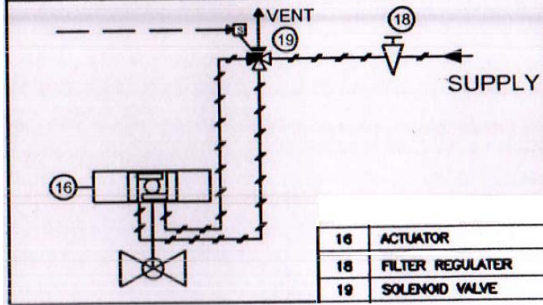

16	ACTUATOR
18	FILTER REGULATOR
19	SOLENOID VALVE

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4214			
	Sevice	CF421 to HP421			
	Location	HP421			
	P&I n.	312002_042			
	Fluid	MONOMER			
	State	GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographte)			
	MANUFACTURER	VTA			
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. : of	

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder	
	Actuator size	VTA	
	Actuator ANGLE (torque)	0° - 90°	
	Acting = Spring Return or Double Acting Type	Double Acting Type	
	Air supply press. Barg	6	
	On Air Failure	LAST POSITION	
	Hand wheel + Declutched or Side type	NO	
	Body material	VTA (lightweight or Aluminium Body)	
	Valve position monitor	YES	
	Air filter regulator + Supply & output pressure gauge	YES	
	MANUFACTURER	VTA	
	MODEL no.	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Solenoid	Solenoid Valve Type	5-way solenoid valve	
	Power Supply V DC	24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION	EE xia , IIC , T6	
	Mounting Position (Remote version or compact)	Remote version (conection with tube)	
	single actuated with spring return mechanism	YES	
	double actuated with two locking positions	NO	
	On Power Failure	open the aie to actuator and close the HV-4214	
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4	
	Degree of protection	IP 65 with filter check valve	
	Output current (mA)	≥ 1.6 mA	
	Electrical connection	M20 & 1.5	
	MANUFACTURER	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی

شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

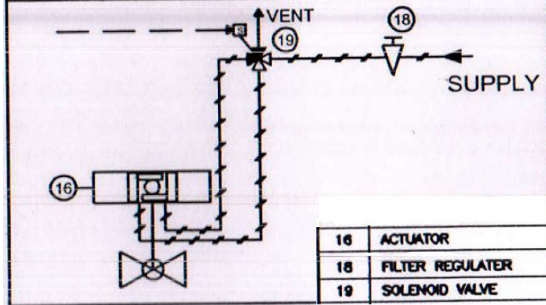

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4215			
	Service	HP421 to BDG			
	Location	HP421			
	P&I n.	312002_042			
	Fluid	MONOMER			
	State	GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographte)			
	MANUFACTURER	VTA			
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. : of	

Pneumatic Piston+Cylinder Actuator	Type of Actuator	Pneumatic Piston+Cylinder	
	Actuator size	VTA	
	Actuator ANGLE (torque)	0° - 90°	
	Acting = Spring Return or Double Acting Type	Double Acting Type	
	Air supply press. Barg	6	
	On Air Failure	LAST POSITION	
	Hand wheel + Declutched or Side type	NO	
	Body material	VTA (lightweight or Aluminium Body)	
	Valve position monitor	YES	
	Air filter regulator + Supply & output pressure gauge	YES	
	MANUFACTURER	VTA	
	MODEL no.	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Solenoid	Solenoid Valve Type	5-way solenoid valve	
	Power Supply V DC	24 V DC, power consumption 26.71 mW	
	ENCLOSURE PROTECTION	EE xia , IIC , T6	
	Mounting Position (Remote version or compact)	Remote version (connection with tube)	
	single actuated with spring return mechanism	YES	
	double actuated with two locking positions	NO	
	On Power Failure	open the aie to actuator and close the HV-4215	
	Threaded connection Size	(NPT) 1/2 or (NPT) 1/4	
	Degree of protection	IP 65 with filter check valve	
	Output current (mA)	≥ 1.6 mA	
	Electrical connection	M20 & 1.5	
	MANUFACTURER	VTA	
	Ordering code information	VTA	
	accessary	Marking(Tagging)	

Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	2 = For close & open
	Power Supply V DC	8 V DC		
	ENCLOSURE PROTECTION	EE xia , IIC , T6		
	Degree of protection	IP 65		
	Electrical connection	M20 & 1.5		
	MANUFACTURER	VTA		
	Ordering code information	VTA		
	accessary	NA		

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی

شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

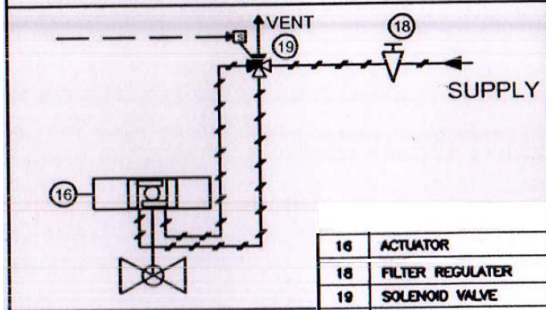



Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4251			
	Sevice	HP422/HP423 to R421			
	Location	CF421 SUCTION			
	P&I n.	312002_042			
	Fluid	MONOMER			
	State	GAS			
	Condition	Normal Pressure	Barg	24	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	80	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA(PTFE OR Carbographte)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Pneumatic Piston+Cylinder Actuator	Type of Actuator	NA			
	Actuator size	NA			
	Actuator ANGLE (torque)	NA			
	Acting = Spring Return or Double Acting Type	NA			
	Air supply press.	Barg	NA		
	On Air Failure	NA			
	Manual Hand-Wheel + Decoupled or Side type	Manual Hand-Wheel			
	Body material	NA			
	Valve position monitor	NA			
	Air filter regulator + Supply & output pressure gauge	NA			
	MANUFACTURER	NA			
	MODEL no.	NA			
	Ordering code information	NA			
	accessary	NA			
Solenoid	Solenoid Valve Type	NA			
	Power Supply V DC	NA			
	ENCLOSURE PROTECTION	NA			
	Mounting Position (Remote version or compact)	NA			
	single actuated with spring return mechanism	NA			
	double actuated with two locking positions	NA			
	On Power Failure	NA			
	Threaded connection Size	NA			
	Degree of protection	NA			
	Output current (mA)	NA			
	Electrical connection	NA			
	MANUFACTURER	NA			
	Ordering code information	NA			
	accessary	NA			
Limit Switch Or Proximity Sensor	Type	Quantity	Proximity Sensor - Namur	2 = For close & open	
	Power Supply V DC	8 V DC			
	ENCLOSURE PROTECTION	EE xia , IIC , T6			
	Degree of protection	IP 65			
	Electrical connection	M20 & 1.5			
	MANUFACTURER	VTA			
	Ordering code information	VTA			
	accessary	two Safety Barrier			


Date	Status	Prepared	Checked		Approved


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4252			
	Service	CY 422 to BDG			
	Location	LOCAL			
	P&I n.	312002_042			
	Fluid	MONOMER			
	State	GAS			
	Condition	Normal Pressure	Barg	25	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	40	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA(PTFE OR Carbographeite)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

	PROJECT: PP-PE PILOT PLANT	 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
	DATA SHEET FOR ON/OFF VALVE	
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. :	of

Pneumatic Piston+Cylinder Actuator	Type of Actuator		NA	
	Actuator size		NA	
	Actuator ANGLE (torque)		NA	
	Acting = Spring Return or Double Acting Type		NA	
	Air supply press. Barg		NA	
	On Air Failure		NA	
	Manual Hand-Wheel + Declutched or Side type		Manual Hand-Wheel	
	Body material		NA	
	Valve position monitor		NA	
	Air filter regulator + Supply & output pressure gauge		NA	
	MANUFACTURER		NA	
	MODEL no.		NA	
	Ordering code information		NA	
	accessary		NA	
Solenoid	Solenoid Valve Type		NA	
	Power Supply V DC		NA	
	ENCLOSURE PROTECTION		NA	
	Mounting Position (Remote version or compact)		NA	
	single actuated with spring return mechanism		NA	
	double actuated with two locking positions		NA	
	On Power Failure		NA	
	Threaded connection Size		NA	
	Degree of protection		NA	
	Output current (mA)		NA	
	Electrical connection		NA	
	MANUFACTURER		NA	
	Ordering code information		NA	
	accessary		NA	
Limit Switch Or Proximity Sensor	Type	Quantity	Proximity Sensor - Namur	1 = For close
	Power Supply V DC		8 V DC	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Degree of protection		IP 65	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		Safety Barrier	


Date	Status	Prepared	Checked		Approved


		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4253			
	Service	CY 422 DISCHARGE			
	Location	LOCAL			
	P&I n.	312002_042			
	Fluid	POLYMER			
	State	SOLYD			
	Condition	Normal Pressure	Barg	25	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	50	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1½"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
SEAL	VTA(PTFE OR Carbographe)				
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

	PROJECT: PP-PE PILOT PLANT	 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
	DATA SHEET FOR ON/OFF VALVE	
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. : of	

Pneumatic Piston+Cylinder Actuator	Type of Actuator		NA	
	Actuator size		NA	
	Actuator ANGLE (torque)		NA	
	Acting = Spring Return or Double Acting Type		NA	
	Air supply press.	Barg	NA	
	On Air Failure		NA	
	Manual Hand-Wheel + Declutched or Side type		Manual Hand-Wheel	
	Body material		NA	
	Valve position monitor		NA	
	Air filter regulator + Supply & output pressure gauge		NA	
	MANUFACTURER		NA	
	MODEL no.		NA	
	Ordering code information		NA	
	accessary		NA	
Solenoid	Solenoid Valve Type		NA	
	Power Supply V DC		NA	
	ENCLOSURE PROTECTION		NA	
	Mounting Position (Remote version or copmact)		NA	
	single actuated with spring return mechanism		NA	
	double actuated with two locking positions		NA	
	On Power Failure		NA	
	Threaded connection Size		NA	
	Degree of protection		NA	
	Output current (mA)		NA	
	Electrical connection		NA	
	MANUFACTURER		NA	
	Ordering code information		NA	
	accessary		NA	
Limit Switch Or Proximity Sensor	Type	Quantity	Proximity Sensor - Namur	1 = For close
	Power Supply V DC		8 V DC	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Degree of protection		IP 65	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		Safety Barrier	

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی	
		DATA SHEET FOR ON/OFF VALVE			
		Contractor Job No:	Doc. No:		
		Owner Job No:	Sheet No. : of		
Valve (HV)	Item	HV 4254			
	Sevice	CY 422 DISCHARGE			
	Location	LOCAL			
	P&I n.	312002_042			
	Fluid	POLYMER			
	State	SOLYD			
	Condition	Normal Pressure	Barg	25	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	50	
		Max. Temp.	°C	-60 +180	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	WAFER FULL BORE - Raised Face			
	Size	1½"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA (PTFE OR Carbographe)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

		PROJECT: PP-PE PILOT PLANT		 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
		DATA SHEET FOR ON/OFF VALVE		
Contractor Job No:		Doc. No:		
Owner Job No:		Sheet No. : of		
Pneumatic Piston+Cylinder Actuator	Type of Actuator		Pneumatic Piston+Cylinder	
	Actuator size		VTA	
	Actuator ANGLE (torque)		0° - 90°	
	Acting = Spring Return or Double Acting Type		Double Acting Type	
	Air supply press. Barg		6	
	On Air Failure		LAST POSITION	
	Hand wheel + Declutched or Side type		NO	
	Body material		VTA (lightweight or Aluminium Body)	
	Valve position monitor		YES	
	Air filter regulator + Supply & output pressure gauge		YES	
	MANUFACTURER		VTA	
	MODEL no.		VTA	
	Ordering code information		VTA	
	accessary		Marking(Tagging)	
PULL VALVE MANUAL VALVE	PULL VALVE MANUAL VALVE TYPE		5-port 2 position pneumatic air hand control valve	
	Power Supply V DC		it is not electrical and it works with pneumatic air	
	ENCLOSURE PROTECTION		-----	
	Mounting Position (Remote version or compact)		Remote version (connection with tube)	
	single actuated with spring return mechanism		NO	
	double actuated with two locking positions		YES	
	On Power Failure		-----	
	Threaded connection Size		(NPT) 1/2 or (NPT) 1/4 or 1/8	
	Degree of protection		IP 65 with filter check valve	
	Output current (mA)		-----	
	Electrical connection		-----	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		Marking(Tagging)	
Limit Switch Or Proximity Sensor	Type	Quantity	Limit Switch	1 = For close
	Power Supply V DC		8 V DC	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Degree of protection		IP 65	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		NA	

PROJECT: PP-PE PILOT PLANT

DATA SHEET FOR ON/OFF VALVE



شرکت ملی صنایع پتروشیمی

شرکت پژوهش و فناوری پتروشیمی


Contractor Job No:

Doc. No:


Owner Job No:


Sheet No. : of

SCHEMATIC DIAGRAM

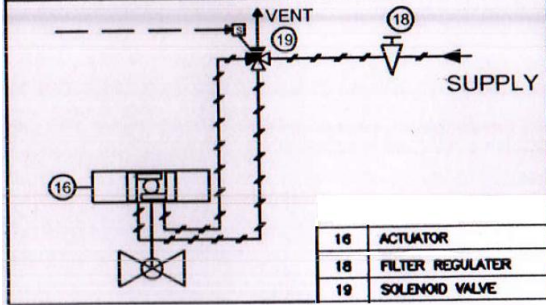

Date	Status	Prepared	Checked		Approved

		PROJECT: PP-PE PILOT PLANT			
		DATA SHEET FOR ON/OFF VALVE			
Contractor Job No:		Doc. No:			
Owner Job No:		Sheet No. : of			
Valve (HV)	Item	HV 4255			
	Service	NIT to CY 422			
	Location	LOCAL			
	P&I n.	312002_042			
	Fluid	NITROGEN			
	State	GAS			
	Condition	Normal Pressure	Barg	5	
		Normal DP	Barg	30	
		Max Pressure	Barg	35	
		Normal Temp.	°C	AMB (2)	
		Max. Temp.	°C	-60 +120	
	Flowrate	Normal	Kg/h		
		Minimum	Kg/h	0	
		Full Scale	Kg/h	0	
	Sp. Gr.	Gas vapurs	Kg/m3		
		Liquid	Kg/m3		
		Mol. Weight	Kg/Kmol		
		Viscosity	mPa's		
	Type	FULL BORE BALL VALVE - Flanged - Raised Face			
	Size	1/2"			
	Rating	ANSI #300			
	Fire Safe Seat	YES			
	Body material + Trim Material + stem Material	forged S.Steel 316			
	Valve Seat	Metal to metal seated valves			
	Valve Seat material	316 SS			
	SEAL	VTA(PTFE OR Carbographeite)			
MANUFACTURER	VTA				
MODEL no.	VTA				
Ordering code information	VTA				
Certificates & Calibration	pressure test, inspection certificate-Works				
accessary	Marking(Tagging)				

	PROJECT: PP-PE PILOT PLANT	 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
	DATA SHEET FOR ON/OFF VALVE	
Contractor Job No:	Doc. No:	
Owner Job No:	Sheet No. : of	

Pneumatic Piston+Cylinder Actuator	Type of Actuator		NA	
	Actuator size		NA	
	Actuator ANGLE (torque)		NA	
	Acting = Spring Return or Double Acting Type		NA	
	Air supply press.	Barg	NA	
	On Air Failure		NA	
	Manual Hand-Wheel + Declatched or Side type		Manual Hand-Wheel	
	Body material		NA	
	Valve position monitor		NA	
	Air filter regulator + Supply & output pressure gauge		NA	
	MANUFACTURER		NA	
	MODEL no.		NA	
	Ordering code information		NA	
	accessary		NA	
Solenoid	Solenoid Valve Type		NA	
	Power Supply V DC		NA	
	ENCLOSURE PROTECTION		NA	
	Mounting Position (Remote version or compact)		NA	
	single actuated with spring return mechanism		NA	
	double actuated with two locking positions		NA	
	On Power Failure		NA	
	Threaded connection Size		NA	
	Degree of protection		NA	
	Output current (mA)		NA	
	Electrical connection		NA	
	MANUFACTURER		NA	
	Ordering code information		NA	
	accessary		NA	
Limit Switch Or Proximity Sensor	Type	Quantity	Proximity Sensor - Namur	1 = For close
	Power Supply V DC		8 V DC	
	ENCLOSURE PROTECTION		EE xia , IIC , T6	
	Degree of protection		IP 65	
	Electrical connection		M20 & 1.5	
	MANUFACTURER		VTA	
	Ordering code information		VTA	
	accessary		Safety Barrier	

Date	Status	Prepared	Checked		Approved

پیوست شماره 2: پیشنهاد قیمت

پیوست شماره 3: جدول بازرسی فنی
INSPECTION & TEST PLAN FOR ON/OFF
VALVE

PROJECT: PP-PE PILOT PLANT



TITLE: INSPECTION & TEST PLAN FOR ON/OFF VALVE

شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

INSPECTION & TEST PLAN FOR ON/OFF VALVE

Document No.:900-ITP-A4-IN-0002

Rev.: 0

Owner Job No.:

Type: ITP

Contract Job No.:

Page A

REV. PAGE	0	1	2	3	4	REV. PAGE	0	1	2	3	4
A	X					29					
B	X					30					
1	X					31					
2						32					
3						33					
4						34					
5						35					
6						36					
7						37					
8						38					
9						39					
10						40					
11						41					
12						42					
13						43					
14						44					
15						45					
16						46					
17						47					
18						48					
19						49					
20						50					
21						51					
22						52					
23						53					
24						54					
25						55					
26						56					
27						57					
28						58					
4											
3											
2											
1											
0		8/23/2021		K.A.		M.N.		N.N.			IFA
Revision	Date	Prepared By	Checked By	Approved By	Status						
Document revision											
						Document No.: 900-ITP-A4-IN-0002			Rev.: 0		
						Owner Job No.:			Type: ITP		
						Contract Job No.:			Page B		

ITP FOR ON/OFF VALVE



Doc. No. : 900-ITP-A4-IN-0002
 Rev. : 0
 Page 1 Of 1

ABBREVIATION ON TYPE OF INSPECTION

H: Hold Point, inspection notification required. During hold point inspection, the witness will be performed.
 The Vendor shall not proceed with the work until presence of the inspector or written consent of the inspector.
 W: Inspection activities performed by the Vendor and witnessed by the inspector. Inspection notification required.
 If the Inspector is not present, the Vendor may perform the inspection/tests as scheduled unless otherwise requested.
 S: Witness, but spot check basis, inspection notification required. Initial operation will be witnessed and subsequent operation will be witnessed at discretion of the inspector considering the results of previous inspection unless otherwise inspection % specified.
 R: Review of inspection records and/or specified document
 M: Vendor's inspection and tests X: Required

1. Inspection/Tests by the OWNER
2. Inspection/Tests by Purchaser and/or Purchaser's Representative
3. Inspection/Tests to be Performed by Vendor as a Minimum
4. Certificate/Data to be Provided by Vendor

No.	1.	2.	3.	4.	Inspection/Test Items	Procedure & Standards	Remarks
					(Pneumatic type On-Offl valve)		
01	R	W	M		Visual inspection	Approved procedure and drawings	
02	R	S	M	X	Dimensional inspection	Approved procedure and drawings	
03	R	W	M	X	Material identifications against material certificates	Approved procedure and drawings	
04	W	H	M	X	Checking of characteristics including the following items as minimum: 1)Body, seat, stem, packing, accessories and actuator 2)Check of material certificates for body, trim, seat, plug, disc or ball, bolting, gasket/packing	Approved procedure and drawings	
05	R	R	M	X	Non-destructive examination, when specified	Approved procedure and drawings	
06	R	W	M	X	Pressure test of body(Note: Witness for body class 300 and larger)	Approved procedure and drawings	
07	R	W	M	X	Seat leakage test	Approved procedure and drawings	
08	R	W	M	X	Air failure test	Approved procedure and drawings	
09	R	W	M	X	Response and stabilization time	Approved procedure and drawings	
10	R	S	M	X	Insulation resistance test	Approved procedure and drawings	
11	R	S	M	X	High voltage test	Approved procedure and drawings	
12	H	H	M		Preparation for shipment	Approved procedure and drawings	
13	R	R	M	X	Documentation review prior to release	Approved procedure and drawings	

Note: Percent of witness for type "S" shall be depend on the quantity as follows: 3 to 20→3(all if total 2 and less), 20 to 40→5, 50 to 100→10, 100 to 200→15, 200 to 300→20, 300 to 500→25.
 For another type, percent of witness inspection shall be 100%.

شماره صفحه
183 از 270

پیوست‌های موافقت‌نامه مناقصه دو مرحله‌ای
خرید 108 عدد ولوهای ON/OFF برای فاز گازی واحد پلی‌اتیلن / پلی‌پروپیلن



پیوست شماره 4 : MR (Material Requisition)

Instruction for Vendor Documentation :1- 4



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: INSTRUCTION FOR VENDOR DOCUMENTATION

Page: A

PAGE	REV.	0	1	2	3	4	5	PAGE	REV.	0	1	2	3	4	5	PAGE	REV.	0	1	2	3	4	5
A	X																						
1	X																						
2	X																						
3	X																						
4	X																						
5	X																						
6	X																						
7	X																						
8	X																						
9	X																						
10	X																						
11	X																						
12	X																						
13	X																						
14	X																						
15	X																						
16	X																						

5																							
4																							
3																							
2																							
1																							
0	20-Oct-20	M.Asgari	M.Nazeri Nasab	M.Danehgar	M.Asadi	N.Nouhjah	IFA																
Rev	Date	Prepared By	Checked By	Approved By	Approved By	Approved By	Status																
		Discipline			PEM	PM																	

Document Revisions



CONTENTS

1. Purpose
2. Definition
3. Content
4. Instructions concerning vendor's data books presentation
 - 4.1 Language / units
 - 4.2 Size of documents
 - 4.3 Class of documents
 - 4.4 Books form
 - 4.5 Identification
 - 4.6 Internal presentation
 - 4.7 Vendor documents numbering
5. Number of vendor's data books per purchase order
6. Delivery time
7. Transmittal of documentation
8. Documents for engineering
 - 8.1 Vendor drawing and documentation list
 - 8.2 Plate arrangement drawing and material list
 - 8.3 General arrangements drawing
 - 8.4 Detail drawings
 - 8.5 Calculation notes
 - 8.6 Spare parts list
9. Description of inspection and / or acceptance documents
 - 9.1 Material certificates
 - 9.2 Welders qualification
 - 9.3 Hydraulic test report
10. Issuance schedule



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: INSTRUCTION FOR VENDOR DOCUMENTATION

Page: 2

1. Purpose

The purpose of this procedure is to give instructions for preparation of Vendor's data book (mechanical catalogue) applicable to the contract.

2. Definition

VENDOR Companies Awarded by Owner for Procurement Services, Inspection Affairs or Transportation, Providing of Project's goods, following up all transport activities from VENDOR workshop to final destination as defined in the purchase order.

OWNER: Petrochemical Research & Technology Company

3. Content

The Vendor's Data Book shall contain comprehensive detailed information covering design and engineering, inspection and testing, installation, operation and maintenance manual of the equipment and accessories included in, and supplied for the plant.

In addition, VENDOR shall submit the drawings and documents according to the "LIST OF DOCUMENTS REQUIRED FROM VENDOR" given in the requisition / purchase order.

For a sample of the contents of VENDOR's data book refer to Attachment No. 1.

4. **Instructions Concerning Vendor's Data Books Presentation**

4.1 **Language / Units**

All documents and drawings for design and fabrication shall be written in English as well as all Maintenance and Operating Instructions.

All units and dimensions shall be in the metric system except for the following:

- Size of pipe and valve (Inch)
- Flange rating (Pound)

If necessary, other units and dimensions shall be used with OWNER approval.



4.2 Size Of Documents

- All drawings shall be prepared on ISO standard size sheets, i.e.
 - A0 : 840 x 1188 mm
 - A1 : 594 x 840 mm
 - A2 : 420 x 594 mm
 - A3 : 297 x 420 mm
 - A4 : 210 x 297 mm
- Size A0 should be used only with OWNER approval.
Larger sizes are not allowed.
- In general all drawings shall be reduced to 297 mm x random length size for convenience in handling.
- All documents other than drawings shall be prepared on standard A3 or A4 size sheets suitable for insertion in an A4 hard-core binder.
- All reduced drawings, data, etc. shall be legible.

4.3 Class Of Documents

All drawings / data submitted must be of good quality that will allow production of legible copies.

- Documents submitted to OWNER for comments:
These documents give all data necessary to understand operation and to appraise the construction method, assembly, disassembly, fastening and connections of equipment. They clearly indicate the scope of supply and specify all details necessary for installation.
- Final documents:
These documents are certified, "As built" documents finally reviewed without comment by OWNER.
OWNER comments on VENDOR documentation shall in no way relieve the VENDOR of his responsibility especially concerning the design of the equipment or facilities.

4.4 Books Form

All the documentation shall be inserted in A4 (297 mm x 210 mm) white color binder (Punch holes shall be two).

Other types, such as folders or boxes with loose sheets, are not acceptable.
The thickness of each volume shall under no circumstance exceed that of a normal file (7 cm). The paper level inside each file shall be at least 5 mm below the opening point of the binder.



Drawings and documents with sizes larger than A3 will be folded in plastic jackets inserted in the file, with opening upward.

4.5 Identification

Each Vendor's data book shall be identified on its back and on the cover by a standard label, the format of which is given in Attachment No.2.

4.6 Internal Presentation

All drawings and documents shall be written in English.
Cardboard division sheets shall separate different groups of documents, sheets and directions. At least rigid index sheets with numbering shall separate the different chapters.

The wording and presentation of the reports will be controlled with utmost care.


Consequently, any loose presentation, which may give the OWNER impression of careless work, will be rejected. This applies in particular to:

- All manuscripts or type texts with handwritten comments (except for technical documents on OWNER or Vendor's standard forms).
- All texts in any language other than English, unless they are transmitted together with a translation in compliance with the above requirement.
- All copies that might be questionable: writing too light, dark background areas, dark edge due to poor centering, titled copy, perforation marks, etc.

4.7. Vendor Document Numbering

In addition to the Vendor's document number, VENDOR shall add OWNER's document number.

The block shown here below will be placed on each "first page" of specification, data sheet and each drawing in addition to the Vendor's label.

 National Petrochemical Company / Petrochemical Research & Technology Company PP-PE Pilot Plant				
NPC-RT PP-PE Pilot Plant	Owner Project No.	Rev.	Date	Signature
	Owner Doc/Dwg. No.			
	Sh. Of			



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: INSTRUCTION FOR VENDOR DOCUMENTATION

Page: 5

All other pages of the specifications and data sheets shall have the following block.

Project No.	Owner Project No.	Rev. Sh. Of
OWNER DOC. No.		

5. Number Of Vendor's Data Books Per Purchase Order

If the purchase order includes several separate requisitions or covers several items, which are to be shipped with different vessels, the VENDOR shall supply as many separate Vendor's data books, as there are separate requisitions and/or shipments.

If the requisition covers a large number of items, a common part and specific chapters by item may be planned in agreement with OWNER.

VENDOR shall prepare:

- 3 Copies of the complete VENDOR Data Book.
- Copy of electronic file in CD
- 2 Reproducible copy of final drawings / documents

6. Delivery Time

Documents submitted for review are forwarded in compliance with the dates specified on the Attachment # 2 of requisition.

Final documents shall be forwarded 15 days after receipt of documents commented by OWNER.

Delivery dates are mandatory and a payment installment may be conditioned by the receipt of documents and/or drawings (refer to the order provisions).

7. Transmittal Of Documentation

All drawings and documents shall be transmitted with a transmittal note to the address indicated in the Purchase contract. Purchase order number should be clearly indicated.

Any drawing, which is unreadable, will be returned without fail to the VENDOR who shall in no case use this as an excuse for delivery delay.

Any revision made on documentation should be highlighted with a cloud mark.



8. Documents For Engineering

This paragraph is to clarify OWNER requirements concerning the presentation of some essential engineering documents and drawings submitted for approval. The items indicated below refer to the items listed in the “LIST OF DOCUMENTS REQUIRED FROM THE VENDOR” shown in the attachment # 2 of requisition.

8.1 Vendor Drawing And Documentation List

The VENDOR'S shall provide an exhaustive list of the documentation to be delivered. It should be sent together with the first issue of documents.

8.2 Plate Arrangement Drawing And Material List

This drawing shall be in proper scale.

The plate arrangement drawing or sketch shall indicated as a minimum:

- A general outline of the equipment (shells, heads, supports, skirt, lugs, saddles, stiffeners, etc.);
- For columns, shell / cone / skirt development including all internal & external attachments;
- Position of circumferential and longitudinal weld seams in accordance with plates sizes;
- Head shape (and plate arrangement in case of composed head);
- Shape of reduction cone (straight flange, knuckle radius, etc.);
- Plate thickness after plate forming;
- Material specification;
- Material list

Approval of this document enables order of main materials to be finalized.

The material list for nozzles shall be presented in schedule form. It shall be established from the nozzles list shown on the engineering arrangement drawing or process data sheet, and shall include:

- Identification (or item), quantity and diameter of nozzles;
- Type, rating, facing and material of flanges;
- Schedule or thickness of nozzle necks;
- Diameter, thickness and material of reinforcements;
- Material, thickness, rating of blind flanges (if any);
- Diameter, quantity, length, thread type, material of stud bolts and nuts;
- Definition, rating, materials of gaskets



This document is prepared from information known when equipment is ordered. Its approval will allow the above accessories to be supplied.

Any modifications of one of the items listed above will involve revision of the documents and be followed by new approval.

After approval, the material list shall be transferred on the VENDOR general arrangement drawing.

Note: these documents do not apply to storage tanks.

8.3 Item: General Arrangement Drawing

The VENDOR can start fabrication only after receiving OWNER approval of this document as a minimum.

This drawing shall be in proper scale.

This drawing shall give the following technical information:

- Main dimensions, overall length, minimum thickness of major components;
- Design code, design pressure and temperature, hydrostatic test pressure, non-destructive tests, heat treatment, etc.;
- Corresponding material specification;
- Location and orientation of weld seams (shells, heads, skirt, etc.);
- Shape of heads or, type/ angle of roof for storage tanks;
- Location, orientation of nozzle gussets and other external welded Attachments;
- Location & orientation of internals (trays supports, coils, demisters, baffles, etc.);
- List of nozzles and connections in accordance with material list (dia., type, rating, schedule, etc.);
- Gaskets and bolting (type, material, etc.);
- All information of scope of supply;
- All information on anchoring system;
- Fabricated weight;
- Empty weight;
- Hydro test weight;
- Operating weight;
- Net weight of removable parts;
- Type of paint and its surface preparation;
- North direction;
- List of detail drawings;
- Insulation / fire proofing support detail;

Note: OWNER guide drawings shall not be used as construction drawings.



8.4 Detail Drawings

These drawings shall include references to general arrangement drawing and show:

- Detail of all accessories, internal and external attachment (gussets, etc.): With weld geometry and specification in accordance with approved welding procedure;
- Weight and dimension of removable internals;
- Part list of the various elements;
- Weld geometry and specification in accordance with approved welding procedure;
- All information required on manufacturer name plate;
- Insulation / Fire proofing support detail;
- All construction details not covered above;

All this information may be shown on general arrangement drawing, at Vendor's choice.

8.5 Calculation Notes

Calculation notes shall be in accordance with general arrangement drawing.

VENDOR shall establish calculation notes for each equipment.

They shall in all cases be included in "manufacturer file".

These documents shall be clearly marked with identification numbers as other VENDOR documents.

They shall include full reference to information sources (codes, formulas, etc.) used for design.

These documents shall be transmitted for review / approval to OWNER.

These documents shall be approved prior to general arrangement drawing approval.

OWNER approval shall in no case relieve the VENDOR from his responsibilities.

8.6 Spare Parts List

SPARE PARTS LIST AND INTERCHANGEABILITY RECORD (SPIR form) to be filled out by VENDOR according to it's filling procedure.

9. Description Of Inspection And/Or Acceptance Documents

This paragraph clarifies OWNER requirements for documents relating to inspection and acceptance of equipment.

The items indicated below refer to the items listed in the "LIST OF DOCUMENTS REQUIRED FROM THE VENDOR" included in the requisition.



9.1 Material Certificates

All pressurized parts shall be considered as main components requiring certificates type 3

.1. B including:

- Shell, heads, cones
- Skirt, saddles, support brackets
- Tubes, flanges, forging, internal piping, nozzle necks
- Bolting for nozzle and shell flanges
- Welding material

9.2 Welders Qualification

This document shall contain all the information concerning:

- Welders (name, number, mark)
- Welding procedure
- Base material (specification, thickness, etc.)
- Welding material (specification, diameter, etc.)
- Electrode type
- Destructive tests results (bending, tensile, impact tests)

All information required on the QW 484 forms given by ASME section IX shall be considered as a minimum.

9.3 Hydraulic Test Report

This document shall contain the following information:

- Type and volume of equipment
- Contained gas analysis
- Description of equipment (length, width or diameter, nature of base material, thickness)
- Construction number and date
- Hydrostatic test pressure in letters
- Date of inspection (before test) and inspector's name
- Hydrostatic test data
- Signatures of inspectors

10. Issuance Schedule

Final Vendor's data books should normally be shipped to the OWNER as per agreed delivery schedule specified in PO of the relevant equipment.

Such final Vendor's data books shall be an integral part of the Vendor's services set forth in the purchase order and the following precautions must be taken in order to meet the above shipping requirements:



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: INSTRUCTION FOR VENDOR DOCUMENTATION

Page: 10

At the latest 2 months before the scheduled delivery date, the VENDOR shall transmit the Vendor's data book model to OWNER for comments and approval.

The model shall be in conformity with the final internal and external presentation and shall contain all documents required for the final report.

A non- completed form will replace the final acceptance documents, which do not exist at that stage.

Note: Recommendation for handling, transport and storage shall be shipped in box together with the equipment.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: INSTRUCTION FOR VENDOR DOCUMENTATION

Page: 11

ATTACHMENT # 1

VENDOR DATA BOOK'S CONTENT (SAMPLE)



PART 1 : General Descripton Of The Equipment

- 1.1. OWNER's requisition
- 1.2. General description including OWNER's specifications and data sheets and drawings

PART 2 : Recommendations For Storage, Handling And Lifting

- 2.1. Special precautions for handling prior erection (1)
- 2.2. Recommendations for storage prior and during erection

PART 3: Erection

- 3.1. List of components to be erected/installed on site
- 3.2. Detailed schedule of the erection including hypothesis taken into account
- 3.3. Procedures for erection and installation of the equipment
- 3.4. Schedule of connection points detailing locations and dimensions
- 3.5. Electrical terminal wiring diagrams
- 3.6. Details of site assembly, and filed welds
- 3.7. List of special tools for site erection and assembly
- 3.8. Procedures for site assembly, leveling and welding
- 3.9. Welding specifications for field welds
- 3.10. List of checks and tests to be performed on site
- 3.11. Site testing and acceptance procedures
- 3.12. Procedures for preparation of the equipment for commissioning (including the calibration of instruments)
- 3.13. List of works to be implemented on site instead of Vendor's shop (When required)
- 3.14. Weight (empty, full of water)

PART 4 : Start-Up Running Instructions

- 4.1. General
- 4.2. Principle
- 4.3. Operation
- 4.4. Description of the apparatus
- 4.5. Commissioning
- 4.6. Running instructions



PART 5 : Maintenance Instructions

- 5.1. Maintenance
- 5.2. Safety instructions
- 5.3. General maintenance
- 5.4. Lubricant table and equivalence
- 5.5. Trouble shooting check lists and diagrams
- 5.6. Maintenance Schedule

PART 6: Spare Parts (2), (6)

- 6.1. Spare parts for erection, precommissioning, commissioning and start-up
- 6.2. Spare parts for 2 years operation
- 6.3. Sectional drawings

PART 7: Manufacturer's Documents / Drawings (3)

- 7.1. List of drawings (4)
- 7.2. Manufacturer's data report
- 7.3. Drawings (5)
- 7.4. Calculation notes
- 7.5. Curves and technical data (including P.W.H.T. if applicable)
- 7.6. MANUFACTURER name plate photography

PART 8: Quality Assurance And Manufacturing Documents

- 8.1. Material test certificates
- 8.2. Welding Inspection controls and test reports
- 8.3. Welding procedure specification
- 8.4. Welding procedure qualification reports
- 8.5. Welder qualification reports
- 8.6. Weld identification
- 8.7. Plate identification sketch with heat numbers
- 8.8. Certificate of shop inspection (before hydrostatic test)
- 8.9. X-Ray identification
- 8.10. Radiographic procedure qualification
- 8.11. Radiographic reports along with radiographs
- 8.12. Batch test certificates from manufactures for electrodes
- 8.13. Hydrostatic and other test results and reports (such as visual control and N.D.T., etc.).
- 8.14. Precommissioning / commissioning check Lists & procedures
- 8.15. All other requirements as specified in the respective specifications



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: INSTRUCTION FOR VENDOR DOCUMENTATION

Page: 14

Remarks

- (1) Including a copy of transportation drawing
- (2) No spare parts price must be incorporated in this book
- (3) Only issues approved by as “FINAL”
- (4) Only the drawings included in this part 7.
- (5) Drawings larger than A3 format must be folded and inserted in individual plastic skirts.
- (6) Sufficient information to be prepared for spare parts Such as: materials of construction sizes / three proposed Vendor's, etc.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: INSTRUCTION FOR VENDOR DOCUMENTATION

Page: 15

ATTACHMENT # 2


VENDOR'S DATA BOOK

COVER




Attachment #8 Instruction for making Data CD

• CD Title CASE

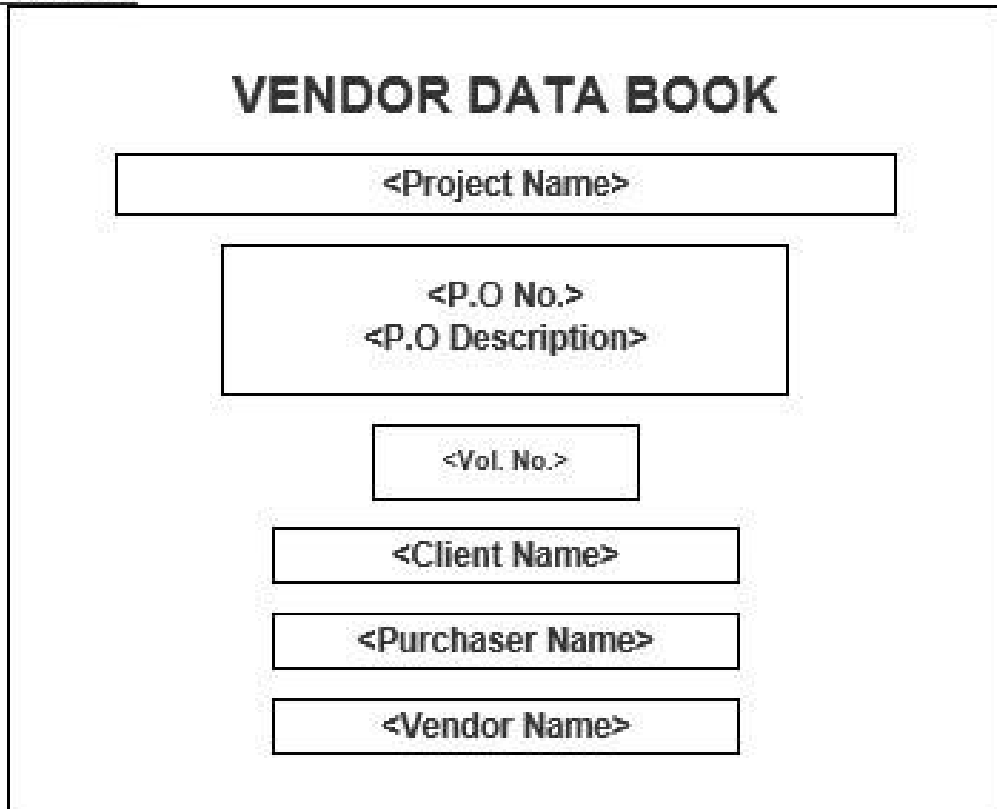

• Construction of the Data Folder

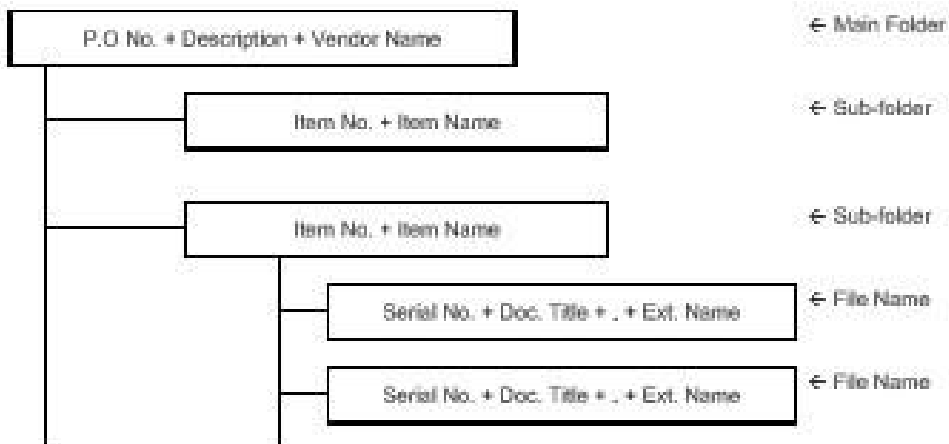

شماره صفحه
202 از 270

پیوست‌های موافقت‌نامه مناقصه دو مرحله‌ای
خرید 108 عدد ولوهای ON/OFF برای فاز گازی واحد پلی اتیلن / پلی پروپیلن



Packing and Marking Procedure: 2 - 4



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: PACKING AND MARKING PROCEDURE

Page: 1

CONTENTS

1. Scope
2. Purpose
3. Definitions
4. Packing for Equipment and Materials
5. Packing and Marking for Electrical Panels And Instruments



1. **Scope**

- 1.1 This procedure gives the information for Packing and Marking and it is to be applied to vendors for the preparation, protection and packaging of materials, equipment, requiring export shipments for the PP-PE Pilot Plant Project to be built in Petrochemical Research & Technology Company, Arak/Iran.

The following instructions are intended as minimum requirements, and adherence to these instructions in no way, absolves or relieves Vendors of any responsibility or obligation outlined in the Purchase Order.

2. **Purpose**

This document defines the criteria required by the Project in relation to the packing and marking of both Project's Equipment and materials including Electrical Panels and Instruments.

3. **Definitions**

OWNER	Petrochemical Research & Technology Company
PROJECT	PP-PE Pilot Plant
GOODS	All kind of materials and equipment to be incorporated in the Project.
VENDOR	Companies Awarded by Owner for Procurement Services, Inspection Affairs or Transportation, Providing of Project's goods, following up all transport activities from VENDOR workshop to final destination as defined in the purchase order.

4. **Packing For Equipment And Materials**

- 4.1 Equipment and material shall be exported packed in compliance with General Purchase Conditions and the best established practice for overseas construction jobs in accordance with the following directives. In the event of any divergence between this specification and the established practice, this specification shall govern.
 - 4.1.1. "Seaworthy and tropical proof " according to international standard.
 - 4.1.2 Packing and conservation of goods shall be sufficient to protect them from damage during transit from point of manufacture to the delivery at job site under conditions



which may involve multiple handling, extended storage, exposure to moisture and the possibility of pilferage. The contents must withstand one year transit conditions without suffering damage and Vendors shall give recommendations for a further two(2) years storage under SITE conditions.

Required storage facilities and procedure shall be advised by manufacturer/seller in advance.

- 4.1.3 The packing of the equipment and materials shall be carried out in order to comply with transport conditions.
- 4.1.4 Individual packages shall be kept as small in bulk as possible.
- 4.1.5 Individual packages exceeding a gross weight of 3,000 kgs shall be avoided, if possible.
- 4.1.6 Kind and dimension of packages shall be chosen to suit overseas transport in containers and to fully utilize the size of containers.
- 4.1.7 The following inside dimension of containers are to be observed :
40-foot-containers : 1195x220x205 cms.
20-foot-containers : 595x220x205 cms.

4.2 Modes of Packing

In accordance with the nature of the contents, the following modes of packing shall be considered:

- a) wooden cases
- b) wooden crates
- c) skid-construction (for vessels etc.)
- d) non-returnable steel drums (export variety)
- e) non-returnable cable reels
- f) bales
- g) 20 ft - 40 ft non-refundable containers

4.3 General Rules for Packing

- 4.3.1 Cases and crates shall be made from new, sound and seasoned lumber. Sheathing shall be of min 24 mm thickness.

If so required for static reasons, thicker sheathing shall be used, in accordance with size and weight of the package. Timber crates and boxes shall be strong enough to withstand without any damage, transport on ship board at sea and numerous handling between the works and the port of origin and between the port of destination and the site.



- 4.3.2 Cases and crates with gross weight up to 1,000 kgs shall be provided with bottom cleats of min. 40 mm thickness to ensure clearance for handling by forklift. Cases and crates exceeding gross weight of 1,000 kgs shall be provided with skid runners, number and size according to weight of package.
- 4.3.3 The contents of cases shall be protected by waterproof and strong plastic foil which shall be sealed by welding. An adequate quantity of moisture absorbent (silica gel) shall be added to protect the contents for sufficiently long time from corrosion.
- 4.3.4 Felt , cellophane paper, polyester cuttings , crepe cellulose and some equally efficient materials may be used for padding or cushioning. Wood shavings and other paper shall not be used for padding or cushioning.
- 4.3.5 Materials shall be protected against corrosion during transit as necessary. All bright and machined parts shall be coated with a recognized rust preventative suited to the particular application concerned. All internal parts of machinery shall be treated with lubricant containing rust and oxidation inhibitors to protect equipment from any damage possible. Such lubricants shall be compatible with those which will subsequently be used in service and shall be identified by appropriate tagging.
- 4.3.6 When required, materials shall be painted or coated in accordance with the particulars contained in the purchase order and/or specifications.
- 4.3.7 All flanges, machined working surfaces and threaded parts of all equipment shall be suitably protected . All flanged connections of vessels shall be protected by metal plates correctly gasketed by wooden plugs or plastic caps suitably secured in position.
- 4.3.8 Units or parts belonging to main equipment but separately packed shall be clearly marked for easy identification with the main equipment to which they relate.
- 4.3.9 Packages containing "FRAGILE" articles shall be appropriately packed and in addition to the words "FRAGILE-HANDLE WITH CARE" being stenciled on two opposite sides, internationally recognized symbols shall also be used "This Side Up".
- 4.3.10 Pipe, structural steel sections and plates shall be strapped in bundles of convenient size and weight for handling. Rolled and shaped plates shall be provided with suitable bracing to eliminate distortion during transit, and shall be bundled in uniform lengths. The weight of each bundle shall be within the breaking strain of the steel wrapping. Each bundle shall be marked with a metal tag ,hard stamped, secured under steel wrapping. A 2000 kg limitation shall be imposed for lifts in this category. Where practicable long lengths shall be limited to 12.2 meters to avoid long length carriers. All small steel sections, handrail stanchions, gusset plates etc. shall be boxed.
- 4.3.11 Black steel pipes with an outside diameter of up to 168.3 mm shall be bundled by strapping cleats above and below the load, with boards between each pipe layer and secured by bolts.



Black steel pipes exceeding the above outside diameter shall be treated as an individual package and marked accordingly.

All black steel pipes shall be protected by means of TECTYL spray. The pipe ends shall be closed with plastic caps.

If, in case of pipes with large diameters, the pipe ends cannot be closed with plastic caps, the interior of the pipes shall also be protected and sprayed with TECTYL.

4.3.12 Bitumen coated pipes shall be prepared, packed and handled according to established practice.

4.3.13 Stainless steel pipes shall be packed in wooden cases.
Protection with TECTYL is not necessary.

4.3.14 All valves and fittings (pipe elbows, flanges, etc.) shall be suitably protected and their method of shipment shall be:

- a) All valves and fittings shall be suitably packed and shipped in metal strapped or wood re-enforced waterproof wooden cases with metal corner protection .
- b) All treaded fittings shall be greased and provided with plastic caps.
- c) Control valves shall be packed in wooden cases having adequately designed interior support with interior water proof protection .

4.3.15 Apparatus and vessels shall, where possible, be packed on skid constructions and secured with adjustable steel straps. All unprotected surfaces shall be sprayed with TECTYL. Manholes and other major openings shall be protected with either plastic caps or wooden lids, which shall be firmly secured. Smaller openings shall be closed with plastic plugs.

4.3.16 All vessel internals and items not installed by the vendor at works including accessories such as small parts, bolts, nuts, gaskets etc. shall be packed in wooden cases separately for each vessel or apparatus and marked with the same item number as the vessel/apparatus in order to protect all parts from loss or damage in transit. Internals, bolts and gaskets for service/ testing operations shall be supplied with the vessels/items by the vendor and all internals, boxed separately and marked according to marking procedures. Each item shall be supplied correctly and identified for field installation by others.

NOTE: It is imperative that all these items be clearly listed on the packing list.

4.3.17 Fire bricks, special tiles and insulation refractories shall be boxed after sealing in a polyethylene liner. These boxes shall be skid mounted. Instructions regarding storage prior to installation shall be stenciled on each box with particular reference to adverse weather/temperature/humidity conditions.

4.3.18 All electrical motors whether coupled or uncoupled, generators and electrical equipment shall have all openings sealed with protective tape, shall be packed in suitable weather proof skid mounted boxes, and protected from moisture ingress by desiccant as described above.



Items with brushes shall be brushed and rust removed before shipment.

All electrical equipment shall be suitably protected to withstand 1 year transit conditions and Vendors shall give recommendations for a further , 2 years storage under site conditions

Batteries shall be shipped dry with electrolyte packed separately and shall include charging instructions.

4.3.19 All electronic and pneumatic instruments to be packed in accordance with given instructions and must be suitably protected to withstand 1 year transit conditions and Vendors are to give recommendations for a further 2 years storage under site conditions.

4.3.20 Pipeline / vessel insulation shall be packed in double water-proof wooden plywood cases and secured to pallets.

Drums of insulation mastic will also be shipped on pallets.

4.3.21 Spare parts for two years operation, which shall be individually tagged, must be covered with a suitable preservative and wrapped with greaseproof paper and be packed in separate cases from the base item. The cases are to bear the markings as specified and in addition the words "SPARE PARTS FOR TWO YEARS OPERATION".

4.3.22 Commissioning spares shall be individually tagged and marked "COMMISSIONING SPARES" and shall be packed and shipped with the base item.

4.3.23 All vessels/heat exchangers or items of such kind shall be dried, thoroughly cleaned inside and be free of all dirt and loose materials.

4.3.24 Should any materials be scheduled to be freighted as deck cargo, additional packing instructions may be required; the Vendor will advise, for vessels and columns, which shipment cradles will be used throughout the transportation. Cradles to be secured to vessels and columns, by strapping.

4.3.25 Paper bags suitably boxed, or water tight Steel Drums will be used for shipping cement, special aggregate, etc. Paperbags must not be less substantial than 60 lbs outer wall, 40 lbs inner wall and one moisture craft inner wall.

4.3.26 Unless otherwise specified, all export cases, boxes, bundles and containers are to be securely metal strapped with a minimum of two unannealed steel straps in each of two right angled and opposite directions, or where applicable wood re-enforced.

NOTE: Should consignments arrive at the shipment point of origin visually damaged, the shipping agent will advise and await instruction before onward shippings.

4.3.27 All bulk items, lighting, fittings, cable glands, switches etc. are to be packed in batches sufficient for a specific volume of work.



- 4.3.28 Cases and crates shall, according to their weight and size , be provided with two or more steel straps made of unannealed steel, applied with a stretching tool and secured with crimped steel seals.
- 4.3.29 Fittings (valves, pipe elbows, flanges, etc.) must be packed in wooden cases and must be protected.
- 4.3.30 Accessories for apparatus and vessels (small parts, bolts, nuts, washers, gaskets, etc.) are to be packed in wooden cases, separately for each apparatus or vessel. These cases must be marked with the same item No. as the apparatus/vessel to which it belongs (see also Item 5 - packing lists).
All commissioning spare parts to be packed separately, being the packing marked with the relevant main item.

4.4 Marking of Packages

- 4.4.1 All packages shall be clearly stencilled on two opposite sides with black, indelible and seawater proof paint, as follows:
Wherever possible , the stenciled characters shall be 8 cms high.
In case the surfaces of a package are too small to permit stenciling, sheet metal tags shall be embossed with the above marking and shall be securely fastened on two opposite ends of the package.
- 4.4.2 If necessary, packages shall be additionally marked with cautionary symbols on two opposite ends.
- 4.4.3 Packages which may be stored in the open but under a tarpaulin, shall be marked with a red "double roof" symbol.
- 4.4.4 Packages which are to be stored in closed and dry places shall be marked with a red "double roof" symbol.
- 4.4.5 The system of package-numbering shall be indicated to the OWNER in due course of time.
- 4.4.6 The gross weight shall be determined by the party who is responsible for the packing of the items/materials.
- 4.4.7 Example for marking of packages is shown in attach 1.

4.5 Packing list

The packing lists shall be prepared on standard forms :
The necessary number of forms will be made available to OWNER , who shall advise about the quantity required.
The packing list forms shall be filled in ENGLISH language.



OWNER shall supply VENDOR with a specimen packing list showing how it is to be filled in.

At the same time OWNER shall be informed of the package numbers required for marking the packages. one column of the packing list shall be filled in with OWNER "ITEM NO. " These item numbers shall be taken from the order form. Special attention shall be paid to the order form that the item number is correctly attributed to the goods to which it belongs . If any question should arise in this respect VENDOR shall contact the OWNERS Representative.

Special care shall be taken that all accessory parts loose or detachable, belonging to the main item under dispatch, shall also be individually listed in the packing list. In the event these accessory parts are not listed in the packing list , they shall be considered by OWNER as not delivered.

Two copies of the packing list in a water-proof plastic envelope shall securely be mailed under a galvanized steel sheet on the outer surface of the package The final packing list in 2-folds shall be available in OWNERS office 10 (TEN) working days prior to dispatch of the goods from the manufacturer's premises.

4.6 Liability and Guarantee

The party responsible for the packing shall be fully liable for and guarantee proper, sufficient and adequate packing, completeness of the contents, protection of the contents for a storage time of 12 month starting from the date when the equipment is loaded on the ship, and the correct preparation of the packing list.

All cost whatever resulting from inadequate or insufficient packing shall be fully charged to the responsible party.

5. Packing And Marking For Electrical Panels And Instruments

5.1 Scope

This section covers the method for packaging of electric and instrument panels for export delivery, which are to be provided with full protection against physical damage and atmospheric attack during transit and possible long periods under adverse storage conditions which may extend to two years.

5.2 General

This specification is for the package Vendor's guidance only.

Vendor shall remain fully responsible for selecting suitable materials for proper packaging and shall comply with the latest issues of the following European or British Standards: Where standards conflict with this specification, specification shall govern .

- Packing Code
- Silica gel for use as desiccant for packages
- Method of determining the permeability of materials used for packaging.



The Vendor shall provide written instructions for the removal of protective coatings and devices.

5.3 Method

5.3.1 The instrument or panel which shall be thoroughly clean, dry and free from rust shall be totally enclosed in a polythene shroud after sharp projections on the instrument or panel have been padded . Silica gel or other approved desiccant shall be strapped inside the shroud, but shall not come into contact with the paint work.

After the desiccant is strapped into position, the open ends of the shroud shall be heat sealed , only leaving an opening large enough for the insertion of an air extracting pipe. After extraction of the air from the shroud, the opening shall be completely sealed.

5.3.2 Packing Case Materials

- All wood shall be thoroughly seasoned and thoroughly sound without knots, knot holes, shakes and checks .
- Wood which can cause metallic such as oak , western red cedar and sweet chestnut shall not be used .
- The case shall be of sill base type. All sheating shall be tongued and grooved.

5.3.3 Packing Case Lining

The packing case shall be lined with completely multilayer waterproof.

The lining shall have as few joints as possible. If joints are necessary, the pieces shall be overlapped so that any rain water which may penetrate the case is shed automatically when the case is upright. Overlaps shall be 75 mm minimum Joints shall be made with Bostik 'C'".

5.3.4 Securing Instruments or Panels Inside Packing Case.

- a)The instrument or panel shall be completely secured by wooden battens faced with suitable rubber or other shock absorbing materials.
- b)Wood, wool and other hydroscopic shall not be used.
- c)Hay and straw shall not be used.

5.3.5 Sealing of Packing Case

After nailing, joints in the case shall be sealed with Bostik Sealing Compound and the outside bound with steel strapping .

5.4 Marking of Packing Cases

5.4.1 Cases which are for Carriage by sea shall be marked "HOLD STORAGE".

5.4.2 All cases shall be marked to indicate the correct way up and bear the marking described here in above.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: PACKING AND MARKING PROCEDURE

Page: 10

ATTACHMENT No.1

MARKING OF PACKAGES

PROJECT :

PROJECT No. :

L/C No. :

OWNER :

ORDERED BY :

ORDER No. :

FINAL DESTINATION : Pouyesh Site, Arak / Iran

STORAGE CODE :

DIMENSION : L x W x H

GROSS WEIGHT :

NET WEIGHT :

PACKAGE No. : _____ **OF** _____ .

MADE IN :

Spare Parts Procedure : 3 – 4



PAGE	REV.	0	1	2	3	4	5	PAGE	REV.	0	1	2	3	4	5	PAGE	REV.	0	1	2	3	4	5
A	X																						
1	X																						
2	X																						
3	X																						
4	X																						
5	X																						
6	X																						
7	X																						
8	X																						
9	X																						
10	X																						
11	X																						
12	X																						
13	X																						
14	X																						
15	X																						
16	X																						
17	X																						
18	X																						
19	X																						
20	X																						
21	X																						
22	X																						
23	X																						
24	X																						
25	X																						
26	X																						
27	X																						
28	X																						
29	X																						
5																							
4																							
3																							
2																							
1																							
0	20-Oct-20	M.Asgari	M.Nazeri Nasab	M.Daneshgar	M.Asadi	N.Nouhjah	IFA																
Rev	Date	Prepared By	Checked By	Approved By	Approved By	Approved By	Status																
		Discipline			PEM	PM																	

Document Revisions



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 1

These instructions outline the requirements for providing original manufacturer's pre-commissioning, commissioning and two years operation spare parts for a PP-PE Pilot Plant to be built in Petrochemical Research & Technology Company, Arak/Iran.

CONTENTS

- 1) General information
- 2) Definitions
- 3) Spare parts required
- 4) Required information
- 5) Identification
- 6) Packing and protection
- 7) Special storage items

Attachments:

1. Erection, precommissioning, commissioning and start-up phase spare parts
2. Two years operation spare parts
3. Guidelines for the compilation of Spare Parts Interchangeability Record (SPIR)
4. SPIR form



1) General Information

These instruction outline the requirements for providing original manufacture's pre-commissioning, commissioning and two years operation spare parts for PP-PE Pilot Plant to be built in Petrochemical Research & Technology Company, Arak/Iran.

The Vendor is obliged to provide with an original equipment manufacturer spare parts data package, containing full and complete spare parts information and prices for each item of equipment supplied.

The Vendor shall recommend those spare parts that are deemed necessary on the basis of Vendor's recommendations and experience.

2) Definitions

2.1 "Erection, Precommissioning, Commissioning and start-up spare parts" are those material, equipment or components necessary during the erection, precommissioning, commissioning and start-up activities of the Plant.

2.2 "Operating Spare Parts" are spare parts material, equipment or components necessary for the continuous operation of the plant after commissioning completion for a period of two years.

2.3 GOODS: All kind of materials and equipment to be incorporated in the Project.

2.4 VENDOR: Companies Awarded by Owner for Procurement Services, Inspection Affairs or Transportation, Providing of Project's goods, following up all transport activities from VENDOR workshop to final destination as defined in the purchase order.

2.5 OWNER: Petrochemical Research & Technology Company.

3) Spare Parts Required

3.1 Capital spare parts

Capital spare parts are defined in documentation prepared by technical department.

3.2 Erection, precommissioning, commissioning and start-up Spare Parts

Vendor is requested to submit a Spare Parts proposal together with base quotation. Such spare parts shall be packed in separate boxes and shipped together with the main equipment/material purchased in order to be available at the site together with the base order supply.

Minimum required quantities are shown in attachment 1.



3.3 Two years operation spare parts

Vendor is requested to submit a Operation Spare Parts quotation based on his experience together with base quotation

The necessary and sufficient two years spare parts include those parts that are normally required to maintain the plant in a satisfactory working condition for a period of two years of continuous operation after plant start-up.

These Operation Spare Parts shall be packed in separate boxes.

Guidelines for selection of two years spare parts are shown in attachment 2.

4) Required Information

4.1 All information and drawings must be in English language.

4.2 Data sheets, engineering drawings, manufacturer's catalogs and operating and maintenance manuals required to identify the function of and fully describe all parts associated with the equipment

4.3 The interchangeability of spare parts must be completely assured between all units contained on the parent equipment purchase order.

4.4 The Vendor shall guarantee the spare parts in accordance with the requirements requested for the parent equipment.

4.5 The offer must be valid for supply either for total or partial quantities.

4.6 All Spare Parts list shall be filled-in using the attached "Spare Parts Card" according also to the instructions attached herein.

Photocopied or hand-written documents are not acceptable.

Twelve (12) months price validity is required

5) Identification

All spare parts shall be individually identified by one of the following methods:

5.1 A stainless steel label imprinted with lettering approximately 6 mm (1/4) high and secured to the part with S.S. wire.

5.2 Inscribing with an electric spark erosion pencil

5.3 On large items inscribing with non-fading, moisture resistant marking ink, figures/ letters to be at least 25 mm (1) high. Ink shall be Pannier 1001 Yellow Industrial or equal.



- 5.4 Items such as Ball Bearings which in actual storage will remain in their packing may be identified with an adhesive label firmly attached to the outside of the carton.
- 5.5 Alternative methods which are standard industrial practice may be used provided SP's approval has been obtained in writing in advance. Stamping directly into spare parts will not be allowed.
- 5.6 The following shall appear on each spare or spare part label:
Manufacturer's real part number.
Short description (one word will suffice if space is limited).
Tag number of equipment (if applicale).

6) Packing And Protection

- 6.1 Packing protection and marking of the packing container shall be as described in Project Packing and Marking Procedure 000-PCR-PRC-0002. Spare parts shall be packed separately from main equipment and the packing containers shall clearly be marked "erection, pre-commissioning, commissioning, and start-up spare parts" or "two years operating spare parts" as applicale. The following additional comments apply :
- 6.2 Packing cases and other shipping containers must be capable of giving adequate protection to contents for a period of one year after despatch from Vendor work-shop (i.e. cases may after receipt at the Plant Site be stored outside before being unpacked).
- 6.3 Two years operating spares are to be protected and packed in such a manner as to ensure a minimum shelf life of four years in an un-air-conditioned warehouse sited in extremely dusty heavy industrial and coastal area with salt pollution location where the maximum shade temperature may exceed -14 +45 C. and where relative humidity reaches 90%.
- 6.4 Consumables items such as bolts and nuts shall be adequately oiled to prevent corrosion.
- 6.5 Other unpackaged items shall be protected by a rust preservative oil, hard drying type. if the nature of the item permits the removal of the deposited tar oil skin by means of petroleum based solvents or the use of hot dip strippable coating.
- 6.6 Any protection for stainless steel parts shall not contain chlorides or harmful metal salts such as Zinc, Lead, Copper. etc. Also marking paint or ink shall not contain similar harmful components.
- 6.7 Electronic and instrument parts shall be packed in sealed clear plastic bags along with a bagged amount of dessicant.

7) Special Storage Items



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 5

- 7.1 Vendor must advise of any spares which cannot be stored under the conditions stated in para. 6.2 and which require special storage conditions
- 7.2 Special Storage Items are to be clearly labelled with storage instructions such as:
STORE IN A COOL DRY PLACE AT C
STORE IN DARK PLACE
KEEP HUMIDITY BELOW %
etc.
- 7.3 Owner must be notified of all such items without delay before order placement since a restricted shelf life may require an amendment to order quantity and an appropriate re-ordering procedure.

ATTACHMENT 1

ERECTION, PRECOMMISSIONING, COMMISSIONING AND START UP SPARE PARTS

1) FURNACES

<u>Gaskets for coil:</u>	50%
-Burner Tiles	100%
-Burner Tips	5%
-Fire eyes	10%
-Gas valves seat	100%
-Solenoid valves	25%

2) EXCHANGERS, REACTORS & DRUMS/TANKS

Gaskets for Girth Flange, M/H& H/H	100%
Stud Bolts and Nuts for the Above	5% (Min. 2 Sets)
<u>Field-Installed Trays:</u>	
-Bolts and Nuts	15% (Min. 2 Sets)
-Washers (Metal and Asb.)	20% (Min. 2 Sets)
-Tray Clamps	10% (Min. 2 Sets)
-Asb. Rope and Tape	25% (Min. 2 Sets)
<u>Field-Installed Internals, Piping and Other Bolted Internals:</u>	
Stud Bolts (Alloy and C.S.)	10% (Min. 2 Sets)
Washers and Nuts	10% (Min. 2 Sets)
<u>Packing:</u>	
-Inert Balls	15%
-Raschig Rings / Slotted Rings	15%
-Gaskets Sets And O-Rings	100%
-Fan for Air Cooler	

3) STEEL STRUCTURE AND PLATFORM

Bridge Crane:

-Bolts & Washers	15%
------------------	-----



-Gashels	10%
-Contactors	5%
-Tension Springs	10%
-Fuse Elements	10%
-Gaskets	10%
-Oil Seals	25%
-Relays	5%
-Collectors	1 set Each Size
-Contact Shoes	1 set Each Size
-Limit Switches	1 set Each Size
-Welding Rod	10%

4) MACHINERY / PACKAGES

Please see the relevant engineering specifications of each equipment for commissioning spares.

Electrical Equipment: See item 9

Instrumentation:

- Control panel	See item 10
- Board instruments	See item 10
- Field Transmitters	See item 10
- Field instruments	See item 10
- Others	0%

5) H.V.A.C.

Bolts, Nuts, Gaslets for Field installation of Pipe/Duct	5%
Rotating Equipment	See item 5
Heat Exchangers	0%
Filter Element	1 Set Each Size/Material
Electrical	See Item 9
<u>Instrumentation:</u>	
-Control panel	See Item 10
-Board Instruments	See Item 10
-Field Transmitters	See Item 10



-Field Instruments See Item 10

-Others 5%

6) SPECIAL EQUIPMENT

Heat Exchanger See Item 2

Rotating Equipment See Item 5

Filter Element 1 Set Each Size/Mat'1

Piping 0%

Electrical See Item 9

Instrumentation:

-Control panel See Item 10

-Board Instruments See Item 10

-Field Transmitters See Item 10

-Field Instruments See Item 10

-Others 0%

7) PIPING

Gaskets, all sizes 20%

Stud Bolts less than 1" 15%

Stud Bolts 1" to 1 7/8" 10%

Stud Bolts 2" and over 5%

Welding Rods 10%

Coating and Wrapping 10%

	Carbon Steel	Alloy/SS	Cast Iron
Pipe 2" and below	15%	4%	0%
3" to 6"	10%	2%	5%
8" and over	5%	1%	5%
(*) Valves 2" and below			
screwed and welded	10%	5%	0%
(*) flanged	2%	2%	0%



(*) Valves 3" to 10"	2%	2%	0%
(*) Valves over 10"	0%	0%	0%
(*) Flanges up to 12"	5%	3%	0%
(*) 14" and over	2%	2%	0%
(*) Fittings welded up to 2"	10%	6%	0%
(*) 2 1/2" to 10"	5%	3%	0%
(*) 12" and over	3%	2%	0%
(*) Fittings Screwed up to 2"			
(*) 3" and over	5%	3%	0%
(*) Flanged all sizes	5%	3%	0%
(*) Hub and Spigot 3" to 12"	0%	0%	5%
(*) 4" and over	0%	0%	3%

Note: as indicated with (*), where the percent gives the quantity consisting of a whole number plus a decimal less than 0.5, the decimal portion will be dropped; where the decimal portion is 0.5 and more, the next higher whole number quantity will be selected.

8) ELECTRICAL EQUIPMENT

Switchgear, Motor Control Centers MV/LV:

-Fuse elements	50%
-Bulb for Signal Lamps	50%

Local Control Panels & control stations:

-Fuse elements	50%
-Bulb for Signal Lamps	50%

Electirc Motors:

-Grease Nipples where applicable	10%+power terminal (in J.B.) 2%
Lighting Fixtures	3%
Flag Relay	2%
Time Relay	2%
Terminal Block	2%
Auxiliary Relays	1%
Moving Contacts	15%



Fixed Contacts	15%
Coils for Contactors	10%
Boucholz Relay	one of each type and size
Thermometer	
<u>Local Control Station:</u>	5%
-Ammeter	
-Push button	5%
-Selector Switch	5%
<u>UPS:</u>	
-Fuse	*
-MCB (miniature circuit breaker)	*
-SCR	*
-DIOD	*
-Transistor	*
-Control cards	*
-Signaling lamps	*
-Batteries	*
<u>Battery Charger:</u>	
-Fuse	*
-MCB(miniature circuit breaker)	*
-SCR	*
-DIOD	*
-Transistor	*
-Control cards	*
-Signaling lamps	*
-Batteries	*
Fire Alarm System	*
Telephone System	*
Paging System	*
Radio System	*
Emergency Diesel Generator	*
Sockets (400V, 230V, 24V)	5%



Plugs(400V, 230V,24V)	5%
Portable 110V AC, 50Hz, with transformer	5% each type
Socket and plug (ex-type)	
Hand lamp 24V AC, 50Hz(ex-type)	10 no.

All special tools, equipment and spare parts required for commissioning and start-up shall be provided.

These are the spare parts that VENDORS shall recommend based on experience.

9) INSTRUMENTATION

For control Panel:

- Bulbs For Signal Lamps	50%
- Fuse Elements	50%

Boards instruments:

- Fuse elements	50%
- Chart paper for recorders	3 boxes each type
- Ink for Recorder	7 sets each type
- Pens for Recorders	50%

Field transmitters:

- Gasket	15%
----------	-----

Field instruments:

- Air pressure regulators	5%
- Temperature Indicators	10% each range
- Pressure gauges	10% each range
Solenoid Valves	2% each type(min 1 set)
Selonoid coils	3 coil each type
Valve positioners	2% each type(min 1 set)
Cable – Single Pair	20%
Cable – Multi Pair	15%
Cable Glands	20%
Junction Boxes – Large	1 min.
Pipe and Tube	10%



Fittings all type 15% each size

Valves 20%

Manifold Valves 10% each size

Cable Tray 20%

DCS:

- Bulbs for signal lamps 50%

- Fuse elements 50%

- Printer paper, Chart paper 4 boxes each type

- Printer Ribbon 10 sets each type

- Blank Floppy disks/magnetic tape cartridge 10 pieces

Gas Chromatograph:

-Filter elements 10%

-Calibration gas cylinders 1 cylinder (100 liter) each type

-Standard gas cylinders 1 cylinder (100 liter) each type

-Other gas cylinders 1 cylinder (100 liter) each type

Other Analyzers:

-Filter Elements 10%

-Calibration Gas Cylinders 1 cylinder (100 liter) each type

-Standard gas cylinders 1 cylinder (100 liter) each type

-Other gas cylinders 1 cylinder (100 liter) each type

10) PAINT AND INSULATION

Paint 10%

Insulation material 10%

Insulation Band & Seal 10%

Insulating Cement 10%

Insulation Sheet Metal 15%

Insulation Wire 10%

11) UTILITY EQUIPMENT

Heat Exchanger, Vessel, Tank and Tower See item 2



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 13

Rotating Equipment	See item 5
Filter Elements	1 Set Each Size/Mat'1
Piping	0%
Electrical	See item 9
<u>Insturmentation :</u>	
-Control panel	See item 10
-Board Instruments	See item 10
-Field Instruments	See item 10
-Others	0%



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 14

ATTACHMENT 2

GUIDELINES FOR SELECTION OF 2 YEARS OPERATION SPARE PARTS

Spare parts for equipment are shown in the following tables:

Table 1 – Spare parts for machinery/packages.

Table 2 – Spare parts for electrical equipment

Table 3 – Spare parts for instruments

Table 4 – Spare parts for pressure vessels and heat exchangers

Table 5 – Spare parts for piping.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 15

TABLE 1

SPARE PARTS FOR MACHINERY / PACKAGES

Note 1: Please see the relevant engineering specifications of each equipment for recommended 2-years spares.

Note 2: Please see tables 2 and 3 of attachment-2 for the electrical and instrument spare parts requirements of machinery / packages for 2 -years.



TABLE 2
MINIMUM SPARE PART FOR ELECTRICAL EQUIPMENT

Item:	Quantities
1) Switchgears:	
MV Fuses	15%
Protecting and Flag Relay	2%
Time Relay	2%
Lamps	10%
Space Heaters	10%
L.V. Fuses	2%
Auxiliary Relays	1%
Moving Contacts	15%
Fixed Contacts	15%
Circuit Breakers(MCCB,MCB)	10%
Contactors	15%
Metering	15%
CT	20%
PT	20%
2)Power Motors Control Center: L.V. Fuses	15%
Time Delayed Relays	8%
Lamps	10%
Space Heaters	10%
Terminal Blocks	7%
Auxiliary relays	To be determined later in conjunction with the equipment vendor
Contactors	
Thermal	
overload Relays	
Isolators for each trip	
Current Setting	11%



	Motor Circuit Brakers					
	Complete Unit for Each					15% (min 1)
	Type & Size (incoming & bus tie)					
	Moving Contacts	20%				
	Fixed Contacts	20%				
	Metering	15%				
	CT	20%				
	PT	20%				
	Circuit Breaker	one per each type				
3) Transformers :	Bucholz Relays	one each type & size				
	Thermometer	10%				
	Bushing HV/LV	50%				
	Measuring and control devices	20%				
	CT of natural resistor	10% (of each type)				
4) Power Material:	a) Local Control Stations	5%				
	b) Sockets 400V AC	10%				
	c) Plugs 400V AC	10%				
5) Lighting Materials:	a) Switches	10%				
	b) Fuses	30%				
	c) Sockets (230 V, 24V)	10%				
	d) Plugs (230 V, 24V)	10%				
	e) Lighting Fixtures	10%				
	f) Ballast Lamps	5%				
	g) Lamps	20%				
	h) Portable 110V AC, 50Hz with transformer (ex-type) socket and plug	10%				
	i) hand amp 24V AC, 50Hz (ex-type)					
6) Motors:						
No of Machines	1	2	3	4	5	more
set of Bearing	1	1	1	2	2	40%
Fan, terminal, blocks, space heater (MV) per type						5%



7) UPS:

Fuses	30%
MCB(miniator circuit breaker)	15%
SCR	30%
Signaling lamps and protection device	15%
DIOD	10%
Transistor	30%
Control cards	one per each type
Batteries	5%
Isolator switch (make before break)	one per each type

8)Battery charger:

Fuse	30%
MCB	15%
SCR	30%
DIOD	10%
Signaling lamp	15%
Control cards	one per each type
Batteries	5%

9)Telephoned system

*

10) Paging system

*

11) Radio system

*

12) Fire alarm system

*

13) Neutral grounding system

*

14) Bus duct

*

These are the spare parts required for two years operation. Vendor shall recommend the spares based on their experience.

(*)The Quantities indicated are only preliminary estimation, so the firm quantities will be specified later in conjunction with recommendations of equipment vendors.

The quantities which shall be ordered by VENDOR shall be approved By OWNER.



TABLE 3
SPARE PARTS FOR INSTRUMENTS

<u>Item</u>	<u>Quantities</u>
Flow Instruments	To be determined
Level Instruments	in conjunction with the equipment Vendor
Temperature Instruments	(based on Vendor's experience on similar type of plant)
Pressure Instruments	
Analyzers	
Control Valves : Valve Bodies	None unless service is corrosive or erosive. For corrosive or erosive services, shall be determined in conjunction with the equipment Vendor.
Valve Plugs	1 of each size/min. 15% or 1
Seat Rings	1 of each size/min. 25% or 1
Actuators	10% (min 1 per type / size)
Valve Stems	1 of each diameter. These vary in length depending on valve size. Purchase the longest of each dia. These can be cut to the correct size.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 20

Stem packings	3 boxes of each size used/min. 20%
Grease	3 boxes of each type used/min. 20%
Diaphragms	1 of each size used min. 20%
Blank Orifice Plates	
Dial Thermometers	
Manual Loading Stations	
Instrument Air Filters (Regulation sets)	
Pressure Gauges	
Pressure Switches	
Plug-in Assemblies for Elect. Instr.	
Plug-in Assemblies for Pneum. Instr.	10%
Seal, Condensate and Vent Pots	(for all)
Solenoid Valves	
Thermocouples	
Thermowells	
Signal Lights	
Pneumatic relay and/or boosh(if any)	
Valve Positioners	10%
I/P Convertes	(for all)



DCS/ESD/PLC (for each system the following items):

- I/O cards 5% for each type (min 1 for each type)
- Main cards one set
- Power supply (AC, if any) one set
- Power supply (DC, if any) one set
- Barriers cards 5% for each type (min 1 for each type)

On-line gaschromatographs:

- Main mother board one set
- Column one per type



TABLE 4
SPARE PARTS FOR
PRESSURE VESSELS & HEAT EXCHANGERS

<u>ITEM</u>	<u>QUANTITIES</u>
1) Heat Exchangers-Shell and Tube (U Type included)	
- Tubes	Straight tubes sufficient to retube the largest bundle of each tube size and material.
- Bolts and nuts	(Special or Alloy) of each exchanger minimum one set.
- Gaskets	200%
2) Pressure Vessels	
- Gaskets	200%
- Bolts and nuts	10% (Special, Alloy or size 2" diam or greater), minimum one set.
3) Air Cooled Exchangers	
- Plugs	Steel 1%; Non-ferrous 2% (min. one number)
- Plug Gaskets	5% (min. one number)
-Cover plate gaskets	10%
-Tube support boxes	10% (min. one number)
4) Number of Air-fin Coolers Using Part.	1 2 3 4 5 6 7 or more
(i) V-Belts-Sheaves (Driven & Driver)	0 0 0 0 0 0 1
- Set of Belts	1 2 3 4 5 6 100%
(ii) Fan Shaft Bearing (Upper & Lower)	1 1 1 2 2 3 50% of No of Air Fins
(iii) Speed Reducers (Gear Box) Shaft	



and pinion

- Bearing Set 1 1 1 2 2 3 50% of No
of Air Fins

- O-Rings, Seals, Lock-washers, Locknuts

(iv) Couplings – Complete Coupling,

-Flanges, Gaskets, Seals 1 1 1 1 1 1 1

(v) Fan Assemblies 1 2 3 4 5 6 100% of No
of Air Fins

-Automatic Pitch Control

-Hub Assembly Parts Guide Bushing,

-Pitch Blocks, O-Rings, Clam Gaskets

(vi) Bolt Assemblies, Fork, Pins 1 2 3 4 5 6 100% of No
of Air Fins

(vii) Flexible Hose, Rotary Union 1 1 1 1 1 1 2

(viii) Automatic or Manual Adjustments:

- Blade Retention Clamps, Pitch, 1 1 1 2 2 2 30% of No
of Air Fins

Change Forks, Puch Rod, Stub,(with pilot tubes),Bearing
Retainer Rings

(ix) Spring Housing Gasket, Diaphragm, 1 1 1 1 2 2 20% of No
Blade Retainer Ring, Thrust of Air Fins
cover Gasket

(x) Hub Assembly with Blades 0 0 0 0 0 0 1 (b)

(*) NOTES

(a) Quantities shown are for each size and type of part

(b) Twenty units or more

(c) The parts listed are the principal parts only. Other parts shall be considered for recommendation in quantities consistent with the above table.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 24

5) Plate type Exchangers

Plat gasket	100%
Flow Plate	10%
Nozzle Gasket	200%
Glue (1 Kg. Pot)	1
Special spanner tool	1 for each size/type



TABLE 5
SPARE PARTS FOR PIPING

<u>Item</u>	<u>Quantities</u>
Valves up to 1 ½"	5% for each size, type and material complete units
Valves from 2" to 6"	2% (minimum 2 pieces) for each size , type and material
Valves above 6" to 10"	1 piece for each size, type and material complete units
Valves above 10"	1 only if installed valves quantity is more than 30
Valves up to 10"	
Gland packing and bonnet gasket	10%
Valves from 2" to 10	2 for each type , size and material set of changeable inner parts
Valves above 10"	1 for each type, size and material
Set interchangeable inner parts: bonnet gasket and stem packing	
Piping gaskets and bolts set for each size and type	10%



ATTACHMENT 3

**GUIDELINES FOR THE COMPILATION OF SPARE PARTS
INTERCHANGEABILITY RECORD (SPIR)**

The manufacturer/supplier shall complete the following parts of the SPIR form as per listed sequence and in the English language:

- Line 1: PLANT registration/item number or tag number of equipment/instruments, etc. as stated on requisitions and/or Purchase Orders.
- Line 2: Mode, type or other identification of equipment/instruments, etc. ordered.
- Line 3: Serial number of each equipment/instruments, etc. ordered.
- Line 6: Purchase Order number reference of equipment/instruments, etc.
- Line 6a: Unit of measure, i.e. No., set, pair, kg, roll, etc.
- Line 4: Number of identical equipment, etc. of particular model or type being supplied against Purchase Order number mentioned under line 6.
- Line 8: Parts description of all component parts considered by supplier as being required for maintenance of equipment, etc. listed in lines 1, 2 and 3. However, all items specified in the appropriate equipment list shall be shown separately.
- Col. 9: Drawing number/part number as per supplier's parts list or drawing.
- Col. 10: Part identification number showing interchangeability within equipment manufacturer's organization.
- Note: Identical parts, regardless of whether they have the same part number or drawing number, should be shown only once (see also line 5).
- Col. 11: Material specification of parts listed in column 8.
- Line 5: Enter in appropriate square the number of parts (listed in column) fitted in each applicable unit. For groups of identical units, denote quantity per unit below quantity shown in line 4.
- Col. 7: Total number of identical parts listed in column 8 for all equipment, etc. For identical units multiply quantity in line 5 by number in same column in line 4 and enter overall total of each line in column 7.



- Col.12: Total spare parts recommended for 2 years operation and commissioning period.
- Col.18: Unit price (up to two decimals) for recommended spare parts of column 12.
- Col.20: Original identification number for all items of third party manufacture (bought-out items) such as : ball/-roller bearings, mechanical seals, couplings, bearing lock nuts, bearing lock washers, V-belts, bolts/nuts, gaskets, O-rings, and the like. These items should be fully identified by manufacturers' numbers, types, sizes, etc.
- V – for: Vital equipment, a breakdown of which would mean an immediate and serious interruption of vital operations in field or plant and with which no risk in the ordering and stocking of spare parts can be justified.
- E – for: Essential equipment, engaged in primary operations, but with which a calculated risk can be taken in ordering and stocking of spare parts.
- A – for: Auxiliary, general purpose and stand-by equipment, for secondary operations, the temporary lack of spare parts would not have a serious effect.
- Under this heading also comes the equipment of which there is a large number of units in used, thus ensuring a sufficient degree of protection in case of failure of one or more units.

The Owner MESC project team should complete the following part of the SPIR form

- Col.16: For allocation of the final MESC number.
- Col.17: For the classification of spare parts, i.e.:
- C – for: Parts wearing out or deteriorating during normal operations, thus shown a fairly regular consumption.
- Q - for: Parts not normal stocked, but ordered on request only.
- I - for: Insurance items.
- O - for: Temporary code number.

THE VENDOR SHALL COMPLETE THE FOLLOWING PART OF THE SPIR FORM:

- Col.13: VENDOR'S recommended spare parts for 2 years operation.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 28

- Col.14: VENDOR'S recommended spare parts for the precommissioning, commissioning and start-up period.
- Col.22: This column has to be filled out for the respective parts purchase order-item reference. This number should be tagged to the respective material for easy identification upon receipt at site.
- Col.19: Total price (up to 2 decimals) of the spare parts for 2 years operation and the commissioning period based upon the quantities approved by the OWNER'S Project Engineer (see column 15)

NOTE: Columns 15, 17 and 21 should be left blank, these are for OWNER'S use.

THE OWNER'S PROJECT ENGINEER SHOULD COMPLETE THE FOLLOWING PART OF SPIR FORM:

- Col.15: Final quantity to be ordered and Approved by the OWNER'S Project Engineer.
- Col.21: This column has to be used to indicate the equipment class, i.e.

IMPORTANT NOTE:

The necessary provisions shall be made to fix the prices of spare parts for all equipment and materials for future purchasing of the spare parts by OWNER more than which shall be purchased by VENDOR for two years operations of the PLANT all EQUIPMENT AND MATERIALS for future purchasing of the spare

ATTACHMENT 4

SPIR Form:

پیوست شماره 5: برگه ضمانت کیفیت (گارانتی) محصولات

پیوست شماره 6: برگه ضمانت خدمات پس از فروش

پیوست شماره 7: مشخصات کلی ابزار دقیقی (Instrumentation General Specification)



National Petroleum Company Co.
Research and Technology

PP-PE Pilot Plant

Document No. : 000-SPC-A4-IN-0009

Rev.: 01

Title: INSTRUMENTATION GENERAL SPECIFICATION

Page: A

PAGE	REV.	01	2	3	4	5	6	PAGE	REV.	01	2	3	4	5	6	PAGE	REV.	01	2	3	4	5	6
A	X																						
1	X																						
2	X																						
3	X																						
4	X																						
5	X																						
6	X																						
7	X																						
8	X																						
9	X																						
10	X																						
11	X																						
12	X																						
13	X																						
14	X																						
15	X																						
16	X																						
17	X																						
18	X																						
19	X																						
20	x																						
6																							
5																							
4																							
3																							
2																							
1	Sep.13.2021	K.Asgari/ V.Vasfi		M.Nazeri Nasab		M.Rajabian		M.Asadi		M.Asadi		IFA											
Rev	Date	Prepared By		Checked By		Approved By		Approved By		Approved By		Status											
				Discipline				PEM		PM													

Document Revisions



National Petroleum Company Co.
Research and Technology

PP-PE Pilot Plant

Document No. : 000-SPC-A4-IN-0009

Rev.: 01

Title: INSTRUMENTATION GENERAL SPECIFICATION

Page: 1

TABLE OF CONTENTS

1. SCOPE
2. TECHNICAL REQUIREMENTS
3. BASIC DESIGN VALUES
4. MEASUREMENT UNITS
5. INSTRUMENT GENERAL REQUIREMENTS
6. CONTROL ROOM
7. LOCAL PANELS
8. ALARMS AND SHUTDOWNS
9. CONNECTIONS
10. FLOW INSTRUMENTS
11. LEVEL INSTRUMENTS
12. PRESSURE INSTRUMENTS
13. TEMPERATURE INSTRUMENTS
14. CONTROL VALVES
15. PRESSURE RELIEF VALVES
16. ANALYZERS



1. SCOPE

This specification covers the minimum general requirements for the instrumentation and control system design for PP-PE Pilot Plant in NPC-RT plant, Arak, Iran.

For instrumentation systems and components, as far as mechanical and electrical characteristics and performances are concerned, the present general specification will be used, and specific detailed specifications will be issued for each system and/or component. In case of discrepancy, information contained in the particular instrument specification and data sheet will take precedence over the general specification. The instrument design specification will be updated to include all the requirements of the project during detail engineering and is subject to the client's approval.

Any deviation from the present specification at any stage of the project will be clearly stated to the Contractor/Client by the Vendor or the Bidder. If any variation or addition is required in individual cases, they will be shown on material data-sheets. Any deviation from data-sheets or specifications, must be approved in writing by Contractor/Client, otherwise the equipment will be rejected at factory inspection.

2. TECHNICAL REQUIREMENTS

- 2.1. Instruments and control equipment will be specified on standard data sheet formats and by written detailed specification and description.
- 2.2. Design methods and materials will be mainly in accordance with **NPCS** standards while the latest editions of the following standards as well as contractual codes and requirements are applicable:

- ISA Instrumentation Standards:

- ISA S 5-1 : Identification and Symbolization 1992,
- ISA S 5-2 : Graphic symbols for logic diagrams 1992
- ISA S 5-3 : Graphic symbols for distributed control/shared display instrumentation, logic and computer systems
- ISA S 18-1 : Alarm and sequences
- ISA S 75-1 : Control valve sizing, equations
- ISA S 75-3 : Face to Face dimensions of globe type control valves
- ISA S 75-19 : Hydraulic testing of control valves 1991
- ISA S 61.1 : Procedures for executive function for process input output and bit manipulation
- ISA S 61.2 : Procedure for file access and the control of file contention.
- ISA RP 60.8 : Electrical guide for control centers

- ANSI Standards:

- ANSI-B 16-5 : Steel pipe flanges, flanged valve fitting edition + B16-5 a (1992)
- ANSI-B 16-10 : Face to face and end to end dimensions of valves
- ANSI-B 31.3 : Process Piping
- ANSI-B 1-20.1 : Pipe threads
- ANSI/FC 70.2 : Control valve seat leakage
- ANSI/MC 96-1 : Temperature measurement thermocouples
- ANSI-B16.37 : Hydro static Testing



· ASME & ASTM Standards:

- ASME, Div 1, : Hydraulic test for safety relief valve, Sect. VIII
- ASTM : Material specifications

· ISO Standards:

- ISO 5167 : Flow measurement with orifices, nozzles and venturi tubes

· BS Standards

- BS 1042 : Methods for measurement of fluid flow in pipes (where not covered by ISO 5167)
- BS 6739 : Instrumentation in process control systems installation design and practice (1986)
- BS 5308 : Instrumentation cables

· IEC Standards:

- IEC 751 : Industrial platinum resistance - thermometer sensors (1983 + AMD 1 1986)
- IEC 947 : Low voltage switchgear and control gear (1990)
- IEC 61131 : Programmable controllers Programming languages.(for DCS/PLC)
- IEC 61158 : DCS/PLC
- IEC 529 : Mechanical Protection degree for enclosures
- IEC 60548 : Industrial Thermocouples- thermometer sensors (for T/C)
- IEC 60751 : Industrial Thermocouples- thermometer sensors (for RTD)
- IEC 337-1 : Switches Contact Rating

· API Standards

- API-RP 551 : Process measurement Instrumentation
- API-RP 554 : Process Instrumentation and control
- API-RP 555 : Process Analyzers
- API-RP 526 : Dimensions of Flanged type Pressure Safety valves
- API-RP 526 : Valves Leakage Limits
- API-RP 500 : Hazardous Area classification

· Other Standards

- NACE- MR-0175 : In Sour Corrosive Services
- AWS D1.0 : American Welding Society for steel structures and Instrument welding.
- CENELEC-50014 to 50020 : Protection of Electrical apparatus in explosive area
- NAMUR : Proximity switch mounting and solenoid valve connection.
- IPS -G-IN-160 : Engineering & material standard for control valves
- IPS-C-IN-160 : Construction & installation standard for control valves

Plant control and process monitoring as well as all operational interlocks and sequences shall be performed by DCS.



Document No. : 000-SPC-A4-IN-0009	Rev.: 01
Title: INSTRUMENTATION GENERAL SPECIFICATION	Page: 4

- 2.3. When it is commercially available all field instruments shall have a protection of at least IP-65 or better according to IEC 529. In case of non-availability of IP-65 or better, other commercially available IP ratings will be reviewed and approved case by case by the client. Transmitter enclosures shall be rated IP-65 as minimum.
- 2.4. All instruments will be tested and calibrated by the Manufacturer before delivery and a calibration sheet will be supplied with each instrument.
- 2.5. In order to achieve a fail safe design all Alarm, safety and interlock contacts will be closed and solenoid valves and relays shall be energized during normal plant operation.
- 2.6. The actions of valves will be designed in such a way as to keep the plant under safe conditions in case of main electric power or instrument air failure.
- 2.7. Instrumentation system shall be basically electronic type. Final control elements and local loops will be pneumatic. Minimization of pneumatic instruments to be considered. Control valves shall have electro-pneumatic positioner. Electronic transmitters shall be Smart type.
- 2.8. Electronic signals shall be 4~20 mA as standard. Isolated outputs to be considered where required. All transmitters shall be Smart type with HART protocol. Communicator shall be supplied by manufacturer.

Pneumatic signals shall be 0.2-1 Bar.
Solenoid valves will be 24 VDC powered.
Cable Entry size shall be generally M20X1.5 mm ISO.
- 2.9. Electronic instruments and circuit boards will be tropicalized against moisture, fungus growth and insect attack and will have a high degree of environmental protection for such a duty as well as protection against corrosive, saline etc. atmospheres.
- 2.10. Electronic instruments construction material of wetted parts shall be in accordance with piping class requirements. Wetted parts shall be, as minimum, AISI 316. Where AISI 316 is not suitable for the application other compatible materials with process fluid at service conditions of pressure and temperature shall be selected as Hastelloy C, Titanium, Monel, etc.
- 2.11. Electronic instruments installed in classified area shall be selected in accordance with CENELEC or IEC code requirements. Electronic instruments in hazardous area shall be basically Intrinsically safe. Where Intrinsic safe instruments are not available Explosion proof or purged instruments shall be selected. Certification shall be provided by a recognized laboratory.

3. BASIC DESIGN VALUES

3.1. All field equipment will be suitable for operation in a corrosive, dusty, saline etc. Atmosphere.

3.2. SITE CONDITION:

- Minimum temp. : -28°C
- Maximum temp. : +44°C
- Maximum humidity : 86% in January



3.3. Critical instruments systems and control systems will be supplied by 110V 50Hz single phase from UPS and 24 VDC.



The UPS (un-interruptible power supply) located in the control building, or in the electrical substation (UPS room) will deliver:

- Frequency : 50 Hz \pm 0.5 Hz
- Voltage : 110 VAC \pm 10%

The UPS is limited to feeding the DCS, analyzers and other specific instruments when required. Instruments such as transmitters, transducers, converters, switches... will be powered by 24 VDC. Power supply will normally be supplied from the DCS or other systems otherwise 24 VDC power supply will be used for solenoid valves. No voltages other than 24 VDC, and 110 VAC will be used for systems supply except if clearly specified by the Contractor.

3.4. Instrument air supply shall have the following characteristics as minimum:


- Normal Pressure : 7 Barg
- Minimum Pressure : 6.5 Barg
- Design Pressure : 10.5 Barg
- Temperature : Ambient
- Dew Point : -40 °C
- Dust,Oil,Water free

4. MEASUREMENT UNITS

- Density : kg/m³ (kilograms per cubic meter)
- Level : m,cm,mm
- Viscosity : % of range (for indication)
- Liquid : cSt
- Gas : cp
- Other units:
 - Rotation : rpm (revolutions per minute)
 - Power : kW or kVA
 - Voltage : V (volt)
 - Electrical current : A (ampere)
 - Pressure : barg
 - Flow : m³/hr
 - Mass flow : kg/s , kg/hr
 - Temperature : °C
 - Time : Sec,Minute
 - Distance : Meter



5. INSTRUMENT GENERAL REQUIREMENTS

- 5.1. For transmission and control, electronic loops will use a standard 4-20 mA signal. This is based on smart transmission of signal with HART protocol. The electrical instrument signal will increase in level in increase of the process variable.
For temperature instruments, refer to chapter 13 (TEMPERATURE INSTRUMENTS).
- 5.2. Instrument will in general be of the electronic type.
- 5.3. Transmitters may be provided with integral or separate local digital indicator per process requirements.
- 5.4. Millimeters and receiver gauges will be visible and readable at the associated control valve assembly or at the location indicated on the detailed engineering P&ID.
- 5.5. Process control valves with pneumatic actuators will be actuated via I/P positioners (integral with the control valve).
- 5.6. Limit switches shall be proximity type (NAMUR type) 
- 5.7. The component parts of instruments will be of material suitable for the process. Movements or wetted parts for instruments will be stainless steel or better when specified. Materials exposed to the process fluid will be in accordance with the fluid conditions (pressure, temperature, and corrosion). This will be reviewed case by case during detail engineering and is subject to the Client's approval.
- 5.8. All components, particularly if containing electric contacts, will be vibration resistant. All components will be constructed of material which is resistant to corrosion by the process fluid with which they are in contact internally and to the ambient air environment to which they are externally exposed (corrosive, dusty, saline etc. atmospheres).
- 5.9. Instrument cables (analog (4- 20 mA), digital signal, RTD and thermocouple cables) will be run separate from power supply cables from the field junction boxes to the control room.
- 5.10. cables carrying intrinsically safe shall be routed separately with non-IS signal carrying cables.
- 5.11. Instrument air manifolds shall be used for distributing the instrument air to the consumer. Min 20% spare tapping shall be considered in each manifold.
- 5.12. Control actions shall be done as much as possible in the DCS system but Local controllers if any will be specified with one or more of the following actions; the control action will be easily reversible.
- Proportional
 - Integral or reset
 - Derivative or rate.
- Generally, temperature controllers will be three term controllers; flow pressure and level will be two term controllers. Integral and derivative actions will have an off position where possible.
- 5.13. Each pneumatic user shall be provided with a 1/2" block valve. the material of block valve shall be 316 SS. An air filter regulator with pressure gauge shall be considered for each user. For control valves the pressure gauge will be installed on the positioner.



Document No. : 000-SPC-A4-IN-0009	Rev.: 01
Title: INSTRUMENTATION GENERAL SPECIFICATION	Page: 7

- 5.14. All indicator dials will be white with black graduations. Electronic indicators will be as per supplier standard.
- 5.15. All field instruments will be provided with a suitable stainless-steel nameplate bearing whenever applicable, the following information:
- tag number
 - Manufacturer's name, model and serial number
 - Maximum allowable pressure / temperature for the parts concerned
 - Scale factors
 - Materials of the fluid wetted parts
 - Power voltage and frequency or instrument air pressure
 - Calibrated range
- All indoor instruments will be provided with at least one nameplate for operating and maintenance purposes.
- 5.16. Final drawing and certificates will be issued in the English language.

6. CONTROL ROOM

- 6.1. The main apparatus installed in control room is the cabinets of Distributed Control System (DCS) package PLCs and operator stations.
- 6.2. Cable cross wiring marshalling cabinets, DCS process interface and controller cabinets, DCS historical modules and network modules, marshalling cabinets, electrical distribution panel will be installed in an auxiliary room adjacent to the PCR (process control room).
The DCS operator stations / engineering stations and associated printers will be located in the PCR (process control room).
The UPS cabinets and the UPS batteries will be located in the UPS room and battery room respectively which is in the scope of Electrical.
- 6.3. All instrument cable entries into the control room and auxiliary room from the outside will be via PVC conduit, which will be sealed in order to prevent the ingress of gas or vapors.
- 6.4. No process fluids will be piped into the control room or the auxiliary room.
- 6.5. The process control room and the auxiliary room will be air conditioned, and classified as a general-purpose (unclassified) electrical area. They will also have a false floor for routing of cables and a false ceiling for proper lighting and air conditioning ducting.

7. LOCAL PANELS

All functions for process control of the plant will be done through the Distributed Control System. However, local panels may be provided for main EQUIPMENT, which will be normally controlled by programmable logic controllers (PLC) located in the auxiliary room. The local panels (installed near the EQUIPMENT) will include push buttons, lamps and indicators necessary for local operations, start-up and maintenance (e.g. heater...) and will be the Vendor's standard design.



8. ALARMS AND SHUTDOWNS

- 8.1.** Alarms and shutdown systems will be generally designed to be fail-safe.
- 8.2.** The control systems will be designed in order to protect against tripping from random or spurious signals on deviation from normal operating conditions i.e. to prevent noisy shutdown.

9. CONNECTIONS

- 9.1.** Instrument connections and tapping points on vessels or pipes are defined on table #1.
- 9.2.** Plant pneumatic signal lines will be 1/4" OD stainless steel tubing and fittings.
- 9.3.** All cable runs between the control room and the plant will be made with multi core/pair cables and connected to the field junction boxes.
Cable specifications from the auxiliary room to the field are:
Electronic signals: multi-pair, each pair twisted and screened, overall screened, armored PVC insulated.
On-off signals : multi core, overall screened, armored PVC insulated
- 9.4.** The single pair cable specifications are the following:
Electronic signals single pair, twisted, screened, armored, PVC insulated
On-off signals Two Core, armored, PVC insulated, overall sheath
Cable runs in the main control room as well as in the auxiliary room and the plant, will be tagged at each end for identification purposes. For the cable runs in the plant, cable markers will be provided at specific distances to indicate the route of the cable.
- 9.5.** Multi-strand copper wires for single pair or triple conductor cables will be used in the auxiliary room, and for cables between field junction boxes and instruments. For other connections, solid copper conductors are preferred.
- 9.6.** A maximum voltage drops of 10% at normal loading conditions will be taken into account in the sizing of cables.
- 9.7.** 20% spare cores are required in multi core cables and for spare cable inlets to the junction boxes. All spare conductors will be connected to terminals.
- 9.8.** Minimum 20% spare space is required in junction boxes.
- 9.9.** Screwed terminals will normally be used. Test/disconnect terminals will be used for the connection of field cables in the marshalling cabinets.
- 9.10.** Accuracy rating for instruments.

The rated accuracy of individual instruments will be as listed below.

These tolerances will apply to the full-scale reading of the particular instrument, referring to repeatability a deviation of characteristic curve, at constant ambient temperature and a steady power supply (for instruments accuracy values marked with (*) referred to the measured value).



Primary devices:

Standard orifice plates and Venturi tubes (>50% of measuring range)	71.5 %
Resistance thermometers Pt 100 DIN	70.6 %
Thermocouples	70.75 %

Field indicators:

Pressure gauges	71.6 %
Pressure gauges (flanged connections)	72.5 %
Liquid expansion thermometers	71.0 %
Bimetal thermometers	72.5 %

Flow meters (> 10% of measuring range)

Magnetic flow meters	71.0 %
Turbine flow meters	70.5 %
Positive displacement meters	70.5 %
Rotameters	71.6 %
Rotameters with PTFE lining	72.5 %
Rotameters (for purge systems)	74.0 %
Coriolis flow meters for gas streams	(*)70.5 %
Coriolis flow meters for liquid streams	(*)70.2 %
Vortex flow meters for gas or vapour streams	(*)71.5 %
Vortex flow meters for liquid streams	(*)71.0 %
Thermal mass flow meters	(*)72.0 %

(*) accuracy rating referred to the measured value

Transmitters

Temperature transmitters for resistance thermometers/thermocouples	70.6 %
Pressure transmitters	70.2 %
Differential pressure transmitters	70.2 %
Level transmitters (displacer type)	71.0 %
Level transmitters (radar type)	710 mm 70.3 %

I/P transducers	70.6 %
A/D or D/A converters	70.2 %

Control room instruments

Line recorders	70.5 %
Dotted line recorders	70.5 %
Pneumatic indicators	70.5 %
Electric indicator	70.5 %
Factors influencing the measuring accuracy:	



10.FLOW INSTRUMENTS

10.1. ORIFICE PLATES

In general, flow measurement will be made by means of square-edged concentric orifice plates mounted between flanges with flange taps, in accordance with ISO 5167 recommendations and relevant codes and standards.

Eccentric orifices may be used in horizontal lines to avoid accumulation of liquid when vent or drain holes (maximum 2 mm diameter) are not specified or with fluids containing solids. Quarter circle or conical entrance orifice plated may be selected when a square-edge type is not appropriate.

Orifice plates shall be in AISI 316 as minimum for general service. Other materials shall be used when AISI 316 is not suitable for the service conditions; The material to be used will be specified on Piping material specification and/or instrument data sheet.

Orifice plate beta ratios shall be between 0.25 to 0.7.

Orifice meter runs shall be used for line size lower than 2".

Integral Orifice assemblies shall be used for to measure flow rates which can't be measured accurately with the minimum size of meter runs.

Orifices will be sized for the following standard instrument DP range:

- 12.5, 25, 50, 62.5, 125, 250, 500, 1000, 1250 mbar.

In order to achieve a minimum pressure loss in the system, the maximum allowable beta value (d/D) will be selected for each orifice.

Straight run pipe requirements shall be in accordance with ISO 5167 or vendor requirements. Straightening vane can be used to reduce upstream pipe lengths.

10.2. VENTURI AND FLOW NOZZLE

Venturi tubes may be selected for non-viscous fluids when relatively high accuracy is required with a low-pressure drop in the system and or short minimum straight run piping requirements.

10.3. PITOT TUBES

Pitot tubes or modified pitot tubes (Annubars) may be selected for large flows of clean fluid to achieve minimum pressure loss in the system where the pressure drop through an orifice is uneconomical or flow measurement accuracy is not critical.

10.4. MAGNETIC FLOW METERS

Magnetic flow meters may be used for dirty liquids having conductivity higher than 5 mS/cm.

10.5. VORETX FLOW METERS

Vortex and other non differential flow transmitters shall be used only in special applications as shown on P&IDs.

10.6 MASS FLOW METERS

Generally, Coriolis or thermal Mass flow meters shall be used for mass flow measurement. Installation of flow meters shall be in a manner as to ensure that the entire assembly is fitted with the respective process fluid.



Document No. : 000-SPC-A4-IN-0009	Rev.: 01
Title: INSTRUMENTATION GENERAL SPECIFICATION	Page: 11

10.7 DIFFERENTIAL PRESSURE TRANSMITTERS

Flow measurement signals (e.g. for indication/recording / totalizing / trending etc.) will generally be connected to the DCS:

Transmitter measuring principles used with orifice plates, venturi tubes, pitot tubes, etc. will be in accordance with the selected manufacturer's standards e.g. diffused silicon strain gauge, capacitance etc....

The transmitters will be of the "smart" type (HART Protocol) with accuracy better than 0.2%.

The sensing element material will be AISI 316 minimum.

Electronic transmitters will be furnished with test terminals and by-pass diode to facilitate field testing without disconnection or connection of a field mounted signal indicator (MV-Meter) either integral with or remote from the transmitter. Transmitters shall be reverse polarity protected.

10.8 FLOW SWITCHES

Direct-acting flow switches will not generally be used for process fluids. Switch actions will normally be made via normal measuring means with the switch function on the transmitter output or as threshold contact type on local flow indicator.

The switch function will be adjustable. Switches will have changed-over volt-free snap-acting contacts.

Further detailed data and information will be provided when specifying the instruments

10.9 LOCAL FLOW MEASUREMENT:

For local measurement, variable flow meters or differential head type elements with DP pressure indicator will be used.

10.10 P/T COMPENSATION:

Whenever high fluctuation of pressure or temperature of the process fluids are expected, P/T compensation shall be considered.

11 LEVEL INSTRUMENTS

11.1 DISPLACEMENT TYPE

External displacer-type (torque tube type) transmitters will generally be used for level ranges lower than or equal to 1219 mm (48"). Adequate valves will be provided for maintenance purposes.

The following standard ranges will be used:

- 356, 813, 1219, 1524, 1829, 2134: mm
- 14, 32, 48, 60, 72, 84: inch

Displacement type level instrument shall not be used with viscous, turbulent, solidifying, corrosive conditions or liquids that boils at ambient temperature.



Internal displacer type (displacer hanging in vessel) will only be used where conditions dictate that the level shall be measured internally and where turbulence will not detach the displacer. and they shall be avoided practically on vessels that can't be isolated without shutting down a part of the plant.

Extensions will be considered for services above 200°C (fins).

Connections will be in general side-bottom mounted. The housing will be rotatable. Left-hand type or right-hand mounting position of housing will be in accordance with the installation requirements. Drain valves shall be considered for external level transmitters.

11.2 DIFFERENTIAL PRESSURE TYPE

In general, differential pressure transmitters will be used to measure liquid level where the range of level to be measured is greater than 2000 mm and where this type of instrument is preferred to a displacer type like steam drum level.

Transmitter measuring principles will be in accordance with the selected manufacturer's standards, and preferably same as those differential pressure transmitters used for flow measurement.

External differential pressure instruments shall be installed lower than the lowest vessel connection and higher than the highest vessel connection depending on the process fluid or selected purge method.

The transmitters will be of the "smart" type with accuracy better than 0.2%. The sensing element material will be AISI 316 minimum.

Electronic transmitters will be furnished with test terminals and by-pass diode to facilitate field testing without disconnection or connection of a field mounted signal indicator (MV-Meter) either integral with or remote from the transmitter. Transmitters will be reverse polarity protected. D/p transmitters will have zero elevation or suppression as required.

11.3 DIAPHRAGM SEAL AND CAPILLARIES

For measurement of viscous fluids, fluids containing solids, highly corrosive fluids or where temperature changes may influence the fluid conditions, the use of diaphragm seals and capillaries may be considered. Capillaries for remote seal applications will be kept as short as possible and will not exceed 6 m. When remote seal systems are specified, the fill liquid shall be selected to agree with the process requirements, and shall not affect a change in the instrument calibration when subjected to a calibration at ambient conditions versus normal process condition.

11.4 LIQUID LEVEL SWITCHES

Depending on the process requirements, level switches shall be of the float type, tuning fork, or capacitive sensor type. Switches without mechanical contacts are preferred. For process connection refer to the Table #1 on the attachment.

11.5 SPECIAL LEVEL MEASUREMENTS:

Capacitive level transmitters may be used as an alternative for fluids of high viscosity and for bulk materials.

Ultrasonic or radar methods will be used for tank gauging if physical condition of the process fluid allows this.

Radioactive level measurements will be used in the polymerization reactors only, as in this case it is the only possible method of measurement.



Document No. : 000-SPC-A4-IN-0009	Rev.: 01
Title: INSTRUMENTATION GENERAL SPECIFICATION	Page: 13

Load cell assemblies normally will be used for silo measurement. In that case the silo shall be installed stress free.

11.6 LOCAL LEVEL INDICATORS:

Local level indicators with all metric construction and magnetic coupling of follower magnet is generally preferred. For process connection refer to Table #1.

The instruments will have vents and drains according to manufacturers standard. In justified exceptional cases and as explicit shown on the PID, permanently attached valves and fluid discharge lines will be used and installed in accordance with the piping specification.

Local tank level gauges with a large measuring range will consist of level transmitters with local indicators.

11.7 REMARKS

- There will be no local recording
- Installing two or more devices on the same connections will be avoided.

12 PRESSURE INSTRUMENTS

12.1 GENERAL

Pressure-measuring elements will be minimum AISI 316 stainless steel or comply with piping material if more resistive material required.

Pressure Instruments will have over-range protection to minimize the effect of over pressure in order to avoid a shift in calibration. Instruments, which can be exposed to vacuum, will have under range protection. Over-range protection will cover the Design pressure of line.

Pulsation dampeners or glycerin-filled systems will be supplied for all pressure instruments and gauges in vibrating or pulsating services.

Differential-pressure instruments will generally be capable of withstanding the full static pressure without loss of calibration.

For the measurement of absolute pressure, differential pressure transmitters will be used with an absolute vacuum reference chamber.

12.2 PRESSURE GAUGES

Bourdon-tube type pressure gauges will generally be used. The material of the Bourdon-tube will be SS 316 minimum or better, depending on process requirements.

Pressure gauges shall have stainless steel housings with a blowout disc and zero adjustment. It must be possible to fill the gauge with glycerin.

The movement will be of corrosion and wear-resistant material, e.g. stainless steel/nylon-coated, independent of case.

Gauges for direct mounting will have a 1/2" NPT male bottom connection and a 4" (100 mm) dial.

Bourdon tube type pressure gages shall be used for ranges from 1Barg to 1000 Barg

Diaphragm type pressure gages shall be used for measuring ranges bellow 1 Barg.



Over range protection of pressure gauges shall be 1.3 of full scale.



For slurry, viscous, highly corrosive or fluids with suspended solids the pressure gages shall have diaphragm seal with 2" flange connection.

Pressure gauges will preferably be direct-mounted to the process. Receiver gauges may be local field-mounted or panel-mounted (local panel).

12.3 PRESSURE SWITCHES

Pressure switches will be of the Bourdon tube or pressure gauges with adjustable contacts (proximity type), diaphragm or bellows type with a 316 SS element as a minimum requirement. Switches will be adjustable over the full scale. Pressure switches for direct mounting will have a 1/2" NPT female connection. Diaphragm seals with capillary shall be provided where required. Whenever no suitable pressure switch can be found due to material or, over-range protection requirements etc., a 4 - 20 mA electronic transmitter will be used instead. Pressure switches for pneumatic signals will preferably have bellows measuring elements. Connections will be 1/4" NPT female. Pressure switches will have a minimum standard over-range protection of 130% of range and be capable of withstanding the full static design pressure of the system without loss of calibration. Switches will be snap acting hermetically sealed switches with contact rating in accordance with IEC 947-5-1 and relevant codes and standards. The switches type shall be SPDT type.

12.4 TRANSMITTERS

Transmitter measuring principles will be in accordance with the selected manufacturer's standards e.g. diffused silicon strain gauge, capacitance etc.

The transmitter will be of the "smart" (HART protocol) type with accuracy better than 0.2%.

The sensing element material will be AISI 316 minimum.

Electronic transmitters will be furnished with test terminals and by-pass diode to facilitate field-testing without disconnection or connection of a field mounted signal indicator (MV-Meter) either integral with or remote from the transmitter. Transmitters will be reverse polarity protected.

Electronic transmitters will have a provision for checking zero and span on the output terminals while the transmitter is in service.

The manufacturer of each type of transmitter shall supply suitable communicator.

12.5 DIAPHRAGM SEALS AND CAPILLARIES

For measurement of viscous fluids, fluids containing solids, highly corrosive fluids or where temperature changes may influence the fluid conditions the use of remote diaphragm seals and capillaries may be considered. Capillaries for remote seal applications will be kept as short as possible and will not exceed 6 m in length.

Seals and capillaries will be considered to be an integral part of the instrument.



13 TEMPERATURE INSTRUMENTS

13.1 THERMOWELLS

Standard length thermowells will be used. Thermowell will be solid machined and drilled from bar stock. They will be selected in accordance with the piping class.

Thermowells shall be flanged type, for connection size refer to Table #1.

13.2 THERMOCOUPLE ELEMENTS (T/C'S)

Thermocouples will be in accordance with IEC-60548; non-grounded hot junction type will be used for temperature measurement. RTD detectors will be used in preference to thermocouples for temperature ranges of -200 to 600°C . The following types of thermocouples may be used depending on the temperature range to be measured.

- Type K (chromel - alumel) -270 to 1372°C (Nickel-chrome/nickel-aluminum)
- Type R (platinum 13% rhodium-platinum) -50 to 1768°C
- Standard length thermocouples will be used. Thermocouple inserts will match the standard Thermowell diameter and length. Lagging extensions will be supplied as required. Connection heads to be metal type.
- Stainless steel sheathed mineral-insulated spring-loaded 2-wire type elements will be used. Special protection tube/sheathing and/or insulation will be used for temperatures above 800°C , saline environment and when hydrogen diffusion may be expected.
- For services where thermowells must be considered to be an obstacle in the process (clogging/turbulence), skin-type thermocouples may be considered. Skin-type thermocouples will be used to measure heater coil, reactor wall temperatures, as per process. Skin-type thermocouples will preferably be welded to the surface and as a minimum be spring-loaded or clamped. Open-air skin-thermocouple installations will be insulated. Skin-type thermocouples will not generally be used for shutdown purposes.

13.3 RESISTANCE-TYPE ELEMENTS (RTD'S)

Platinum-type resistance elements, with characteristics in accordance with IEC 751 (resistance 100 ohms at 0°C), will be used in preference to thermocouples for ranges between of -200 to 600°C

- Standard length elements will be used. RTD inserts will match the standard Thermowell diameter and length. Lagging extensions will be supplied as required. Connection heads to be metal type.
- Stainless steel sheathed mineral-insulated spring-loaded 3-wire type elements will be used.

13.4 THERMISTOR AND SEMICONDUCTOR SYSTEMS

These systems will not be used, except for motor windings when specified.

13.5 BIMETALLIC SYSTEMS

Dial thermometers for local use will be of the bimetallic type with adjustable gland and dial. Dial thermometers will fit the standard Thermowell diameter and lengths.



Document No. : 000-SPC-A4-IN-0009	Rev.: 01
Title: INSTRUMENTATION GENERAL SPECIFICATION	Page: 16

Thermometers will be heavy duty, industrial type. Nominal dial size will be 100 mm (4"). Case to be stainless steel with back shafts and zero adjustment. The movement will be of corrosion and wear-resistant material, e.g. stainless steel/nylon-coated, independent of the housing. Bimetallic-operated switches may only be used in non-critical services such as for tank heater. Bimetallic switches are not permitted for process alarm and shutdown functions.

13.6 TRANSMITTERS

- Head mounted mV/I (T/C) or ohm/I (RTD) converters will be used as much as possible. The required degree of accessibility will be strictly adhered to.
- In cases head mounting is not possible or when indicator is required, where, the converter will be installed locally, close to the measuring element or in the place where local reading is required.
- Cold junction compensation will be provided for mV/I (T/C) converters. Transmitters will be of the "smart" type with accuracy better than 0.2%. Electronic transmitters will be furnished with test terminals and by-pass diode to facilitate field-testing without disconnection or connection of a field mounted signal indicator (MV-Meter) either integral with or remote from the transmitter. Transmitters will be reverse polarity protected. Electronic transmitters will have a provision for checking zero and span on the output terminals while the transmitter is in service.

13.7 SPECIAL APPLICATIONS

Temperature-measurement on rotating equipment:

- A temperature rise in the bearings of rotating machinery, is an indication of approaching problems.
- In thrust bearing, a temperature rise indicates inadequate cooling of bearings or excessive wear.
- Sensors, extension wire, terminal heads, cables, boxes, etc., must be capable of withstanding considerable mechanical stress, weather exposure, fire-protection sprinklers, equipment washing etc.

13.8 REMARKS

Local temperature control (thermo-valve) is not recommended. Local recording will not be done.

Further detailed data and application for each type of instrument will be provided when specifying the temperature instruments.



14. CONTROL VALVES

14.1. GENERAL REQUIREMENT

Supplier quotation shall include a detailed specification sheet for each control valve, which shall provide all the details regarding type, construction materials, noise, etc... and any other valve accessories.

This specification is general. If exceptions, variation or additions are required in individual cases they will be shown on specification/data sheets for control valves.

Any proposed deviation from control valve specification /data sheets or this general specification, must be approved in writing by client / contractor.

14.2. CONTROL VALVES SELECTION

14.2.1. Required valves capacities

Required valve capacities shall be referred to in terms of CV coefficients and selected CV value.

14.2.2. Valve sizing

A calculation note / sheet for the sizing of each control valve shall be supplied.

Calculation of the control valves shall be based on ISA S 75.1 "Control valve sizing equations".

The control valve capacities in term if CV shown on the purchaser's data sheets has been arrived at using the formula given in the standard ISA-S-75.01, "Control Valve Sizing Equations". In case of Vendor sizing formula differs from this. Purchaser should be provided with the same.

In general, control valves shall be sized so that the valve opening is as following:

At maximum flow-about 90% open

At normal flow about 75% open

At minimum flow about 20% open

Rangeability of valves shall be 30:1 unless otherwise specified.

Butterfly valves shall be sized assuming a 60° opening at max. flow in general.

Non preferred valve body sizes are 1 ¼", 1 ¾", 2 ½", 3 ½", 4 ½", 5", 7" and 9".

Vendor shall furnish calculation sheets or computer print out for sizing.

14.2.3. By pass & Block Valve

Block & Bypass valves are mostly manifolded in piping system to allow manual manipulation of flow through systems when control valves are not in service. Bypass valves in sizes of 4 inches or less most be globe valves.

They should have a capacity at least equal to the calculated Cv of control valve.

Block and Bypass valves should be avoided in the following cases:

- On hydgen service
- Around 3-way valves
- Around self-acting steam pressure reducing valves
- Around control valves forming part of a protection system



14.2.4. Valve type

Globe body type control valves shall generally be chosen for standard use (due to bench test requirement).

Butterfly control valves shall be considered where:

- When available pressure drop is low
- For large line sizes
- Where allowed in piping specification

Shut off valves shall be generally selected as Ball type except for high temperature services.

Valves using special technology shall be submitted to the Client / Contractor for approval. (Clearly noted on P&ID)

For small size or special cases (low noise, etc...) other types shall also be considered

14.3. GENERAL VALVE CONSTRUCTION REQUIREMENTS

14.3.1. Flange Finish Facing

Minimum body and connection rating shall be 300 lbs Raised Face (RF). Flange facing shall be chosen in accordance with classes of the piping specification. Contact finish facing shall be as follows:

Spiral serrated finish (conventional symbols: RFD)

Roughness: Ra 6.3 mm to 12.5mm (250 min to 500 min AARH)

Smooth finish (conventional symbols: RFC)

Roughness: Ra 3.2 mm to 6.3mm (125 min to 250 min AARH)

For RTJ flanges, ring joints will be supplied by others

14.3.2. Accessories

Limit switches if any shall be proximity type with NAMUR standard.

All control valves shall be normally fitted with an electropneumatic positioners.

All accessories specified on data sheets shall be supplied, installed, connected and wired to the valve by the valve supplier.

All tubing shall be in 316 Stainless steel.

Compression fittings shall be in SS 316 Stainless steel double ferrule design.

Pneumatic connections shall be ¼" NPT female minimum, or bigger if stated by supplier for flow considerations.

Electrical connections shall be:

- M20 x 1.5 ISO for positioner
- M20 x 1.5 ISO solenoid valve

All positioners shall have pneumatic gauges, graduated in bar, two (2) in case of electropneumatic positioners, three (3) in case of pneumatic positioners if any. Dial size shall be as per Vendor standard.

Solenoid valves shall be provided where specified on data sheets and shall be NAMUR type.

Valve trim shall be stainless steel with Viton or similar resilient seat to provide tight shutoff.

Solenoid valves shall be normally energized. Coils shall be suitable for permanent energizing.

Low power coils shall be proposed (maximum acceptable is 10 W). Electrical power for solenoid valves coils will be 24 VDC.

Solenoid valves shall be suitable for instrument air Service.



Document No. : 000-SPC-A4-IN-0009	Rev.: 01
Title: INSTRUMENTATION GENERAL SPECIFICATION	Page: 19

When specified, solenoid valves shall be provided with manual reset facilities. The manual reset facilities shall prevent automatic reset but allow local manual reset of individual valves on restoration of electrical power (i.e. reset of electrical logic), and local shutdown.

15. PRESSURE RELIEF VALVES

Pressure relief valves shall be full-bore type.

Relief valves shall be designed in accordance to the requirements of API-RP-520.

Lifting lever shall be provided for steam and air services.

Conventional valves shall be used for constant back pressure applications while pressure balanced valves with stainless steel bellows shall be used for varying back pressure application where the back pressure exceeds 10% of the set pressure of the valve.

Connection of Pressure relief valves shall be flanged type while the connections of thermal relief valves shall be screwed type.

Steel bodies with stainless steel trim shall be used for all pressure relieving devices unless piping specification requires alloy construction.

Rupture Disc may be used in lieu of or in combination with safety and relief valves.

Combination of rupture disc and pressure safety valve shall be used for slurry or highly corrosive services.

Rupture discs shall be provided with bursting alarm device. Combination of rupture disc and relief valves shall include a pressure switch installed between disc and valve to alarm a leakage or burst.

16. ANALYZERS

Process analyzers requiring sampling will be supplied pre-assembled with their own sampling and conditioning systems in open ladder type racks. Analyzer racks will be installed in analyzer houses.

Where possible analyzers will be of the on-line type.

When necessary analyzers will be provided with a fast loop system

Sample purge gas and analyzer vent gas will be properly vented to a safe area.

When applicable analyzer transmitters shall be of the "smart" type with accuracy better than 0.2% and have a 4-20 mA output to DCS.

All materials used shall be suitable for the sample stream and the surrounding atmosphere; AISI 304 / 316 shall be selected as minimum.

Whenever practical sample shall be returned to the process. Other methods of disposal shall ensure safety and pollution restrictions.

Field mounted analyzers shall be used for simple analyzers such as Conductivity, PH, density, etc.

Analyzers shall be in general installed in analyzer house that shall be weather proof, with air conditioning.

Sample Pressure reducers, conditioners, fast loops, and calibration gas cylinders shall be installed outside analyzer house.



Further detailed data and application for each type of analyzer will be provided when specifying the analyzers.

INSTRUMENT ON VESSEL	VESSEL CONNECTION	FIRST BLOCK VALVE	INSTRUMENT CONNECTION
External level instrument	2" flanged	2" flanged	2" flanged
Internal displacer level	4" flanged	-	-
External ball float level switch	4" flanged	-	4" flanged
Internal ball float level switch	4" flanged	-	4" flanged
Level guage on vessel	1" flanged	1" flanged	1" flanged
Level guage on standpipe	1" flanged	1" flanged	1" flanged
Magnetic level instrument	1" flanged	1" flanged	1" flanged
Dp cell on vessel (without diaphragm)	1" flanged	1" flanged	1/2" NPT
Dp cell on vessel (with diaphragm)	3" flanged	3" flanged	3" diaph.seal
Dp cell on standpipe(without diaphragm)	1" flanged	1" flanged	1/2" NPT
Dp cell on standpipe (with diaphragm)	3" flanged	3" flanged	3" diaph.seal
Dip tube level instrument	4" flanged	1" flanged	1/2" NPT
Pressure guage&transmitter(general case)	1" flanged	1" flanged	1/2" NPT
Pressure transmitter with diaphragm	2" flanged	2" flanged	2" flanged
Pressure gauge with diaphragm	2" flanged	2" flanged	2" flanged
Thermowell (general case)	1 1/2" flanged	-	-
D/P pressure transmitter /gauge(vessel)	1" flanged	1" flanged	1/2" NPT
Radar type level instrument	3" flanged	-	-

Table #1

PIPING	PIPE CONNECTION	FIRST BLOCK PIPE	INSTRUMENT CONNECTION
Orifice (Dp) flow-meter	1/2"	1/2"	1/2" NPT
Pitot tube	Acc.mfr.std	Acc.mfr.std	1/2" NPT
Pressure transmitter	1/2 "	1/2"	1/2" NPT
Pressure gauge	1/2 "	1/2"	1/2" NPT
Pressure transmitter with diaphragm	2" flanged	2" flanged	2" flanged
Pressure guage with diaphragm	2" flanged	2" flanged	2" flanged
Thermowell (flanged connection)	1 1/2" flanged	-	TE : 1/2" NPT
Thermowell (Threaded connection)	1 " NPT	-	
Analyzer connection	1" flanged	Special valve	Acc.mfr.std
D/P pressure transmitter/guage	1/2"	1/2"	1/2"

Table #2

شماره صفحه
269 از 270

پیوست‌های موافقت‌نامه مناقصه دو مرحله‌ای
خرید 108 عدد ولوهای ON/OFF برای فاز گازی واحد پلی‌اتیلن / پلی‌پروپیلن



پیوست شماره 8: نمونه فرم صورتحساب فروش کالا و خدمات

صورت حساب فروش کالا و خدمات

شماره سریال:

تاریخ:

مشخصات فروشنده

نام شخص حقیقی/حقوقی:	شماره اقتصادی:	شماره ثبت/شماره ملی:
نشانی: استان:	شهرستان:	کدپستی:
نشانی:	شماره تلفن/نمابر:	شهر:

مشخصات خریدار

نام شخص حقیقی/حقوقی:	شماره اقتصادی:	شماره ثبت/شماره ملی:
نشانی: استان:	شهرستان:	کدپستی:
نشانی:	شماره تلفن/نمابر:	شهر: تهران

مشخصات کالا یا خدمات مورد معامله

ردیف	شرح کالا یا خدمات	تعداد	مبلغ واحد (ریال)	مبلغ کل (ریال)	مبلغ تخفیف	مبلغ کل پس از تخفیف (ریال)	جمع مالیات و عوارض (ریال)	جمع مبلغ کل بعلاوه جمع مالیات و عوارض (ریال)
1								
2								
3								
4								
5								
6								
7								
جمع کل								

شرایط و نحوه فروش نقدی غیر نقدی

توضیحات:

مهر و امضاء خریدار

مهر و امضاء فروشنده