

PROJECT: PP-PE PILOT PLANT

client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: Data Sheet for Alkyl Metering Pump (P-121)

DATA SHEET FOR ALKYL METERING PUMP (P-121)

Document No.: 100-DAS-A4-RE-0013

Rev.: 0

Owner Job No.:

Type: DAS

Page : A

PROJECT: PP-PE PILOT PLANT

client:

Title: Data Sheet for Alkyl Metering Pump (P-121)




REV. PAGE	0	1	2	3	4	5	REV. PAGE	0	1	2	3	4	5	REV. PAGE	0	1	2	3	4	5
A	X																			
B	X																			
1	X																			
2	X																			
3	X																			

5					
4					
3					
2					
1					
0	1/1/2022	K.A	M.N	AA.SH	IFA
Rev	Date	Prepared By	Checked BY	Approved by	Status

Document Revision

	Document No.: 100-DAS-A4-RE-0013	Rev.: 0
	Owner Job No.:	Type: DAS
		Page : B

PROJECT: PP-PE PILOT PLANT	client: _____
Title: Data Sheet for Alkyl Metering Pump(P-121)	 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی

1	APPLICABLE TO: <input checked="" type="radio"/> PROPOSAL <input type="radio"/> PURCHASE <input type="radio"/> AS BUILT
2	FOR _____ NPC R&T _____ UNIT _____ 100
3	SITE _____ NPC R&T CENTRE-ARAK-IRAN _____ NO. OF PUMPS REQUIRED _____ 1 (one)
4	SERVICE _____ ALKYL METERING PUMP(Note 9) _____ MODEL _____ SIZE AND TYPE _____ DIAPHRAGM PUMP
5	MANUFACTURER _____ SERIAL NO. _____

6 NOTE: INDICATES INFORMATION TO BE COMPLETED BY PURCHASER BY MANUFACTURER

7	GENERAL	
8	NO. MOTOR DRIVEN _____ 1 _____ OTHER DRIVER TYPE _____	
9	PUMP ITEM NO'S _____ P-121 _____ PUMP ITEM NO'S _____	
10	MOTOR ITEM NO'S _____ PM-121 _____ DRIVER ITEM NO'S _____ GEAR ITEM NO'S _____	
11	MOTOR PROVIDED BY _____ PUMP VENDOR _____ DRIVER PROVIDED BY _____ GEAR PROVIDED BY _____	
12	MOTOR MOUNTED BY _____ PUMP VENDOR _____ DRIVER MOUNTED BY _____ GEAR MOUNTED BY _____	
13	MOTOR DATA SHEET NO. _____ DRIVER DATA SHEET NO. _____ GEAR DATA SHEET NO. _____	

14	● OPERATING CONDITIONS (Note 1)	● LIQUID
15	● CAPACITY @ PT (l/h): NORMAL _____ 5 _____ MINIMUM _____ 0.5 _____ RATED _____ 7	● TYPE OR NAME OF LIQUID _____ Al-Alkyl+N-Hexane (Note 3)
16	● DISCHARGE PRESSURE (BARA): MAXIMUM _____ MINIMUM _____ NORMAL _____ 56	● PUMPING TEMPERATURE (°C): ● NORMAL _____ 30 _____ MAX _____ MIN _____
17	● SUCTION PRESSURE (BARA): MAXIMUM _____ 1.4 _____ MINIMUM _____ NORMAL _____ 1.1	● SPECIFIC GRAVITY _____ 0.65 _____ MAXIMUM _____ MINIMUM _____
18	● DIFFERENTIAL PRESSURE (BAR): MAXIMUM _____ MINIMUM _____ NORMAL _____ 54.9	● SPECIFIC HEAT _____ ~2.2 _____ Cp (KJ/Kg°C)
19	● NPSH AVAILABLE (m) _____ 3 _____	● VISCOSITY (Cp) _____ 0.29 _____ MAXIMUM _____
20	WITHOUT ACCELERATION HEAD _____ ACTUAL _____	● VAPOR PRESSURE _____ 0.25 _____ (bara) @ _____ 30 _____ (°C)
21	● TURNDOWN RATIO _____ Vendor to Specify _____	● CORROSIVE/EROSIVE AGENTS _____ ALUMINUM ALKYLE (TEAL)
22	<input type="checkbox"/> PERFORMANCE	<input type="checkbox"/> CHLORIDE CONCENTRATION (PPM) _____
23	● NUMBER OF FEEDS _____ 1 _____ RATED CAPACITY (m ³ /h) _____ 0.007	<input type="checkbox"/> H ₂ S CONCENTRATION (PPM) _____
24	● NPSH REQUIRED (m) _____ Flooded	LIQUID <input checked="" type="radio"/> TOXIC <input checked="" type="radio"/> FLAMMABLE <input type="radio"/> OTHER
25	● KW RATED _____ VTA _____ AT RELIEF SETTING _____	● SITE AND UTILITY DATA (Note 11)
26	● PLUNGER SPEED (STROKES/MIN) _____ VTA _____ DESIGN MAX _____	LOCATION <input checked="" type="radio"/> INDOOR <input type="radio"/> OUTDOOR
27	● DIAMETER (mm) _____ VTA _____ LENGTH OF STROKE (mm) _____	<input type="radio"/> HEATED <input checked="" type="radio"/> UNHEATED <input type="radio"/> UNDER ROOF
28	PUMP HEAD: _____ VTA _____	● ELECTRICAL AREA CLASS _____ ExdIIBT4 _____ GROUP _____ DIV 2
29	<input type="checkbox"/> HYDRO TEST PRESSURE (BARG) _____ VTA _____	● WINTERIZATION REQ'D <input type="checkbox"/> TROPICALIZATION REQ'D
30	<input type="checkbox"/> MAX DISCH PRESS. W/ JOB DRIVER (BARG) _____	SITE DATA (Note 4)
31	<input type="checkbox"/> MAX KW BASIS GEAR STRENGTH _____	● RANGE OF AMBIENT TEMPS: MIN/MAX _____ -28 / 44 _____ °C
32	CONSTRUCTION	UNUSUAL CONDITIONS
33	CONNECTIONS	● DUST <input checked="" type="radio"/> FUMES <input type="radio"/> SALT ATMOSPHERE
34	SIZE	● OTHER _____ Corrosive
35	ANSI RATING	● UTILITY CONDITIONS
36	FACING	ELECTRICITY DRIVERS HEATING CONTROL SHUTDOWN
37	POSITION	VOLTAGE _____ 400 _____ 230 _____
38	SUCTION	HERTZ _____ 50 _____ 50 _____
39	DISCHARGE	PHASE _____ 3 _____ 1 _____
40	FLUSH	COOLING WATER INLET RETURN DESIGN MAX Δ
41	LIQUID END	TEMP (°C) _____ MAX _____
42	● JACKET REQ'D	PRESS. (BAR) _____
43	<input checked="" type="radio"/> DIAPHRAGM <input type="radio"/> PLUNGER	SOURCE _____
44	<input type="checkbox"/> DIAPHRAGM DIA (mm) _____ NO REQ.	INSTRUMENT AIR _____ NOR _____ MAX _____ MIN
45	<input type="checkbox"/> VALVES/FEED	PRESSURE (BARG) _____
46	SUCTION	APPLICABLE SPECIFICATIONS:
47	DISCHARGE	● API 675 POSITIVE DISPLACEMENT PUMPS - CONTROLLED VOLUME
48	TYPE	<input type="radio"/> GOVERNING SPECIFICATION (IF DIFFERENT)
49	NUMBER	

50	REMARKS
51	
52	
53	
54	

	Document No.: 100-DAS-A4-RE-0013	Rev.: 0
	Owner Job No.:	Type: DAS
		Page : 1 of 3

PROJECT: PP-PE PILOT PLANT

client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: Data sheet for Alkyl Metering Pump(P-121)

1	MATERIAL *		CONTROLS		
2	LIQUID END	AISI 316L	TYPE: <input type="radio"/> MANUAL <input checked="" type="radio"/> REMOTE <input type="radio"/> PNEUMATIC (Note 5) <input checked="" type="radio"/> AUTOMATIC <input type="radio"/> LOCAL <input type="radio"/> ELECTRONIC (Note 5)		
3	CONTOUR PLATE	AISI 316L	SIGNAL:		
4	HYDRAULIC DIAPHRAGM	PTFE	STROKE CONTROL:		
5	PROCESS DIAPHRAGM	PTFE	PNEUMATIC (PSIG): MINIMUM 3 MAXIMUM 15		
6	PLUNGER	X 40 Cr Mo V 5 11 Ku	ELECTRONIC(mA): MINIMUM 4 MAXIMUM 20		
7	LANTERN RING		OTHER PURCHASE REQUIREMENTS		
8	PACKING GLAND		NAMEPLATE UNITS <input type="radio"/> CUSTOMARY <input checked="" type="radio"/> SI		
9	PACKING		<input type="radio"/> VENDOR FURNISHED PROCESS PIPING		
10	VALVE	AISI 316L	<input checked="" type="radio"/> VENDOR REVIEW PIPING DRAWINGS		
11	VALVE SEAT	AISI 316L	<input checked="" type="radio"/> VENDOR FURNISHED PULSATION SUPPRESSION DEVICES (Note 10)		
12	VALVE GUIDE	AISI 316L	<input checked="" type="radio"/> VENDOR FURNISHED RELIEF VALVE		
13	VALVE BODY	AISI 316L	<input checked="" type="radio"/> INTERNAL <input checked="" type="radio"/> EXTERNAL		
14	VALVE GASKET	VITON	<input checked="" type="checkbox"/> RELIEF VALVE SETTING (BARG) (Note 6)		
15	FRAME	VTA	<input checked="" type="radio"/> VENDOR FURNISHED BACK-PRESSURE VALVE (IF REQUIRED)		
16	SPECIAL MATERIAL TESTS (2.13.1.3)		<input type="radio"/> DOUBLE CHECK VALVES REQUIRED		
17			<input type="radio"/> OIL-FILLED PRESSURE GAUGES REQUIRED		
18	<input type="radio"/> LOW AMBIENT TEMPERATURE MATERIALS TESTS (2.13.5)		<input type="radio"/> VENDOR FURNISHED CONTROL PANEL		
19	*All the process side materials shall be S.S.316			<input type="radio"/> BASEPLATE PREPARED FOR EPOXY GROUT	
20	QA INSPECTION AND TEST			<input checked="" type="radio"/> PROVIDE TECHNICAL DATA MANUAL	
21	<input checked="" type="radio"/> COMPLIANCE WITH INSPECTORS CHECK LIST			<input type="radio"/>	
22	<input checked="" type="radio"/> CERTIFICATION OF MATERIALS			<input type="radio"/>	
23	<input checked="" type="radio"/> FINAL ASSEMBLY CLEARANCES			<input type="radio"/>	
24	<input checked="" type="radio"/> SURFACE AND SUBSURFACE EXAMINATIONS			<input type="radio"/>	
25	<input checked="" type="radio"/> RADIOGRAPHY			<input type="radio"/>	
26	<input checked="" type="radio"/> ULTRASONIC			<input type="radio"/>	
27	<input checked="" type="radio"/> MAGNETIC PARTICLE			<input type="radio"/>	
28	<input checked="" type="radio"/> LIQUID PENETRANT			<input type="radio"/>	
29	<input checked="" type="radio"/> CLEANLINESS PRIOR TO FINAL ASSEMBLY			<input type="radio"/>	
30	<input type="radio"/> HARDNESS OF PARTS, WELDS & HEAT AFFECTED ZONES			<input type="radio"/>	
31	<input type="radio"/> FURNISH PROCEDURES FOR OPTIONAL TESTS			<input type="radio"/>	
32	TESTS	REQ'D	WIT	OBS	
33	HYDROSTATIC	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	
34	STEADY STATE ACCURACY	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	
35	REPEATABILITY	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	
36	LINEARITY	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	
37	PERFORMANCE / MECHANICAL RUN	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	
38		<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
39	LUBRICATION FLUID			PREPARATION FOR SHIPMENT	
40	<input checked="" type="checkbox"/> CRANKCASE	VTA	<input type="checkbox"/> INTERMEDIATE	<input checked="" type="radio"/> DOMESTIC <input checked="" type="radio"/> EXPORT <input checked="" type="radio"/> EXPORT BOXING	
41	<input checked="" type="checkbox"/> HYDRAULIC FLUID	VTA		<input checked="" type="radio"/> OUTDOOR STORAGE MORE THAN 12 MONTHS	
42	ACCESSORIES			WEIGHTS (KG)	
43	<input type="checkbox"/> SPEED REDUCER MANUFACTURER			<input type="checkbox"/> PUMP <input type="checkbox"/> BASE <input type="checkbox"/> GEAR <input type="checkbox"/> DRI	
44	<input checked="" type="radio"/> INTEGRAL <input type="radio"/> SEPARATE			DRIVERS	
45	MODEL	WORM GEAR		<input checked="" type="radio"/> MOTOR: ELECTRIC MOTOR (Note 8)	
46	RATIO	10:1		<input checked="" type="checkbox"/> MANUFACTURER VTA	
47	<input type="checkbox"/> BASEPLATE UNDER			<input checked="" type="checkbox"/> TYPE ASYNCHRONOUS	
48	<input type="checkbox"/> COUPLING MANUFACTURER			<input type="checkbox"/> FRAME NO.	
49	<input type="checkbox"/> TYPE Flexible			<input checked="" type="radio"/> CONSTANT SPEED	
50	REMARKS			<input type="checkbox"/> VARIABLE SPEED	

Document No.: 100-DAS-A4-RE-0013

Rev.: 0

Owner Job No.:

Type: DAS

PROJECT: PP-PE PILOT PLANT

client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: Data Sheet for Alkyl Metering Pump (P-121)

NOTES:

- Note 1 : Design temperature : 100 °C , Design Pressure : 100 barg.
- Note 2 : Pump shall have a double membrane system and a membrane rupture indicator.
- Note 3 : 100 gr/lit Alkyl concentration in hexane.
- Note 4 : See "Engineering Specification for Site Conditions", Doc. No. 900-SPC-A4-PEM-0001.
- Note 5 : With "I" to "P" Converter.
- Note 6 : Setting Pressure of internal oil relieving valve : 70 barg and for external 65barg.
- Note 7 : Pressure at suction vessel : 1.1 bara.
- Note 8 : ALL ELECTRICAL MOTORS SHALL BE IN ACCORDANCE WITH "TECHNICAL SPECIFICATION FOR LV MOTOR
" DOC.No.900-SPC-A4-EE-0005. MOTOR ENCLOSURES SHALL BE OF TOTALLY ENCLOSED FAN-COOLED (TEFC).
- Note 9 : Continuous operation.
- Note 10 : pump shall be equipped with pulsation damper provided by vendor. (V-124)
- Note11: REFERE TO "UTILITY CONDITION" DOC.No.: 900-SPC-A4-PR-0006.

Document No.: 100-DAS-A4-RE-0013

Rev.: 0

Owner Job No.:

Type: DAS

Page : 3 of 3

PROJECT: PP-PE PILOT PLANT

client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: Data Sheet for Donor Metering Pump (P-131)

DATA SHEET FOR DONOR METERING PUMP (P-131)

Document No.: 100-DAS-A4-RE-0015

Rev.: 0

Owner Job No.:

Type: DAS

Page : A

PROJECT: PP-PE PILOT PLANT

Client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

**TITLE: Data Sheet for Donor Metering Pump
(P-131)**

REV. PAGE	0	1	2	3	4	5	REV. PAGE	0	1	2	3	4	5	REV. PAGE	0	1	2	3	4	5
	A	X																		
B	X																			
1	X																			
2	X																			
3	X																			

5					
4					
3					
2					
1					
0	1/1/2022	K.A	M.N	AA.SH	IFA
Rev.	Date	Prepared By	Checked By	Approved By	Status

Document Revision

	Document No.: 100-DAS-A4-RE-0015	Rev.: 0
	Owner Job No.:	Type: DAS
		Page B

PROJECT: PP-PE PILOT PLANT

client:



TITLE: Data Sheet for Donor Metering Pump(P-131)

1 APPLICABLE TO: PROPOSAL PURCHASE AS BUILT

2 FOR NPC R&T UNIT 100

3 SITE NPC R&T CENTRE-ARAK-IRAN NO. OF PUMPS REQUIRED 1 (one)

4 SERVICE DONOR METERING PUMP MODEL _____ SIZE AND TYPE DIAPHRAGM PUMP

5 MANUFACTURER _____ SERIAL NO. _____

6 NOTE: INDICATES INFORMATION TO BE COMPLETED BY PURCHASER BY MANUFACTURER

7 **GENERAL**

8 NO. MOTOR DRIVEN 1 OTHER DRIVER TYPE _____

9 PUMP ITEM NO'S P-131 PUMP ITEM NO'S _____

10 MOTOR ITEM NO'S PM-131 DRIVER ITEM NO'S _____ GEAR ITEM NO'S _____

11 MOTOR PROVIDED BY PUMP VENDOR DRIVER PROVIDED BY _____ GEAR PROVIDED BY _____

12 MOTOR MOUNTED BY PUMP VENDOR DRIVER MOUNTED BY _____ GEAR MOUNTED BY _____

13 MOTOR DATA SHEET NO. _____ DRIVER DATA SHEET NO. _____ GEAR DATA SHEET NO. _____

14 **● OPERATING CONDITIONS (Note 1)**

15 ● CAPACITY @ PT (l/h):

16 NORMAL 5 MINIMUM 0.5 RATED 7

17 ● DISCHARGE PRESSURE (BARA):

18 MAXIMUM _____ MINIMUM _____ NORMAL 56

19 ● SUCTION PRESSURE (BARA):

20 MAXIMUM 4.5 MINIMUM _____ NORMAL 1.2

21 ● DIFFERENTIAL PRESSURE (BAR):

22 MAXIMUM _____ MINIMUM _____ NORMAL 54.8

23 ● NPSH AVAILABLE (m) 3

24 WITHOUT ACCELERATION HEAD _____ ACTUAL _____

25 ● TURNDOWN RATIO Vendor to Specify

26 **PERFORMANCE**

27 ■ NUMBER OF FEEDS 1 RATED CAPACITY (m³/h) 0.007

28 ■ NPSH REQUIRED (m) Flooded

29 ■ KW RATED VTA AT RELIEF SETTING _____

30 ■ PLUNGER SPEED (STROKES/MIN) VTA DESIGN MAX _____

31 ■ DIAMETER (mm) VTA LENGTH OF STROKE (mm) _____

32 PUMP HEAD: VTA

33 MAXIMUM PRESSURE (BARG) VTA

34 HYDRO TEST PRESSURE (BARG) _____

35 MAX DISCH PRESS. W/ JOB DRIVER (BARG) _____

36 MAX KW BASIS GEAR STRENGTH _____

37 **CONSTRUCTION**

CONNECTIONS	SIZE	ANSI RATING	FACING	POSITION
SUCTION	<u>1/2"</u>	<u>600#</u>	<u>RF</u>	
DISCHARGE	<u>1/2"</u>	<u>600#</u>	<u>RF</u>	
FLUSH				

38 LIQUID END JACKET REQ'D

39 TYPE (Note 2) DIAPHRAGM PLUNGER

40 DIAPHRAGM DIA (mm) _____ NO REQ. _____

41 VALVES/FEED SUCTION _____ DISCHARGE _____

42 TYPE _____

43 NUMBER _____

44 REMARKS

45 REMARKS

46 REMARKS

47 REMARKS

48 REMARKS

49 REMARKS

50 REMARKS

51 REMARKS

● **LIQUID**

● TYPE OR NAME OF LIQUID Donor+N-Hexane (Note 3)

● PUMPING TEMPERATURE (°C):

● NORMAL 30 MAX _____ MIN _____

● SPECIFIC GRAVITY 0.650 MAXIMUM _____ MINIMUM _____

● SPECIFIC HEAT - 2.2 Cp (KJ/Kg°C)

● VISCOSITY (Cp) 0.29 MAXIMUM _____

● VAPOR PRESSURE 0.25 (bara) @ 30 (°C)

CORROSIVE/EROSIVE AGENTS _____

CHLORIDE CONCENTRATION (PPM) _____

H₂S CONCENTRATION (PPM) _____

LIQUID TOXIC FLAMMABLE OTHER

● **SITE AND UTILITY DATA (NOTE 11)**

LOCATION INDOOR OUTDOOR

HEATED UNHEATED UNDER ROOF

● ELECTRICAL AREA CLASS ExdIIBT4 GROUP _____ DIV _____

● WINTERIZATION REQ'D TROPICALIZATION REQ'D _____

SITE DATA (Note 4)

● RANGE OF AMBIENT TEMPS: MIN/MAX -28 / 44 °C

UNUSUAL CONDITIONS

● DUST FUMES SALT ATMOSPHERE

● OTHER Corrosive

● UTILITY CONDITIONS

ELECTRICITY	DRIVERS	HEATING	CONTROL	SHUTDOWN
VOLTAGE	<u>400</u>		<u>230</u>	
HERTZ	<u>50</u>		<u>50</u>	
PHASE	<u>3</u>		<u>1</u>	

COOLING WATER INLET _____ RETURN _____ DESIGN _____ MAX Δ _____

TEMP (°C) _____

PRESS. (BAR) _____

SOURCE _____

INSTRUMENT AIR _____ NOR _____ MAX _____ MIN _____

PRESSURE (BARG) _____

APPLICABLE SPECIFICATIONS:

● API 675 POSITIVE DISPLACEMENT PUMPS - CONTROLLED VOLUME

GOVERNING SPECIFICATION (IF DIFFERENT)

Document No.: 100-DAS-A4-RE-0015

Rev.: 0

Owner Job No.:

Type: DAS

Page: 1 of 3

PROJECT: PP-PE PILOT PLANT

client:



TITLE: Data sheet for Donor Metering Pump (P-131)

1	MATERIAL *		
2	LIQUID END	AISI 316L	
3	CONTOUR PLATE	AISI 316L	
4	HYDRAULIC DIAPHRAGM	PTFE	
5	PROCESS DIAPHRAGM	PTFE	
6	PLUNGER	X 40 Cr Mo V 5 11 Ku	
7	LANTERN RING		
8	PACKING GLAND		
9	PACKING		
10	VALVE	AISI 316L	
11	VALVE SEAT	AISI 316L	
12	VALVE GUIDE	AISI 316L	
13	VALVE BODY	AISI 316L	
14	VALVE GASKET	VITON	
15	FRAME	VTA	
16	SPECIAL MATERIAL TESTS (2.13.1.3)		
17			
18	<input type="checkbox"/> LOW AMBIENT TEMPERATURE MATERIALS TESTS (2.13.5)		
19	*All the process side materials shall be S.S.316		
20	QA INSPECTION AND TEST		
21	<input checked="" type="checkbox"/> COMPLIANCE WITH INSPECTORS CHECK LIST		
22	<input checked="" type="checkbox"/> CERTIFICATION OF MATERIALS		
23	<input checked="" type="checkbox"/> FINAL ASSEMBLY CLEARANCES		
24	<input checked="" type="checkbox"/> SURFACE AND SUBSURFACE EXAMINATIONS		
25	<input checked="" type="checkbox"/> RADIOGRAPHY		
26	<input checked="" type="checkbox"/> ULTRASONIC		
27	<input checked="" type="checkbox"/> MAGNETIC PARTICLE		
28	<input checked="" type="checkbox"/> LIQUID PENETRANT		
29	<input checked="" type="checkbox"/> CLEANLINESS PRIOR TO FINAL ASSEMBLY		
30	<input type="checkbox"/> HARDNESS OF PARTS, WELDS & HEAT AFFECTED ZONES		
31	<input type="checkbox"/> FURNISH PROCEDURES FOR OPTIONAL TESTS		
32	TESTS	REQ'D	WIT
33	HYDROSTATIC	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
34	STEADY STATE ACCURACY	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
35	REPEATABILITY	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
36	LINEARITY	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
37	PERFORMANCE / MECHANICAL RUN	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
38		<input type="checkbox"/>	<input type="checkbox"/>
39	LUBRICATION FLUID		
40	<input checked="" type="checkbox"/> CRANKCASE	VTA	<input type="checkbox"/> INTERMEDIATE
41	<input checked="" type="checkbox"/> HYDRAULIC FLUID	VTA	
42	ACCESSORIES		
43	<input type="checkbox"/> SPEED REDUCER MANUFACTURER		
44	<input checked="" type="checkbox"/> INTEGRAL	<input type="checkbox"/> SEPARATE	
45	MODEL	WORM GEAR	
46	RATIO	10:1	
47	<input type="checkbox"/> BASEPLATE UNDER		
48	<input type="checkbox"/> COUPLING MANUFACTURER		
49	TYPE	Flexible	

CONTROLS		
TYPE:	SIGNAL:	
<input type="checkbox"/> MANUAL	<input checked="" type="checkbox"/> REMOTE	<input type="checkbox"/> PNEUMATIC (Note 5)
<input checked="" type="checkbox"/> AUTOMATIC	<input type="checkbox"/> LOCAL	<input type="checkbox"/> ELECTRONIC (Note 5)
STROKE CONTROL:		
PNEUMATIC (PSIG):	MINIMUM 3	MAXIMUM 15
ELECTRONIC(mA):	MINIMUM 4	MAXIMUM 20
OTHER PURCHASE REQUIREMENTS		
NAMEPLATE UNITS	<input type="checkbox"/> CUSTOMARY	<input checked="" type="checkbox"/> SI
<input type="checkbox"/> VENDOR FURNISHED PROCESS PIPING		
<input checked="" type="checkbox"/> VENDOR REVIEW PIPING DRAWINGS		
<input checked="" type="checkbox"/> VENDOR FURNISHED PULSATION SUPPRESSION DEVICES	(Tag No. V-133)	
<input checked="" type="checkbox"/> VENDOR FURNISHED RELIEF VALVE		
<input checked="" type="checkbox"/> INTERNAL	<input checked="" type="checkbox"/> EXTERNAL	
<input checked="" type="checkbox"/> RELIEF VALVE SETTING (BARG)	(Note 6)	
<input checked="" type="checkbox"/> VENDOR FURNISHED BACK-PRESSURE VALVE	(IF REQUIRED)	
<input checked="" type="checkbox"/> DOUBLE CHECK VALVES REQUIRED		
<input checked="" type="checkbox"/> OIL-FILLED PRESSURE GAUGES REQUIRED		
<input type="checkbox"/> VENDOR FURNISHED CONTROL PANEL		
<input type="checkbox"/> BASEPLATE PREPARED FOR EPOXY GROUT		
<input checked="" type="checkbox"/> PROVIDE TECHNICAL DATA MANUAL		
<input type="checkbox"/>		
<input type="checkbox"/>		
PREPARATION FOR SHIPMENT		
<input checked="" type="checkbox"/> DOMESTIC	<input checked="" type="checkbox"/> EXPORT	<input checked="" type="checkbox"/> EXPORT BOXING
<input checked="" type="checkbox"/> OUTDOOR STORAGE MORE THAN 12 MONTHS		
WEIGHTS (KG)		
<input type="checkbox"/> PUMP	<input type="checkbox"/> BASE	<input type="checkbox"/> DRIVER
DRIVERS		
<input checked="" type="checkbox"/> MOTOR:	ELECTRIC MOTOR (Note 8)	
<input checked="" type="checkbox"/> MANUFACTURER	VTA	
<input checked="" type="checkbox"/> TYPE	ASYNCHRONOUS	
<input type="checkbox"/> FRAME NO.		
<input checked="" type="checkbox"/> CONSTANT SPEED		
<input type="checkbox"/> VARIABLE SPEED		
<input checked="" type="checkbox"/> KW	VTA	RPM
<input checked="" type="checkbox"/> VOLTS	400	PHASE 3
<input checked="" type="checkbox"/> HERTZ	50	SERVICE FACTOR
<input checked="" type="checkbox"/> ENCLOSURE	IP55, EExd IIB T4	
<input type="checkbox"/> OTHER (SEE SEPARATE DATA SHEETS)		
<input type="checkbox"/> GAS DRIVEN		
<input type="checkbox"/> STEAM TURBINE		
<input type="checkbox"/> OTHER		

REMARKS

Document No.:100-DAS-A4-RE-0015

Rev.: 0

Owner Job No.:

Type: DAS

Page : 2 of 3

PROJECT: PP-PE PILOT PLANT

client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: Data Sheet for Donor Metering Pump (P-131)

NOTES:

Note 1 : Design temperature : 100 °C , Design Pressure : 100 barg.

Note 2: Pump shall have a double membrane system and a membrane rupture indicator.

Note 3: 20 gr/lit Donor concentration in hexane.

Note 4: See "Engineering Specification for Site Conditions", Doc. No. 900-SPC-A4-PEM-0001.

Note 5: With "I" to "P" Converter.

Note 6: Setting Pressure of internal oil relieving valve : 70 barg and for external 65barg.

Note 7 : Pressure at suction vessel : 1.2 bara.

Note 8 : ALL ELECTRICAL MOTORS SHALL BE IN ACCORDANCE WITH "TECHNICAL SPECIFICATION FOR LV MOTOR
" DOC.No.900-SPC-A4-EE-0005. MOTOR ENCLOSURES SHALL BE OF TOTALLY ENCLOSED FAN-COOLED (TEFC).

Note 9 : Continuous operation.

Note 10 : Type of protection shall be Aexd.

Note 11: REFERE TO "UTILITY CONDITION" DOC.No.: 900-SPC-A4-PR-0006.

Document No.: 100-DAS-A4-RE-0015

Rev.: 0

Owner Job No.:

Type: DAS

Page : 3 of 3

PROJECT: PP-PE PILOT PLANT

client:



TITLE: Data Sheet for Atmer Metering Pump (P-141)

DATA SHEET FOR ATMER METERING PUMP (P-141)

Document No.: 100-DAS-A4-RE-0017

Rev.: 0

Owner Job No.:

Type: DAS

Page : A

PROJECT: PP-PE PILOT PLANT

CLIENT:

TITLE: Data Sheet for Atmer Metering Pump (P-141)



REV. PAGE						REV. PAGE						REV. PAGE							
	0	1	2	3	4		5	0	1	2	3		4	5	0	1	2	3	4
A	X																		
B	X																		
1	X																		
2	X																		
3	X																		
5																			
4																			
3																			
2																			
1																			
0		1/1/2022				K.A			M.N				AA.SH					IFA	
Rev.		Date				Prepared By			Checked By				Approved By					Status	

Document Revision

	Document No.: 100-DAS-A4-RE-0017	Rev.: 0
	Owner Job No.:	Type: DAS
		Page B

PROJECT: PP-PE PILOT PLANT

Client:



TITLE: Data Sheet for Atmer Metering Pump (P-141)

1 APPLICABLE TO: PROPOSAL PURCHASE AS BUILT

2 FOR NPC R&T UNIT 100

3 SITE NPC R&T CENTRE-ARAK-IRAN NO. OF PUMPS REQUIRED 1 (one)

4 SERVICE ATMER METERING PUMP MODEL _____ SIZE AND TYPE DIAPHRAGM PUMP

5 MANUFACTURER _____ SERIAL NO. _____

6 NOTE: INDICATES INFORMATION TO BE COMPLETED BY PURCHASER BY MANUFACTURER

7 **GENERAL**

8 NO. MOTOR DRIVEN 1 OTHER DRIVER TYPE _____

9 PUMP ITEM NO'S P-141 PUMP ITEM NO'S _____

10 MOTOR ITEM NO'S PM-141 DRIVER ITEM NO'S _____ GEAR ITEM NO'S _____

11 MOTOR PROVIDED BY PUMP VENDOR DRIVER PROVIDED BY _____ GEAR PROVIDED BY _____

12 MOTOR MOUNTED BY PUMP VENDOR DRIVER MOUNTED BY _____ GEAR MOUNTED BY _____

13 MOTOR DATA SHEET NO. _____ DRIVER DATA SHEET NO. _____ GEAR DATA SHEET NO. _____

14 **OPERATING CONDITIONS (Note 1) LIQUID**

15 CAPACITY @ PT (l/h):
 16 NORMAL 5 MINIMUM 0.5 RATED 7
 DISCHARGE PRESSURE (BARA):
 17 MAXIMUM _____ MINIMUM _____ NORMAL 56
 SUCTION PRESSURE (BARA):
 18 MAXIMUM 4.5 MINIMUM _____ NORMAL 1.2
 DIFFERENTIAL PRESSURE (BAR):
 19 MAXIMUM _____ MINIMUM _____ NORMAL 54.8
 NPSH AVAILABLE (m) 3
 20 WITHOUT ACCELERATION HEAD _____ ACTUAL _____
 TURNDOWN RATIO Vendor to Specify

21 TYPE OR NAME OF LIQUID Atmer+N-Hexane (Note 3)
 PUMPING TEMPERATURE (°C):
 22 NORMAL 30 MAX _____ MIN _____
 SPECIFIC GRAVITY 0.65 MAXIMUM _____ MINIMUM _____
 SPECIFIC HEAT ~ 2.2 Cp (KJ/Kg°C)
 VISCOSITY (Cp) 0.29
 VAPOR PRESSURE 0.25 (bara) @ 30 (°C)
 CORROSIVE/EROSIVE AGENTS
 CHLORIDE CONCENTRATION (PPM) _____
 H₂S CONCENTRATION (PPM) _____

23 LIQUID TOXIC FLAMMABLE OTHER

26 **PERFORMANCE SITE AND UTILITY DATA (NOTE 11)**

27 NUMBER OF FEEDS 1 RATED CAPACITY (m³/h) 0.007
 NPSH REQUIRED (m) Flooded
 KW RATED VTA AT RELIEF SETTING _____
 PLUNGER SPEED (STROKES/MIN) VTA DESIGN MAX _____
 DIAMETER (mm) VTA LENGTH OF STROKE (mm) _____

28 LOCATION INDOOR OUTDOOR
 HEATED UNHEATED UNDER ROOF
 ELECTRICAL AREA CLASS ExdIBT4 GROUP _____ DIV _____
 WINTERIZATION REQ'D _____ TROPICALIZATION REQ'D _____

29 SITE DATA (Note 4)
 RANGE OF AMBIENT TEMPS: MIN/MAX -28 / 44 °C
 UNUSUAL CONDITIONS
 DUST FUMES SALT ATMOSPHERE
 OTHER Corrosive
 UTILITY CONDITIONS

37 **CONSTRUCTION**

CONNECTIONS	SIZE	ANSI RATING	FACING	POSITION
38 SUCTION	<u>1/2"</u>	<u>600#</u>	<u>RF</u>	
39 DISCHARGE	<u>1/2"</u>	<u>600#</u>	<u>RF</u>	
40 FLUSH				

41 LIQUID END JACKET REQ'D

42 TYPE (Note 2) DIAPHRAGM PLUNGER

43 DIAPHRAGM DIA (mm) _____ NO REQ.

44 VALVES/FEED SUCTION DISCHARGE

45 TYPE _____

46 NUMBER _____

ELECTRICITY DRIVERS HEATING CONTROL SHUTDOWN

VOLTAGE 400 230

HERTZ 50 50

PHASE 3 1

COOLING WATER INLET RETURN DESIGN MAX Δ

TEMP (°C) _____ MAX _____

PRESS. (BAR) _____

SOURCE _____

INSTRUMENT AIR NOR MAX MIN

PRESSURE (BARG) _____

APPLICABLE SPECIFICATIONS:

- API 675 POSITIVE DISPLACEMENT PUMPS - CONTROLLED VOLUME
- GOVERNING SPECIFICATION (IF DIFFERENT)

50 REMARKS
51
52
53
55

PROJECT: PP-PE PILOT PLANT

client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: Data Sheet for Atmer Metering Pump (P-141)

1 MATERIAL *				CONTROLS			
2	LIQUID END	AISI 316L		TYPE:	SIGNAL:		
3	CONTOUR PLATE	AISI 316L		<input type="radio"/> MANUAL	<input checked="" type="radio"/> REMOTE	<input type="radio"/> PNEUMATIC (Note 5)	
4	HYDRAULIC DIAPHRAGM	PTFE		<input checked="" type="radio"/> AUTOMATIC	<input type="radio"/> LOCAL	<input type="radio"/> ELECTRONIC (Note 5)	
5	PROCESS DIAPHRAGM	PTFE		STROKE CONTROL:			
6	PLUNGER	X 40 Cr Mo V 5 11 Ku		PNEUMATIC (PSIG):			
7	LANTERN RING			MINIMUM	3	MAXIMUM 15	
8	PACKING GLAND			ELECTRONIC(mA):			
9	PACKING			MINIMUM	4	MAXIMUM 20	
10	VALVE	AISI 316L		OTHER PURCHASE REQUIREMENTS			
11	VALVE SEAT	AISI 316L		NAMEPLATE UNITS <input type="radio"/> CUSTOMARY <input checked="" type="radio"/> SI			
12	VALVE GUIDE	AISI 316L		<input type="radio"/> VENDOR FURNISHED PROCESS PIPING			
13	VALVE BODY	AISI 316L		<input checked="" type="radio"/> VENDOR REVIEW PIPING DRAWINGS <input checked="" type="radio"/> VENDOR FURNISHED PULSATION SUPPRESSION DEVICES (Tag No. V-143) <input checked="" type="radio"/> VENDOR FURNISHED RELIEF VALVE <input checked="" type="radio"/> INTERNAL <input checked="" type="radio"/> EXTERNAL <input checked="" type="checkbox"/> RELIEF VALVE SETTING (BARG) (Note 6) <input checked="" type="radio"/> VENDOR FURNISHED BACK-PRESSURE VALVE (IF REQUIRED) <input checked="" type="radio"/> DOUBLE CHECK VALVES REQUIRED <input checked="" type="radio"/> OIL-FILLED PRESSURE GAUGES REQUIRED <input type="radio"/> VENDOR FURNISHED CONTROL PANEL <input type="radio"/> BASEPLATE PREPARED FOR EPOXY GROUT <input checked="" type="radio"/> PROVIDE TECHNICAL DATA MANUAL <input type="radio"/> <input type="radio"/>			
14	VALVE GASKET	VITON		<input type="radio"/> DOMESTIC <input checked="" type="radio"/> EXPORT <input checked="" type="radio"/> EXPORT BOXING <input checked="" type="radio"/> OUTDOOR STORAGE MORE THAN 12 MONTHS			
15	FRAME	VTA		WEIGHTS (KG)			
16	SPECIAL MATERIAL TESTS (2.13.1.3)			<input type="checkbox"/> PUMP <input type="checkbox"/> BASE <input type="checkbox"/> GEAR <input type="checkbox"/> DRIVER			
17				DRIVERS			
18	<input type="radio"/> LOW AMBIENT TEMPERATURE MATERIALS TESTS (2.13.5)			<input checked="" type="radio"/> MOTOR: ELECTRIC MOTOR (Note 8) <input checked="" type="checkbox"/> MANUFACTURER VTA <input checked="" type="checkbox"/> TYPE ASYNCHRONOUS <input type="checkbox"/> FRAME NO. <input checked="" type="radio"/> CONSTANT SPEED <input type="checkbox"/> VARIABLE SPEED <input checked="" type="checkbox"/> KW VTA RPM <input checked="" type="radio"/> VOLTS 400 PHASE 3 <input checked="" type="radio"/> HERTZ 50 SERVICE FACTOR <input checked="" type="radio"/> ENCLOSURE IP55, EExd IIB T4 <input type="radio"/> OTHER (SEE SEPARATE DATA SHEETS) <input type="radio"/> GAS DRIVEN <input type="radio"/> STEAM TURBINE <input type="radio"/> OTHER			
19	*All the process side materials shall be S.S.316			PREPARATION FOR SHIPMENT			
20	QA INSPECTION AND TEST			<input type="checkbox"/> PUMP <input type="checkbox"/> BASE <input type="checkbox"/> GEAR <input type="checkbox"/> DRIVER			
21	<input checked="" type="radio"/> COMPLIANCE WITH INSPECTORS CHECK LIST <input checked="" type="radio"/> CERTIFICATION OF MATERIALS <input checked="" type="radio"/> FINAL ASSEMBLY CLEARANCES <input checked="" type="radio"/> SURFACE AND SUBSURFACE EXAMINATIONS <input checked="" type="radio"/> RADIOGRAPHY <input checked="" type="radio"/> ULTRASONIC <input checked="" type="radio"/> MAGNETIC PARTICLE <input checked="" type="radio"/> LIQUID PENETRANT <input checked="" type="radio"/> CLEANLINESS PRIOR TO FINAL ASSEMBLY <input type="radio"/> HARDNESS OF PARTS, WELDS & HEAT AFFECTED ZONES <input type="radio"/> FURNISH PROCEDURES FOR OPTIONAL TESTS			<input type="checkbox"/> PUMP <input type="checkbox"/> BASE <input type="checkbox"/> GEAR <input type="checkbox"/> DRIVER			
22				DRIVERS			
23				<input checked="" type="radio"/> MOTOR: ELECTRIC MOTOR (Note 8) <input checked="" type="checkbox"/> MANUFACTURER VTA <input checked="" type="checkbox"/> TYPE ASYNCHRONOUS <input type="checkbox"/> FRAME NO. <input checked="" type="radio"/> CONSTANT SPEED <input type="checkbox"/> VARIABLE SPEED <input checked="" type="checkbox"/> KW VTA RPM <input checked="" type="radio"/> VOLTS 400 PHASE 3 <input checked="" type="radio"/> HERTZ 50 SERVICE FACTOR <input checked="" type="radio"/> ENCLOSURE IP55, EExd IIB T4 <input type="radio"/> OTHER (SEE SEPARATE DATA SHEETS) <input type="radio"/> GAS DRIVEN <input type="radio"/> STEAM TURBINE <input type="radio"/> OTHER			
24				WEIGHTS (KG)			
25				<input type="checkbox"/> PUMP <input type="checkbox"/> BASE <input type="checkbox"/> GEAR <input type="checkbox"/> DRIVER			
26				DRIVERS			
27				<input checked="" type="radio"/> MOTOR: ELECTRIC MOTOR (Note 8) <input checked="" type="checkbox"/> MANUFACTURER VTA <input checked="" type="checkbox"/> TYPE ASYNCHRONOUS <input type="checkbox"/> FRAME NO. <input checked="" type="radio"/> CONSTANT SPEED <input type="checkbox"/> VARIABLE SPEED <input checked="" type="checkbox"/> KW VTA RPM <input checked="" type="radio"/> VOLTS 400 PHASE 3 <input checked="" type="radio"/> HERTZ 50 SERVICE FACTOR <input checked="" type="radio"/> ENCLOSURE IP55, EExd IIB T4 <input type="radio"/> OTHER (SEE SEPARATE DATA SHEETS) <input type="radio"/> GAS DRIVEN <input type="radio"/> STEAM TURBINE <input type="radio"/> OTHER			
28				PREPARATION FOR SHIPMENT			
29				<input type="checkbox"/> PUMP <input type="checkbox"/> BASE <input type="checkbox"/> GEAR <input type="checkbox"/> DRIVER			
30				DRIVERS			
31				<input checked="" type="radio"/> MOTOR: ELECTRIC MOTOR (Note 8) <input checked="" type="checkbox"/> MANUFACTURER VTA <input checked="" type="checkbox"/> TYPE ASYNCHRONOUS <input type="checkbox"/> FRAME NO. <input checked="" type="radio"/> CONSTANT SPEED <input type="checkbox"/> VARIABLE SPEED <input checked="" type="checkbox"/> KW VTA RPM <input checked="" type="radio"/> VOLTS 400 PHASE 3 <input checked="" type="radio"/> HERTZ 50 SERVICE FACTOR <input checked="" type="radio"/> ENCLOSURE IP55, EExd IIB T4 <input type="radio"/> OTHER (SEE SEPARATE DATA SHEETS) <input type="radio"/> GAS DRIVEN <input type="radio"/> STEAM TURBINE <input type="radio"/> OTHER			
32	TESTS			WEIGHTS (KG)			
33	HYDROSTATIC	REQ'D	WIT	OBS	<input type="checkbox"/> PUMP <input type="checkbox"/> BASE <input type="checkbox"/> GEAR <input type="checkbox"/> DRIVER		
34	STEADY STATE ACCURACY	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	DRIVERS		
35	REPEATABILITY	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/> MOTOR: ELECTRIC MOTOR (Note 8) <input checked="" type="checkbox"/> MANUFACTURER VTA <input checked="" type="checkbox"/> TYPE ASYNCHRONOUS <input type="checkbox"/> FRAME NO. <input checked="" type="radio"/> CONSTANT SPEED <input type="checkbox"/> VARIABLE SPEED <input checked="" type="checkbox"/> KW VTA RPM <input checked="" type="radio"/> VOLTS 400 PHASE 3 <input checked="" type="radio"/> HERTZ 50 SERVICE FACTOR <input checked="" type="radio"/> ENCLOSURE IP55, EExd IIB T4 <input type="radio"/> OTHER (SEE SEPARATE DATA SHEETS) <input type="radio"/> GAS DRIVEN <input type="radio"/> STEAM TURBINE <input type="radio"/> OTHER		
36	LINEARITY	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	WEIGHTS (KG)		
37	PERFORMANCE / MECHANICAL RUN	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	DRIVERS		
38		<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/> MOTOR: ELECTRIC MOTOR (Note 8) <input checked="" type="checkbox"/> MANUFACTURER VTA <input checked="" type="checkbox"/> TYPE ASYNCHRONOUS <input type="checkbox"/> FRAME NO. <input checked="" type="radio"/> CONSTANT SPEED <input type="checkbox"/> VARIABLE SPEED <input checked="" type="checkbox"/> KW VTA RPM <input checked="" type="radio"/> VOLTS 400 PHASE 3 <input checked="" type="radio"/> HERTZ 50 SERVICE FACTOR <input checked="" type="radio"/> ENCLOSURE IP55, EExd IIB T4 <input type="radio"/> OTHER (SEE SEPARATE DATA SHEETS) <input type="radio"/> GAS DRIVEN <input type="radio"/> STEAM TURBINE <input type="radio"/> OTHER		
39	LUBRICATION FLUID			WEIGHTS (KG)			
40	<input checked="" type="checkbox"/> CRANKCASE VTA	<input type="checkbox"/> INTERMEDIATE		DRIVERS			
41	<input checked="" type="checkbox"/> HYDRAULIC FLUID VTA			<input checked="" type="radio"/> MOTOR: ELECTRIC MOTOR (Note 8) <input checked="" type="checkbox"/> MANUFACTURER VTA <input checked="" type="checkbox"/> TYPE ASYNCHRONOUS <input type="checkbox"/> FRAME NO. <input checked="" type="radio"/> CONSTANT SPEED <input type="checkbox"/> VARIABLE SPEED <input checked="" type="checkbox"/> KW VTA RPM <input checked="" type="radio"/> VOLTS 400 PHASE 3 <input checked="" type="radio"/> HERTZ 50 SERVICE FACTOR <input checked="" type="radio"/> ENCLOSURE IP55, EExd IIB T4 <input type="radio"/> OTHER (SEE SEPARATE DATA SHEETS) <input type="radio"/> GAS DRIVEN <input type="radio"/> STEAM TURBINE <input type="radio"/> OTHER			
42	ACCESSORIES			WEIGHTS (KG)			
43	<input type="checkbox"/> SPEED REDUCER MANUFACTURER			DRIVERS			
44	<input checked="" type="radio"/> INTEGRAL	<input type="radio"/> SEPARATE		<input checked="" type="radio"/> MOTOR: ELECTRIC MOTOR (Note 8) <input checked="" type="checkbox"/> MANUFACTURER VTA <input checked="" type="checkbox"/> TYPE ASYNCHRONOUS <input type="checkbox"/> FRAME NO. <input checked="" type="radio"/> CONSTANT SPEED <input type="checkbox"/> VARIABLE SPEED <input checked="" type="checkbox"/> KW VTA RPM <input checked="" type="radio"/> VOLTS 400 PHASE 3 <input checked="" type="radio"/> HERTZ 50 SERVICE FACTOR <input checked="" type="radio"/> ENCLOSURE IP55, EExd IIB T4 <input type="radio"/> OTHER (SEE SEPARATE DATA SHEETS) <input type="radio"/> GAS DRIVEN <input type="radio"/> STEAM TURBINE <input type="radio"/> OTHER			
45	MODEL	WORM GEAR		WEIGHTS (KG)			
46	RATIO	10:1		DRIVERS			
47	<input type="checkbox"/> BASEPLATE UNDER			<input checked="" type="radio"/> MOTOR: ELECTRIC MOTOR (Note 8) <input checked="" type="checkbox"/> MANUFACTURER VTA <input checked="" type="checkbox"/> TYPE ASYNCHRONOUS <input type="checkbox"/> FRAME NO. <input checked="" type="radio"/> CONSTANT SPEED <input type="checkbox"/> VARIABLE SPEED <input checked="" type="checkbox"/> KW VTA RPM <input checked="" type="radio"/> VOLTS 400 PHASE 3 <input checked="" type="radio"/> HERTZ 50 SERVICE FACTOR <input checked="" type="radio"/> ENCLOSURE IP55, EExd IIB T4 <input type="radio"/> OTHER (SEE SEPARATE DATA SHEETS) <input type="radio"/> GAS DRIVEN <input type="radio"/> STEAM TURBINE <input type="radio"/> OTHER			
48	<input type="checkbox"/> COUPLING MANUFACTURER			WEIGHTS (KG)			
49	<input type="checkbox"/> TYPE Flexible			DRIVERS			
50	REMARKS			WEIGHTS (KG)			

Document No.: 100-DAS-A4-RE-0017

Rev.: 0

Owner Job No.:

Type: DAS

Page :2 of 3

PROJECT: PP-PE PILOT PLANT

client:



TITLE: Data Sheet for Atmer Metering Pump (P-141)

NOTES:

- Note 1 : Design temperature : 100 °C , Design Pressure : 100 barg.
Note 2: Pump shall have a double membrane system and a membrane rupture indicator.
Note 3: 100 gr/lit Atmer concentration in hexane.
Note 4: See "Engineering Specification for Site Conditions", Doc. No. 900-SPC-A4-PEM-0001.
Note5: With "I" to "P" Converter.
Note 6: Setting Pressure of internal oil relieving valve : 70 barg and for external 65barg.
Note 7 : Pressure at suction vessel : 1.2 bara.
Note 8 : ALL ELECTRICAL MOTORS SHALL BE IN ACCORDANCE WITH "TECHNICAL SPECIFICATION FOR LV MOTOR " DOC.No.900-SPC-A4-EE-0005. MOTOR ENCLOSURES SHALL BE OF TOTALLY ENCLOSED FAN-COOLED (TEFC).
Note 9 : Continuous operation.
Note 10 : T Pump shall be magnetic type dirive
Note 11: REFERE TO "UTILITY CONDITION" DOC.No.: 900-SPC-A4-PR-0006.

LICENSOR:

Document No.: 100-DAS-A4-RE-0017

Rev.: 02

Owner Job No.:

Type: DAS

Page :3of 3

PROJECT: PP-PE PILOT PLANT

client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: Data Sheet for Propylene Feeding Pump (P-321)

DATA SHEET FOR PROPYLENE FEEDING PUMP (P-321)

Document No.:

Rev.: 0

Owner Job No.:

Type: DAS

Page A

PROJECT: PP-PE PILOT PLANT

client:



Title: Data Sheet for Propylene Feeding Pump (P-321)

REV.	0	1	2	3	4	5	REV.	0	1	2	3	4	5	REV.	0	1	2	3	4	5
PAGE							PAGE							PAGE						
A	X																			
B	X																			
1	X																			
2	X																			
3	X																			

5					
4					
3					
2					
1					
0	12/28/2021	K.A	M.N	AA.SH	IFA
Rev.	Date	Prepared By	Checked By	Approved By	Status

Document Revision

Document No.:	Rev.: 0
Owner Job No.:	Type: DAS
	Page B

PROJECT: PP-PE PILOT PLANT

client:



Title: Data Sheet for Propylene Feeding Pump (P-321)

1	APPLICABLE TO: <input checked="" type="radio"/> PROPOSAL <input type="radio"/> PURCHASE <input type="radio"/> AS BUILT																										
2	FOR <u>NPC R&T</u> UNIT <u>300</u>																										
3	SITE <u>NPC R&T CENTRE-ARAK-IRAN</u> NO. OF PUMPS REQUIRED <u>1</u>																										
4	SERVICE <u>Propylene Feeding (Metering) Pump</u> MODEL _____ SIZE AND TYPE <u>DIAPHRAGM PUMP</u>	2																									
5	MANUFACTURER _____ SERIAL NO. _____																										
6	NOTE: <input type="radio"/> INDICATES INFORMATION TO BE COMPLETED BY PURCHASER <input type="checkbox"/> BY MANUFACTURER																										
7	GENERAL																										
8	NO. MOTOR DRIVEN <u>1</u> OTHER DRIVER TYPE _____																										
9	PUMP ITEM NO'S <u>P-321</u> PUMP ITEM NO'S _____																										
10	MOTOR ITEM NO'S <u>PM-321</u> DRIVER ITEM NO'S _____ GEAR ITEM NO'S _____																										
11	MOTOR PROVIDED BY <u>PUMP VENDOR</u> DRIVER PROVIDED BY _____ GEAR PROVIDED BY _____																										
12	MOTOR MOUNTED BY <u>PUMP VENDOR</u> DRIVER MOUNTED BY _____ GEAR MOUNTED BY _____																										
13	MOTOR DATA SHEET NO. _____ DRIVER DATA SHEET NO. _____ GEAR DATA SHEET NO. _____																										
14	OPERATING CONDITIONS (Note 1)																										
15	● CAPACITY @ PT (m ³ /h):																										
16	NORMAL <u>0.016</u> MAXIMUM <u>0.02</u> RATED <u>0.022</u>																										
17	● DISCHARGE PRESSURE (BARA):																										
18	MAXIMUM _____ MINIMUM _____ NORMAL <u>56</u>																										
19	● SUCTION PRESSURE (BARA):																										
20	MAXIMUM <u>26</u> MINIMUM _____ NORMAL <u>19</u>																										
21	● DIFFERENTIAL PRESSURE (BAR):																										
22	MAXIMUM _____ MINIMUM _____ NORMAL <u>37</u>																										
23	● NPSH AVAILABLE (m) <u>6</u>																										
24	WITHOUT ACCELERATION HEAD _____ ACTUAL _____																										
25	● DIFFERENTIAL HEAD (m) _____																										
26	<input type="checkbox"/> PERFORMANCE																										
27	■ NUMBER OF FEEDS <u>1</u> RATED CAPACITY (m ³ /h) <u>0.022</u>																										
28	■ NPSH REQUIRED (m) <u>Flooded</u>																										
29	■ KW RATED <u>VTA</u> AT RELIEF SETTING _____																										
30	■ PLUNGER SPEED (STROKES/MIN) <u>VTA</u> DESIGN MAX _____																										
31	■ DIAMETER (mm) <u>VTA</u> LENGTH OF STROKE (mm) _____																										
32	PUMP HEAD: <u>VTA</u>																										
33	MAXIMUM PRESSURE (BARG) <u>VTA</u>																										
34	<input type="checkbox"/> HYDRO TEST PRESSURE (BARG) _____																										
35	<input type="checkbox"/> MAX DISCH PRESS. W/ JOB DRIVER (BARG) _____																										
36	<input type="checkbox"/> MAX KW BASIS GEAR STRENGTH _____																										
37	CONSTRUCTION																										
38	<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>SIZE</th> <th>ANSI RATING</th> <th>FACING</th> <th>POSITION</th> </tr> </thead> <tbody> <tr> <td>CONNECTIONS</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>SUCTION</td> <td><u>1/2"</u></td> <td><u>#600</u></td> <td><u>RF</u></td> <td></td> </tr> <tr> <td>DISCHARGE</td> <td><u>1/2"</u></td> <td><u>#600</u></td> <td><u>RF</u></td> <td></td> </tr> <tr> <td>FLUSH</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>			SIZE	ANSI RATING	FACING	POSITION	CONNECTIONS					SUCTION	<u>1/2"</u>	<u>#600</u>	<u>RF</u>		DISCHARGE	<u>1/2"</u>	<u>#600</u>	<u>RF</u>		FLUSH				
	SIZE	ANSI RATING	FACING	POSITION																							
CONNECTIONS																											
SUCTION	<u>1/2"</u>	<u>#600</u>	<u>RF</u>																								
DISCHARGE	<u>1/2"</u>	<u>#600</u>	<u>RF</u>																								
FLUSH																											
39	LIQUID END <input type="checkbox"/> JACKET REQ'D																										
40	TYPE (Note 2) <input checked="" type="radio"/> DIAPHRAGM <input type="radio"/> PLUNGER																										
41	<input type="checkbox"/> DIAPHRAGM DIA (mm) _____ NO REQ.																										
42	<input type="checkbox"/> VALVES/FEED SUCTION _____ DISCHARGE _____																										
43	TYPE _____																										
44	NUMBER _____																										
45	LIQUID																										
46	● TYPE OR NAME OF LIQUID <u>Propylene</u>																										
47	● PUMPING TEMPERATURE (°C):																										
48	NORMAL <u>40</u> MAX _____ MIN _____																										
49	● SPECIFIC GRAVITY <u>0.485</u> MAXIMUM _____ MINIMUM _____																										
50	● SPECIFIC HEAT <u>3.049</u> (KJ/Kg°C)																										
51	● VISCOSITY (Cp) <u>0.09</u> MAXIMUM _____																										
52	● VAPOR PRESSURE <u>135</u> (psig) @ <u>+20</u> (°C)																										
53	● CORROSIVE/EROSIVE AGENTS <u>N/A</u>																										
54	● CHLORIDE CONCENTRATION (PPM) <u>N/A</u>																										
55	● H ₂ S CONCENTRATION (PPM) <u>N/A</u>																										
56	LIQUID <input type="checkbox"/> TOXIC <input checked="" type="checkbox"/> FLAMMABLE <input type="checkbox"/> HAZARDOUS																										
57	SITE AND UTILITY DATA																										
58	LOCATION <input checked="" type="radio"/> INDOOR <input type="radio"/> OUTDOOR																										
59	<input type="radio"/> HEATED <input checked="" type="radio"/> UNHEATED <input type="radio"/> UNDER ROOF																										
60	● ELECTRICAL AREA CLASS <u>I</u> GROUP <u>D,T4</u> DIV <u>2</u>																										
61	● WINTERIZATION REQ'D <input type="checkbox"/> TROPICALIZATION REQ'D <input type="checkbox"/>																										
62	SITE DATA (Note 4)																										
63	● RANGE OF AMBIENT TEMPS: MIN/MAX <u>-28</u> / <u>44</u> °C																										
64	UNUSUAL CONDITIONS																										
65	● DUST <input checked="" type="radio"/> FUMES <input type="radio"/> SALT ATMOSPHERE																										
66	● OTHER <u>Corrosive</u>																										
67	● UTILITY CONDITIONS																										
68	ELECTRICITY DRIVERS HEATING CONTROL SHUTDOWN																										
69	VOLTAGE <u>400</u> <u>230</u>																										
70	HERTZ <u>50</u> <u>50</u>																										
71	PHASE <u>3</u> <u>1</u>																										
72	COOLING WATER INLET RETURN DESIGN MAX Δ																										
73	TEMP (°C) _____ MAX _____																										
74	PRESS. (BAR) _____																										
75	SOURCE _____																										
76	INSTRUMENT AIR NOR MAX MIN																										
77	PRESSURE (BARG) _____																										
78	APPLICABLE SPECIFICATIONS:																										
79	● API 675 POSITIVE DISPLACEMENT PUMPS - CONTROLLED VOLUME																										
80	<input type="checkbox"/> GOVERNING SPECIFICATION (IF DIFFERENT)																										
81	REMARKS																										
82	Ex-group: ExdIIBT4																										
83																											

Document No.:

Rev.: 0

Owner Job No.:

Type: DAS

Page 1 of 3

PROJECT: PP-PE PILOT PLANT

client:



Title: Data Sheet for Propylene Feeding Pump (P-321)

1	■ MATERIAL *		
2	LIQUID END	AISI 316L	
3	CONTOUR PLATE	AISI 316L	
4	HYDRAULIC DIAPHRAGM	PTFE	
5	PROCESS DIAPHRAGM	PTFE	
6	PLUNGER	AISI 316L	
7	LANTERN RING		
8	PACKING GLAND		
9	PACKING		
10	VALVE	AISI 316L	
11	VALVE SEAT	AISI 316L	
12	VALVE GUIDE	AISI 316L	
13	VALVE BODY	AISI 316L	
14	VALVE GASKET	VITON	
15	FRAME	VTA	
16	SPECIAL MATERIAL TESTS (2.13.1.3)		
17			
18	<input type="checkbox"/> LOW AMBIENT TEMPERATURE MATERIALS TESTS (2.13.5)		
19	*All the process side materials shall be S.S.316		
20	QA INSPECTION AND TEST		
21	<input checked="" type="checkbox"/> COMPLIANCE WITH INSPECTORS CHECK LIST		
22	<input checked="" type="checkbox"/> CERTIFICATION OF MATERIALS		
23	<input checked="" type="checkbox"/> FINAL ASSEMBLY CLEARANCES		
24	<input checked="" type="checkbox"/> SURFACE AND SUBSURFACE EXAMINATIONS		
25	<input checked="" type="checkbox"/> RADIOGRAPHY		
26	<input checked="" type="checkbox"/> ULTRASONIC		
27	<input checked="" type="checkbox"/> MAGNETIC PARTICLE		
28	<input checked="" type="checkbox"/> LIQUID PENETRANT		
29	<input checked="" type="checkbox"/> CLEANLINESS PRIOR TO FINAL ASSEMBLY		
30	<input type="checkbox"/> HARDNESS OF PARTS, WELDS & HEAT AFFECTED ZONES		
31	<input type="checkbox"/> FURNISH PROCEDURES FOR OPTIONAL TESTS		
32	TESTS	REQ'D	WIT OBS
33	HYDROSTATIC	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/>
34	STEADY STATE ACCURACY	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/>
35	REPEATABILITY	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/>
36	LINEARITY	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/>
37	PERORMANCE / MECHANICAL RUN	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/>
38		<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>
39	LUBRICATION FLUID		
40	<input checked="" type="checkbox"/> CRANKCASE	VTA	<input type="checkbox"/> INTERMEDIATE
41	<input checked="" type="checkbox"/> HYDRAULIC FLUID	VTA	
42	ACCESSORIES		
43	<input type="checkbox"/> SPEED REDUCER MANUFACTURER		
44	<input checked="" type="checkbox"/> INTEGRAL	<input type="checkbox"/> SEPARATE	
45	MODEL	WORM GEAR	
46	RATIO	10:1	
47	<input type="checkbox"/> BASEPLATE UNDER		
48	<input type="checkbox"/> COUPLING MANUFACTURER		
49	<input type="checkbox"/> TYPE	Flexible	

CONTROLS		
TYPE:	SIGNAL:	
<input type="checkbox"/> MANUAL	<input checked="" type="checkbox"/> REMOTE	<input type="checkbox"/> PNEUMATIC (Note 5)
<input checked="" type="checkbox"/> AUTOMATIC	<input type="checkbox"/> LOCAL	<input type="checkbox"/> ELECTRONIC (Note 5)
STROKE CONTROL:		
PNEUMATIC (PSIG):		
MINIMUM	3	MAXIMUM 15
ELECTRONIC(mA):		
MINIMUM	4	MAXIMUM 20
OTHER PURCHASE REQUIREMENTS		
NAMEPLATE UNITS	<input type="checkbox"/> CUSTOMARY	<input checked="" type="checkbox"/> SI
<input type="checkbox"/> VENDOR FURNISHED PROCESS PIPING		
<input checked="" type="checkbox"/> VENDOR REVIEW PIPING DRAWINGS		
<input checked="" type="checkbox"/> VENDOR FURNISHED PULSATION SUPPRESSION DEVICES AT DI (Tag No. TK-321)		
<input checked="" type="checkbox"/> VENDOR FURNISHED RELIEF VALVE		
<input checked="" type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL		
<input checked="" type="checkbox"/> RELIEF VALVE SETTING (BARG) (Note 6)		
<input checked="" type="checkbox"/> VENDOR FURNISHED BACK-PRESSURE VALVE (IF REQUIRED)		
<input checked="" type="checkbox"/> DOUBLE CHECK VALVES REQUIRED		
<input checked="" type="checkbox"/> OIL-FILLED PRESSURE GAUGES REQUIRED		
<input type="checkbox"/> VENDOR FURNISHED CONTROL PANEL		
<input type="checkbox"/> BASEPLATE PREPARED FOR EPOXY GROUT		
<input checked="" type="checkbox"/> PROVIDE TECHNICAL DATA MANUAL		
<input type="checkbox"/>		
<input type="checkbox"/>		
PREPARATION FOR SHIPMENT		
<input checked="" type="checkbox"/> DOMESTIC	<input checked="" type="checkbox"/> EXPORT	<input checked="" type="checkbox"/> EXPORT BOXING
<input checked="" type="checkbox"/> OUTDOOR STORAGE MORE THAN 12 MONTHS		
WEIGHTS (KG)		
<input type="checkbox"/> PUMP	<input type="checkbox"/> BASE	<input type="checkbox"/> GEAR <input type="checkbox"/> DRIVER
DRIVERS		
<input checked="" type="checkbox"/> MOTOR:	ELECTRIC MOTOR (Note 7)	
<input checked="" type="checkbox"/> MANUFACTURER	VTA	
<input checked="" type="checkbox"/> TYPE	ASYNCHRONOUS	
<input type="checkbox"/> FRAME NO.		
<input checked="" type="checkbox"/> CONSTANT SPEED		
<input type="checkbox"/> VARIABLE SPEED		
<input checked="" type="checkbox"/> KW	VTA	RPM
<input checked="" type="checkbox"/> VOLTS	400	PHASE 3
<input checked="" type="checkbox"/> HERTZ	50	SERVICE FACTOR
<input checked="" type="checkbox"/> ENCLOSURE	IP55, EExd IIB T4	
<input type="checkbox"/> OTHER (SEE SEPARATE DATA SHEETS)		
<input type="checkbox"/> GAS DRIVEN		
<input type="checkbox"/> STEAM TURBINE		
<input type="checkbox"/> OTHER		

50 REMARKS _____

51

	Document No.:	Rev.: 0
	Owner Job No.:	Type: DAS
		Page 2 of 3

PROJECT: PP-PE PILOT PLANT

client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: Data Sheet for Propylene Feeding Pump (P-321)

NOTES:

- NOTE 1: DESIGN TEMPERATURE : 100 °C , DESIGN PRESSURE : 100 BARG.
NOTE 2: PUMP SHALL HAVE A DOUBLE MEMBRANE SYSTEM AND A MEMBRANE RUPTURE INDICATOR.
NOTE 3: PRESSURE AT SUCTION VESSEL : 19 BARA.
NOTE 4: SEE "ENGINEERING SPECIFICATION FOR SITE CONDITIONS", DOC. NO. 900-SPC-A4-PEM-0001.
NOTE 5: With "I" to "P" Converter.
NOTE 6: SET PRESSURE OF INTERNAL OIL RELIEVING VALVE : 70 BARG AND FOR EXTERNAL 65BARG
NOTE 7: ALL ELECTRICAL MOTORS SHALL BE IN ACCORDANCE WITH "TECHNICAL SPECIFICATION FOR LV MOTOR " DOC.NO.900-SPC-A4-EE-0005. MOTOR ENCLOSURES SHALL BE OF TOTALLY ENCLOSED FAN-COOLED (TEFC).
NOTE 8: PUMP SERVICE IS CONTINUOUS
NOTE 9: Ex-group: ExIICT4

Document No.:

Rev.: 0

Owner Job No.:

Type: DAS

Page 3 of 3

PROJECT: PP-PE PILOT PLANT

client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: Data Sheet for 1-Butene Condensed Pump (P-351)

DATA SHEET FOR 1-BUTENE CONDENSED PUMP (P-351)

Document No.:

Rev.: 0

Owner Job No.:

Type: DAS

Page A

PROJECT: PP-PE PILOT PLANT

client:



Title: Data Sheet for 1-Butene Condensed Pump (P-351)

REV. PAGE	0	1	2	3	4	5	REV. PAGE	0	1	2	3	4	5	REV. PAGE	0	1	2	3	4	5	
A	X																				
B	X																				
1	X																				
2	X																				
3	X																				

5				
4				
3				
2				
1				
0	12/28/2021	K.A	M.N	AA.SH
Rev.	Date	Prepared By	Checked By	Approved By
				Status

Document Revision

Document No.:		Rev.: 0
Owner Job No.:		Type: DAS
		Page B

PROJECT: PP-PE PILOT PLANT

client:



Title: Data Sheet for 1-Butene Condensed Pump (P-351)

1 APPLICABLE TO: PROPOSAL PURCHASE AS BUILT

2 FOR NPC R&T UNIT 300

3 SITE NPC R&T CENTRE-ARAK-IRAN NO. OF PUMPS REQUIRED 1

4 SERVICE 1-Butene Condensed Metering Pump MODEL _____ SIZE AND TYPE DIAPHRAGM PUMP

5 MANUFACTURER _____ SERIAL NO. _____

6 NOTE: INDICATES INFORMATION TO BE COMPLETED BY PURCHASER BY MANUFACTURER

7 **GENERAL**

8 NO. MOTOR DRIVEN 1 OTHER DRIVER TYPE _____

9 PUMP ITEM NO'S P-351 PUMP ITEM NO'S _____

10 MOTOR ITEM NO'S PM-351 DRIVER ITEM NO'S _____ GEAR ITEM NO'S _____

11 MOTOR PROVIDED BY PUMP VENDOR DRIVER PROVIDED BY _____ GEAR PROVIDED BY _____

12 MOTOR MOUNTED BY PUMP VENDOR DRIVER MOUNTED BY _____ GEAR MOUNTED BY _____

13 MOTOR DATA SHEET NO. _____ DRIVER DATA SHEET NO. _____ GEAR DATA SHEET NO. _____

14 **OPERATING CONDITIONS (Note 1)** **LIQUID**

15 ● CAPACITY @ PT (m³/h):

16 NORMAL 0.03 MAXIMUM 0.04 RATED _____

17 ● DISCHARGE PRESSURE (BARA):

18 MAXIMUM _____ MINIMUM _____ NORMAL 25

19 ● SUCTION PRESSURE (BARA):

20 MAXIMUM 24 MINIMUM _____ NORMAL 21

21 ● DIFFERENTIAL PRESSURE (BAR):

22 MAXIMUM _____ MINIMUM _____ NORMAL 4

23 ● NPSH AVAILABLE (m) _____

24 WITHOUT ACCELERATION HEAD _____ ACTUAL _____

25 ● DIFFERENTIAL HEAD (m) _____

26 **PERFORMANCE** **SITE AND UTILITY DATA**

27 ■ NUMBER OF FEEDS 1 RATED CAPACITY (m³/h) 0.04

28 ■ NPSH REQUIRED (m) Flooded

29 ■ KW RATED VTA AT RELIEF SETTING _____

30 ■ PLUNGER SPEED (STROKES/MIN) VTA DESIGN MAX _____

31 ■ DIAMETER (mm) VTA LENGTH OF STROKE (mm) _____

32 PUMP HEAD: VTA

33 MAXIMUM PRESSURE (BARG) VTA

34 HYDRO TEST PRESSURE (BARG) _____

35 MAX DISCH PRESS. W/ JOB DRIVER (BARG) _____

36 MAX KW BASIS GEAR STRENGTH _____

37 **CONSTRUCTION**

CONNECTIONS	SIZE	ANSI RATING	FACING	POSITION
38 SUCTION	<u>1/2"</u>	<u># 300</u>	<u>RF</u>	
39 DISCHARGE	<u>1/2"</u>	<u># 300</u>	<u>RF</u>	
40 FLUSH				

44 LIQUID END JACKET REQ'D

45 TYPE (Note 2) DIAPHRAGM PLUNGER

46 DIAPHRAGM DIA (mm) _____ NO REQ.

47 VALVES/FEED SUCTION _____ DISCHARGE _____

48 TYPE _____

49 NUMBER _____

50 REMARKS

51

52

53

54

55

● TYPE OR NAME OF LIQUID 1-Butene

● PUMPING TEMPERATURE (°C):

● NORMAL 105 MAX _____ MIN _____

● SPECIFIC GRAVITY 0.462 MAXIMUM _____ MINIMUM _____

● SPECIFIC HEAT 1.15 (KJ/Kg°C)

● VISCOSITY (Cp) 0.1 MAXIMUM _____

● VAPOR PRESSURE 66 (psig) @ +30 (°C)

● CORROSIVE/EROSIVE AGENTS N/A

● CHLORIDE CONCENTRATION (PPM) N/A

● H₂S CONCENTRATION (PPM) N/A

LIQUID ● TOXIC ● FLAMMABLE ● HAZARDOUS

● LOCATION INDOOR OUTDOOR

HEATED ● UNHEATED UNDER ROOF

● ELECTRICAL AREA CLASS I GROUP D,T4 DIV 2

● WINTERIZATION REQ'D TROPICALIZATION REQ'D

SITE DATA (Note 4)

● RANGE OF AMBIENT TEMPS: MIN/MAX -28 / 44 °C

UNUSUAL CONDITIONS

● DUST ● FUMES SALT ATMOSPHERE

● OTHER Corrosive

● UTILITY CONDITIONS

ELECTRICITY	DRIVERS	HEATING	CONTROL	SHUTDOWN
VOLTAGE <u>400</u>			<u>230</u>	
HERTZ <u>50</u>			<u>50</u>	
PHASE <u>3</u>			<u>1</u>	

COOLING WATER INLET _____ RETURN _____ DESIGN _____ MAX Δ _____

TEMP (°C) _____

PRESS. (BAR) _____

SOURCE _____

INSTRUMENT AIR _____ NOR _____ MAX _____ MIN _____

PRESSURE (BARG) _____

APPLICABLE SPECIFICATIONS:

● API 675 POSITIVE DISPLACEMENT PUMPS - CONTROLLED VOLUME

GOVERNING SPECIFICATION (IF DIFFERENT)

Document No.:

Rev.: 0

Owner Job No.:

Type: DAS

Page 1 of 3

PROJECT: PP-PE PILOT PLANT

client:



Title: Data Sheet for 1-Butene Condensed Pump (P-351)

1	■ MATERIAL *		
2	LIQUID END	AISI 316L	
3	CONTOUR PLATE	AISI 316L	
4	HYDRAULIC DIAPHRAGM	PTFE	
5	PROCESS DIAPHRAGM	PTFE	
6	PLUNGER	AISI 316L	
7	LANTERN RING		
8	PACKING GLAND		
9	PACKING		
10	VALVE	AISI 316L	
11	VALVE SEAT	AISI 316L	
12	VALVE GUIDE	AISI 316L	
13	VALVE BODY	AISI 316L	
14	VALVE GASKET	VITON	
15	FRAME	VTA	
16	SPECIAL MATERIAL TESTS (2.13.1.3)		
17			
18	<input type="checkbox"/> LOW AMBIENT TEMPERATURE MATERIALS TESTS (2.13.5)		
19	*All the process side materials shall be S.S.316		
20	QA INSPECTION AND TEST		
21	<input checked="" type="checkbox"/> COMPLIANCE WITH INSPECTORS CHECK LIST		
22	<input checked="" type="checkbox"/> CERTIFICATION OF MATERIALS		
23	<input checked="" type="checkbox"/> FINAL ASSEMBLY CLEARANCES		
24	<input checked="" type="checkbox"/> SURFACE AND SUBSURFACE EXAMINATIONS		
25	<input checked="" type="checkbox"/> RADIOGRAPHY		
26	<input checked="" type="checkbox"/> ULTRASONIC		
27	<input checked="" type="checkbox"/> MAGNETIC PARTICLE		
28	<input checked="" type="checkbox"/> LIQUID PENETRANT		
29	<input checked="" type="checkbox"/> CLEANLINESS PRIOR TO FINAL ASSEMBLY		
30	<input type="checkbox"/> HARDNESS OF PARTS, WELDS & HEAT AFFECTED ZONES		
31	<input type="checkbox"/> FURNISH PROCEDURES FOR OPTIONAL TESTS		
32	TESTS	REQ'D	WIT OBS
33	HYDROSTATIC	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/>
34	STEADY STATE ACCURACY	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/>
35	REPEATABILITY	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/>
36	LINEARITY	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/>
37	PERORMANCE / MECHANICAL RUN	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/>
38		<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>
39	LUBRICATION FLUID		
40	<input checked="" type="checkbox"/> CRANKCASE	VTA	<input type="checkbox"/> INTERMEDIATE
41	<input checked="" type="checkbox"/> HYDRAULIC FLUID	VTA	
42	ACCESSORIES		
43	<input type="checkbox"/> SPEED REDUCER MANUFACTURER _____		
44	<input checked="" type="checkbox"/> INTEGRAL	<input type="checkbox"/> SEPARATE	
45	MODEL	WORM GEAR	
46	RATIO	10:1	
47	<input type="checkbox"/> BASEPLATE UNDER _____		
48	<input type="checkbox"/> COUPLING MANUFACTURER _____		
49	<input type="checkbox"/> TYPE	Flexible	
50	REMARKS _____		
51			

CONTROLS		
TYPE:	SIGNAL:	
<input type="checkbox"/> MANUAL	<input checked="" type="checkbox"/> REMOTE	<input type="checkbox"/> PNEUMATIC (Note 5)
<input checked="" type="checkbox"/> AUTOMATIC	<input type="checkbox"/> LOCAL	<input type="checkbox"/> ELECTRONIC (Note 5)
STROKE CONTROL:		
PNEUMATIC (PSIG):		
MINIMUM	3	MAXIMUM 15
ELECTRONIC(mA):		
MINIMUM	4	MAXIMUM 20
OTHER PURCHASE REQUIREMENTS		
NAMEPLATE UNITS	<input type="checkbox"/> CUSTOMARY	<input checked="" type="checkbox"/> SI
<input type="checkbox"/> VENDOR FURNISHED PROCESS PIPING _____		
<input checked="" type="checkbox"/> VENDOR REVIEW PIPING DRAWINGS		
<input checked="" type="checkbox"/> VENDOR FURNISHED PULSATION SUPPRESSION DEVICES AT DI (Tag No. V-352)		
<input checked="" type="checkbox"/> VENDOR FURNISHED RELIEF VALVE		
<input checked="" type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL		
<input checked="" type="checkbox"/> RELIEF VALVE SETTING (BARG) (Note 6)		
<input checked="" type="checkbox"/> VENDOR FURNISHED BACK-PRESSURE VALVE (IF REQUIRED)		
<input checked="" type="checkbox"/> DOUBLE CHECK VALVES REQUIRED		
<input checked="" type="checkbox"/> OIL-FILLED PRESSURE GAUGES REQUIRED		
<input type="checkbox"/> VENDOR FURNISHED CONTROL PANEL		
<input type="checkbox"/> BASEPLATE PREPARED FOR EPOXY GROUT		
<input checked="" type="checkbox"/> PROVIDE TECHNICAL DATA MANUAL		
<input type="checkbox"/>		
<input type="checkbox"/>		
PREPARATION FOR SHIPMENT		
<input checked="" type="checkbox"/> DOMESTIC	<input checked="" type="checkbox"/> EXPORT	<input checked="" type="checkbox"/> EXPORT BOXING
<input checked="" type="checkbox"/> OUTDOOR STORAGE MORE THAN 12 MONTHS		
WEIGHTS (KG)		
<input type="checkbox"/> PUMP	<input type="checkbox"/> BASE	<input type="checkbox"/> GEAR <input type="checkbox"/> DRIVER
DRIVERS		
<input checked="" type="checkbox"/> MOTOR:	ELECTRIC MOTOR (Note 7)	
<input checked="" type="checkbox"/> MANUFACTURER	VTA	
<input checked="" type="checkbox"/> TYPE	ASYNCHRONOUS	
<input type="checkbox"/> FRAME NO. _____		
<input checked="" type="checkbox"/> CONSTANT SPEED _____		
<input type="checkbox"/> VARIABLE SPEED _____		
<input checked="" type="checkbox"/> KW	VTA	RPM _____
<input checked="" type="checkbox"/> VOLTS	400	PHASE 3
<input checked="" type="checkbox"/> HERTZ	50	SERVICE FACTOR _____
<input checked="" type="checkbox"/> ENCLOSURE	IP55, EExd IIB T4	
<input type="checkbox"/> OTHER (SEE SEPARATE DATA SHEETS)		
<input type="checkbox"/> GAS DRIVEN _____		
<input type="checkbox"/> STEAM TURBINE _____		
<input type="checkbox"/> OTHER _____		

Document No.:

Rev.: 0

Owner Job No.:

Type: DAS

Page 2 of 3

PROJECT: PP-PE PILOT PLANT

client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: Data Sheet for 1-Butene Condensed Pump (P-351)

NOTES:

- NOTE 1: DESIGN TEMPERATURE : 100 °C , DESIGN PRESSURE : 100 BARG.
NOTE 2: PUMP SHALL HAVE A DOUBLE MEMBRANE SYSTEM AND A MEMBRANE RUPTURE INDICATOR.
NOTE 3: PRESSURE AT SUCTION VESSEL : 19 BARA.
NOTE 4: SEE "ENGINEERING SPECIFICATION FOR SITE CONDITIONS", DOC. NO. 900-SPC-A4-PEM-0001.
NOTE 5: With "I" to "P" Converter.
NOTE 6: SET PRESSURE OF INTERNAL OIL RELIEVING VALVE : 70 BARG AND FOR EXTERNAL 65BARG
NOTE 7: ALL ELECTRICAL MOTORS SHALL BE IN ACCORDANCE WITH "TECHNICAL SPECIFICATION FOR LV MOTOR " DOC.NO.900-SPC-A4-EE-0005. MOTOR ENCLOSURES SHALL BE OF TOTALLY ENCLOSED FAN-COOLED (TEFC).
NOTE 8: PUMP SERVICE IS CONTINUOUS
NOTE 9: Ex-group: ExialIBT4


Document No.:

Rev.: 0

Owner Job No.:


Type: DAS

Page 3 of 3

PROJECT: PP-PE PILOT PLANT	Client: 
Title: Inspection and Test Plan for Pumps	شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی

INSPECTION & TEST PLAN FOR PUMPS

Document No.: 900-ITP-A4-RE-0001	Rev. : 0
Owner Job No.:	Type : ITP
Contract Job No.:	Page A

PROJECT: PP-PE PILOT PLANT	Client: 
Title: Inspection and Test Plan for Pumps	شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی

PAGE \ REV.	0	1	2	3	4	5	PAGE \ REV.	0	1	2	3	4	5	PAGE \ REV.	0	1	2	3	4	5
A	X																			
B	X																			
1	X																			
2	X																			
5																				
4																				
3																				
2																				
1																				
0	2021-12-29				K.A				M.N					AA.SH						IFA
Rev	Data				Prepared By				Checked By					Approved By						Status
Document Revision																				

Document No.: 900-ITP-A4-RE-0001	Rev. : 0
Owner Job No.:	Type : ITP
Contract Job No.:	Page B

PROJECT: PP-PE PILOT PLANT

Client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: Inspection And Test Plan for Pumps

2

2

No.	Inspection/Test Items	Procedure & Standards	Inspected By			
			O	P	V	C
1	Pre-inspection meeting required for above 100 Kw	Relevant Spec.	X	X	X	
2	Mill test reports	Relevant material Spec.	R	R	R	X
3	Material identification and markings	Approved procedure and drawings	S	S	M	X
4	Material test certificate in accordance with "Engineering Specification for Pumps"	Approved procedure	R	R	M	X
5	Material compliance certificate for gaskets, valves, piping items, etc.	Approved procedure	R	R	M	X
6	Manufacture's test certificate/calibration certificate for instruments	Approved procedure and drawings	R	R	M	X
7	Storage of materials and welding consumables	Approved procedure and drawings	S	S	M	
8	Sub order verification for Bought out items like drivers, piping etc.	Approved procedure	R	R	M	X
9	Inspection of Bought out items at sub vendor's works for drivers, piping etc.	Approved procedure and drawings	R	R	M	X
10	Non-destructive testing personal qualifications	Approved Qualification Certificate	R	R	M	
11	RT,UT,MT or PT(Review of all radiographs) (Note 1) (*)	Approved procedure	R	R	M	X
12	Execution of major repairs, NDE after repair (Note 3)	Approved procedure and drawings	H	H	M	X
13	Welder Qualifications for pressure casing (records or welder's list) Note: If inspector doubt welder's ability Inspector may requested welder for new qualification test	ASME Sec. IX or equivalent standards	R	R	M	X
14	Weld preparation and fit-up (Note 3)	Approved procedure and drawings	S	S	M	X
15	Workman ship, Cleanliness	Approved procedure and drawings	S	S	M	
16	Heat treatment execution (If applicable) (**)	Approved procedure	R	R	M	X
17	Adherence to approved procedures (welding, heat treatment, etc)	ASME Sec. IX or equivalent standards	S	S	M	X
18	Adherence to agreed inspection plan	Approved procedure and drawings	S	S	M	
19	Balancing test	Approved procedure	R	R	M	X
20	Visual and dimensional inspection at assembled condition before performance test	Approved procedure and drawings	W	W	M	X
21	Clearance and run out test (If applicable)	Approved procedure and drawings	R	R	M	X
22	Hydrostatic test of casing and barrel	Min 1.5 times of design Pres./ Approved procedure	H	H	M	X
23	Pneumatic test for casing (when specified)	Min 1.1 times of design Pres./ Approved procedure	W	W	M	X
24	Performance test (Note 2)	Approved procedure	H	H	M	X
25	Mechanical running test with vibration and bearing temperature measurement (Note 2)	Approved procedure	H	H	M	X
26	Dismantling inspection for casing internal, sleeve type bearings after test run (when specified) (***)	No defect shall be observed	W	W	M	X
27	NPSH test (when NPSHA-NPSHR is less than 1.0 m.) (Note 2)	Approved procedure	H	H	M	X
28	Motor test (when provided) Note : Inspection and witness is required for drivers of 175 Kw and above. Inspection (but no witnessing) is required for drivers below 175Kw	Approved procedure and drawings	W	W	M	X
29	Hydrostatic test of lube oil unit, when provided	Approved procedure and drawings	W	W	M	X
30	Shop running test for lube oil unit,when provided	Approved procedure and drawings	W	W	M	X
31	Visual (cleanliness) and dimensional inspection for lube oil unit after run test	Approved procedure and drawings	S	S	M	X
32	Sound level test	Approved procedure	H	H	M	X
33	Installation of wiring and conduit (ex proof examination if required)	Approved procedure and drawings	S	S	M	X
34	Other test as specified	Approved procedure and drawings	W	W	M	X
35	Surface preparation prior to painting , coating, lining	Approved procedure and drawings	S	S	M	

Document No.: 900-ITP-A4-RE-0001


Rev. : 0

Owner Job No.:

Type : ITP

Contract Job No.: 08-831-87-308

Page 1 OF 2

PROJECT: PP-PE PILOT PLANT	Client:  شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
Title: Inspection And Test Plan for Pumps	

36	Painting, Coating, Lining ,preservation, Pickling and Passivating	Approved procedure and drawings	S	S	M	X
37	Dimensional check of skid, location of lifting lugs, location of anchor bolts.	Approved procedure and drawings	S	S	M	X
38	Function, setting and calibration of instruments and controls	Approved procedure and drawings	R	R	M	X
39	Aux. Items check (spare parts, glands, cables, etc)	Approved procedure and drawings	S	S	M	
40	Name plate, tagging, marking	Approved procedure and drawings	S	S	M	
41	Final visual inspection	Approved procedure and drawings	W	H	M	
42	Controlling spare parts of equipment	Approved procedure and drawings	R	S	M	
43	Preparation for shipment	Approved procedure and drawings	H	H	M	
44	Documentation review prior to release	Approved procedure and drawings	R	R	M	X

Note 1 : According to engineering spec. for Pumps.

Note 2 : Required test shall be done for all pumps, but witness is required for one per same item.

Note 3 : Shall be done as per approved WPS/PQR.

Note 4 : This is only a indicative ITP and vendor shall prepare a detailed ITP in line with above and specific technical requirement of applicable design code.

Note 5 : Vendor shall ensure that all test and measuring instruments are duty calibrated and calibration shall be valid at the time of inspection.

Note 6 : Pump drivers shall be inspected at manufactures shop as per relevant inspection & test plan.

Note 7 : No shipment of goods may be effected unless an "Inspection relevant certificate" has been submitted to seller

2

- * - Inspector may request to witness the test.
- ** - Inspector may request to witness the execution.
- ***- Mechanical seal will not be dismantled after the test run. In case it is needed it will be discussed case by case.

Abbreviation:

P: Purchaser

O: Owner

V: Vendor

C: Certificate/Data to be provided by Vendor

W: Witness

R: Review of documents


X: Required

M: Vendor's inspection and test

H: Hold Point

S: Witness, but spot check basis

Document No.: 900-ITP-A4-RE-0001	Rev. : 0
Owner Job No.:	Type : ITP
Contract Job No.: 08-831-87-308	Page 2 OF 2

<p align="center">PROJECT: PP-PE PILOT PLANT</p>	 <p align="center">شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی</p>
<p align="center">TITLE: TECHNICAL SPECIFICATION FOR LV MOTOR</p>	

TECHNICAL SPECIFICATION FOR LV MOTOR

		<p>Document No.: 900-SPC-A4-EE-0005</p>	<p>Rev.: 00</p>
		<p>Contract Job No.:</p>	<p>Type : SPC</p>
			<p>Page : A</p>

PROJECT: PP-PE PILOT PLANT




شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: TECHNICAL SPECIFICATION FOR LV MOTOR

PAGE	REV.						PAGE	REV.						PAGE	REV.					
	0	1	2	3	4	5		0	1	2	3	4	5		0	1	2	3	4	5
A	X																			
B	X																			
1	X																			
2	X																			
3	X																			
4	X																			
5	X																			
6	X																			
7	X																			
8	X																			
9	X																			
5																				
4																				
3																				
2																				
1																				
0	2021-05-29				K.A					M.N					AA.SH				AFC	
Rev	Date				Prepared By					Checked By					Approved By				Status	

Document Revision

		Document No.: 900-SPC-A4-EE-0005	Rev.: 00
		Contract Job No.:	Type : SPC
			Page : B

PROJECT: PP-PE PILOT PLANT	 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
TITLE: TECHNICAL SPECIFICATION FOR LV MOTOR	

CONTENTS

1. GENERAL
2. DESIGN CHARACTERISTICS
3. QUALITY ASSURANCE AND PREPARATION FOR SHIPMENT

		Document No.: 900-SPC-A4-EE-0005	Rev.: 00
		Contract Job No.:	Type : SPC
			Page 1 of 9

PROJECT: PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: TECHNICAL SPECIFICATION FOR LV MOTOR

1. GENERAL

SCOPE

- 1.1.1 This specification covers the minimum requirements for design, construction, inspection and testing of industrial type low voltage, 50 Hz squirrel cage induction motors for PP&PE – PILOT PLANT of Research and Technology Center of petrochemical Co. Arak, Iran..
- 1.1.2 The scope covers motors for use in class I Divisions 1 & 2, or equivalent, in classified areas and also for general purpose industrial use in safe areas. The motors are mainly intended for centrifugal pump drives, cooling fans and compressors.
- 1.1.3 Detailed specific design requirements for each motor or group of motors are given in Data Sheets.

1.2 STANDARDS & CODES

- 1.2.1 All motors shall generally be designed, manufactured and tested in accordance with the latest edition of International Electrotechnical Commission (IEC) standard and Iranian Petroleum Standard(IPS).
- 1.2.2 Metric SI system of units shall be applied to all dimensions and relevant documents.

1.3 LANGUAGE

1. All correspondences and submittals shall be in English.

1.4 SITE CONDITIONS

The equipment and all its components shall be entirely suitable for the site conditions specified as below:

- 1.4.1 Temperature
- | | |
|---|-------|
| a) Max. ambient temperature | 44°C |
| b) Min. ambient temperature | -28°C |
| c) Design temperature for outdoor equipment | 50°C |
| d) Equipment exposed to sunlight | 83°C |
- 1.4.2 Relative humidity Max. 86% in Jan.
- 1.4.3 Altitude above sea level 1889 m
- 1.4.4 Wind velocity Max. 120 Km/h
- 1.4.5 Seismic factor In acc. With zone 3 of UBC
- 1.4.6 Special atmosphere Dusty & corrosive

		Document No.: 900-SPC-A4-EE-0005	Rev.: 00
		Contract Job No.:	Type : SPC
			Page 2 of 9

PROJECT: PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: TECHNICAL SPECIFICATION FOR LV MOTOR

1.5 DOCUMENTS PRIORITY

In the event of any conflict between this specification, the data sheets, drawings, codes and standards, the priority shall be given in the following order.

- a) Purchase order
- b) Data sheets and/or drawings
- c) This specification
- d) Codes and standards

In any case vendor shall refer the matter with purchaser and obtain clarification before proceeding with any work.

2. DESIGN CHARACTERISTICS

2.1 RATING AND APPLICATION

2.1.1 Voltage and output rating shall be:

RATING	VOLTAGE	PHASE
Below 0.25 KW	230 V	1
0.25 KW and above	400 V	3

2.1.2 Performance duty of motors shall be "S1" according to IEC 34-1, unless stated otherwise.

2.1.3 All equipment covered by this specification shall be designed for severe duty outdoors, totally unprotected from weather unless otherwise specified and for use in a corrosive atmosphere. Motor frames shall be cast iron or steel. Aluminum frames are not acceptable.


2.1.4 Motor driving compressors and reciprocating pumps shall be sized so that the product of the motor name plate rating and the motor service factor shall be at least 110% of the greatest horsepower required (including gear and etc.) for any of the compressor and reciprocating pump operating conditions.

2.1.5 Motors driving centrifugal pumps shall have horsepower rating at least equal to the following percentage of pump design point brake horsepower:

Motor Rating (KW)	Percent of Pump BHP
18.5 and less	125
22 to 55	115
75 and above	110

2.2 SUPPLY VARIATIONS

		Document No.: 900-SPC-A4-EE-0005	Rev.: 00
		Contract Job No.:	Type : SPC
			Page 3 of 9

PROJECT: PP-PE PILOT PLANT	 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
TITLE: TECHNICAL SPECIFICATION FOR LV MOTOR	

Motors shall be capable of operating continuously at their rated torque under the above conditions at any frequency between minus 2% and plus 2% of the nominal frequency together with any voltage between minus 10% and plus 10% of the nominal rating.

2.3 STARTING CONDITIONS

- 2.3.1 Unless otherwise specified, motors shall be designed for direct-on-line starting.
- 2.3.2 Motors shall be capable of two normal starts in succession under the above conditions with the motor at normal running temperature, also a minimum of 3 starts/hour, equally spaced, during normal running conditions.
- 2.3.3 Starting characteristics shall meet the requirements of IEC 34-12.
- 2.3.4 The pull up torque at nominal volts shall not be less than 0.5 times the locked rotor torque and not less than 0.5 times the rated load torque for motors rated less than 100 KW.
- 2.3.5 For motors rated 100 KW and above, the pull up torque at nominal volts shall not be less than 0.5 times the locked rotor torque and not less than 0.3 times the rated load torque.
- 2.3.6 Motors shall be able to overcome starting load inertia as well as accelerating the load to rated speed under both rated and at 20% reduced voltage conditions during starting without injurious heating.
- 2.3.7 When motors are furnished separately or with the driven equipment as a package, the torque characteristics and speed specified shall be the responsibility of the driven equipment vendor.
- 2.3.8 Unless otherwise specified, all motors are for coupled service.

2.4 ENCLOSURE

- 2.4.1 Unless otherwise specified, all motor enclosures shall be of Totally Enclosed Fan-Cooled (TEFC) construction. For outdoor use shall additionally be weatherproof without further protection and equivalent to IP 54 per IEC 34-5.
- 2.4.2 Motor enclosures shall be suitable for the area classification in which they are to be installed.
- 2.4.3 For general purpose use in class I Div.1 classified areas all motors to be explosion-proof flameproof.
- 2.4.4 For general purpose use in class I Div. 2 classified areas all motors to have type of protection "e" (increased safety) or "n" (non-sparking).
- 2.4.5 All single phase motors in classified areas shall be explosion-proof.
- 2.4.6 All motors specified suitable for classified areas shall be certified by an approved and official certifying agency/authority such as UL, FM, BASEEFA, etc.
- 2.4.7 The maximum surface temperature class in classified areas shall be as stated in the Data Sheets
- 2.4.8 Outdoor motors shall be rated for continuous operation under the direct sunlight.

		Document No.: 900-SPC-A4-EE-0005	Rev.: 00
		Contract Job No.:	Type : SPC
			Page 4 of 9

PROJECT: PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: TECHNICAL SPECIFICATION FOR LV MOTOR

2.4.9 Where specified in Data Sheets, anti-condensation space heaters for use on 230 V single phase, 50 Hz shall be provided. Terminations are to be brought-out to a cable box separate from the main power lead cable box.

2.4.10 All motors shall be provided with means for preventing the accumulation of moisture inside the motor.

2.4.11 All motors exceeding 20 kg in weight shall be equipped with suitable lifting eyes.

2.5 COOLING

2.5.1 Unless otherwise specified, method of cooling shall be totally Enclosed Fan Cooled (TEFC) and to be suitable for either direction of rotation of the motor. On motors with unidirectional fans, the direction of rotation shall be clearly and permanently marked by an arrow on the non driving end.

2.5.2 The flow direction of the external air shall be from the non-driving end.

2.5.3 Fans for motors shall be of brass, bronze or aluminium. Aluminium alloy fans shall not contain more than 0.2% copper. Fans shall be inherently balanced.

2.5.4 Plastic, fiberglass or other non-metallic fans are not acceptable.

2.6 STATOR WINDINGS

2.6.1 The motor windings shall be braced to prevent any excessive movement during transportation and all operating conditions.

2.6.2 Windings of three phase motors up to and including 75 KW shall be connected in delta. Winding of motors larger than 75 KW shall have six winding ends brought out to the terminal box for either delta or star connection.

2.6.3 Aluminum stators are not acceptable.

2.7 INSULATION AND TEMPERATURE RISE LIMITS

2.7.1 The stator windings shall be fully insulated for an unearthed system.

2.7.2 Unless otherwise specified, the insulation shall be class F according to IEC-85. The temperature rise as measured by increase in resistance method shall not exceed 80 °C for all type of motors, based on 50 °C maximum ambient shade temperature and maximum continuous rating.

2.7.3 The method of application and details of the insulating material shall be clearly stated in Vendor proposal documents.

2.7.4 All windings shall have a tropicalised finish or have an extra insulation coating (double dip and bake).

2.8 ROTOR

2.8.1 Rotors shall be free of inherent axial thrust. They shall be statically and dynamically balanced.

		Document No.: 900-SPC-A4-EE-0005	Rev.: 00
		Contract Job No.:	Type : SPC
			Page 5 of 9

PROJECT: PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: TECHNICAL SPECIFICATION FOR LV MOTOR

- a. With full driven key
or
- b. With motor half couplings keyed on the shaft.

2.8.2 Except for motors ordered as spares or replacements, supply of half couplings or pulleys will be in the responsibility of the driven machines manufacturer and shall be delivered rough or pilot bored to the motor manufacturer to finish bore, fit and balance.

2.8.3 Balancing by means of lead or other unstable material is not acceptable. If solder is used, it shall have a melting point not less than 185°C.

2.8.4 Rotor bars shall be securely located in their slots throughout their length.

2.8.5 Brazed copper or copper alloy cage construction is preferred for all rotors. However, cast aluminum rotor cages are acceptable as an alternative for all small motors with ratings up to and including 45 KW.

2.9 BEARINGS AND LUBRICATION

2.9.1 For horizontally mounted motors, preferred types of bearing and lubrication are ball and roller with grease (lithium base).

2.9.2 For vertically mounted motors, bearing type and lubrication shall generally be as in clause 2.9.1 above except for larger machines vendor should put forward alternative proven design.

2.9.3 Grease lubricated bearings shall be packed with grease before dispatch.

2.9.4 Oil lubricated ball/roller bearings shall be provided with constant level oilers.

2.9.5 Fractional horsepower motors supplied with sealed pre-lubricated ball/roller bearings shall be factory sealed, long life type and trouble free guaranteed for five years normal operation under site condition.

2.9.6 The calculated life (ISO B10 "90% survival" under the estimated bearing loads) should comply with the following requirement:

Up to 75 KW	15000 hrs.
75 KW and above	25000 hrs.

2.10 VIBRATION AND NOISE LEVELS

2.10.1 Motors at all speed should be balanced in accordance with the limits of vibration as per IEC 34-14.


2.10.2 Motor noise emission rate for the driven equipment shall not exceed the noise level specified in IEC 34-9.

2.11 SHAFT AND FRAME SIZE

2.11.1 Shafts and frames shall be designed in accordance with IEC 34-7.

2.12 CABLE CONNECTION AND TERMINATION

		Document No.: 900-SPC-A4-EE-0005	Rev.: 00
		Contract Job No.:	Type : SPC
			Page 6 of 9

PROJECT: PP-PE PILOT PLANT	 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
TITLE: TECHNICAL SPECIFICATION FOR LV MOTOR	

- 2.12.1 Terminal boxes shall be located on the left hand side of the motor when viewed from the non-drive end and shall have means for entry from any of the four directions separated by 90°, vertical or horizontal.
- 2.12.2 An earthing terminal of the same capacity as the line terminal shall be fitted externally to the terminal box. Cable boxes are to be adequately designed to withstand internal faults. It may be assumed that all 400 V motors will be protected by MCCB's.
- 2.12.3 It shall be possible in all forms of cable entry to withdraw the motor without breaking or stressing the seal or cable.
- 2.12.4 Conduit entries are to be tapped ISO. Tapped entries on all motors shall provide not less than 5 full threads.
- 2.12.5 Type and size of cables for the main supply, anti condensation heaters and P.T.C. detectors, where applicable, shall be as specified in Data Sheets. All cable boxes shall be equipped with necessary terminal blocks, cable lugs, explosion proof/weatherproof and corrosion resistant brass compression type cable glands to receive the incoming cables.
- 2.12.6 Terminal markings and phase rotation shall be "A-B-C" counter clockwise.
- 2.12.7 All cable terminal boxes shall be made of steel or cast iron. All cover joints shall be fitted with gaskets of polychloroprene or like material to prevent the ingress of moisture and dust. The enclosure shall be suitable for the area classification in which it is to be installed and its degree of protection shall not be less than IP 55 to IEC.

2.13 THERMAL PROTECTION

- 2.13.1 When specified in Data sheets single phase motors shall be fitted with an automatic reset thermal over-current device (T.O.C) in the interior of the motor.

The device shall be matched to the particular application and duty of the "drive" and to be ambient compensated for the highest temperature likely to be encountered inside the motor under site service condition. Motors thus fitted shall carry a warning plate, in English, stating that such a device is fitted and to isolate at the starter or control switch before approaching the motor.


- 2.13.2 Where specified in Data Sheets, three phase motors shall be fitted with six thermal detectors, two per phase of the positive temperature coefficient (P.T.C) type adapted to the temperature rise of the winding and wired out to a separate terminal box.

Vendor shall supply the temperature/time relationship curve with the motor test certificate.

2.14 RADIO INTERFERENCE

- 2.14.1 Where specified in data sheets, motors shall be fitted with radio interference suppression device in compliance with B.S.800.

		Document No.: 900-SPC-A4-EE-0005	Rev.: 00
		Contract Job No.:	Type : SPC
			Page 7 of 9

PROJECT: PP-PE PILOT PLANT	 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
TITLE: TECHNICAL SPECIFICATION FOR LV MOTOR	

2.15 SERIAL NUMBER AND RATING PLATES

2.15.1 The serial number shall be stamped permanently on a non-removable part of the frame.

2.15.2 Rating plates shall be stainless steel or alternatively of a non-corrosive alloy. They shall be fixed to a non-removable part of the frame and show:

- Maker's name
- Frame size and serial number
- Class of rating (continuous or short time)
- Type of protection, gas group(s), temp. class
- Class of insulation
- Type of connection (star or delta)
- Volts, phase, frequency
- Output in KW at full power at tested temperature
- Full load current and full load speed
- Efficiency and power factor at full load
- Type of enclosure (TEFC, other)
- Type and size of bearings
- Standards (IEC or other)
- Purchase order No. and year of ordering
- Locked rotor torque in % FLT
- Locked rotor current in % FLC
- Net weight
- Type of the Lubricant(Grease)
- The lubrication period and the quantity of injection lubricant in every time

2.15.3 A separate nameplate shall be fixed to the frame indicating purchaser's tag number.

2.16 FINISH

2.16.1 Prepared surfaces shall be free from rust, scale, sand, dust and grease before painting.

2.16.2 Finish shall be suitable for highly corrosive and dusty environments.

3. QUALITY ASSURANCE AND PREPARATION FOR SHIPMENT


3.1 INSPECTION

Purchaser reserves the right for inspection at any stage of manufacturing, testing or preparation for shipment. Purchaser inspection shall not relieve vendor of his commitments under the terms of purchase documents and this specification.

3.2 ITP FORMS

The inspection and test plan (ITP) forms covers the minimum verifications, checks, and tests required for LV motors to comply with codes, specification, and/or contractual requirements.

		Document No.: 900-SPC-A4-EE-0005	Rev.: 00
		Contract Job No.:	Type : SPC
			Page 8 of 9

PROJECT: PP-PE PILOT PLANT	 شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
TITLE: TECHNICAL SPECIFICATION FOR LV MOTOR	

3.3 PREPARATION FOR SHIPMENT

- 3.3.1 Unless otherwise specified, preparation for shipment shall be in accordance with the manufacturer's standard. The manufacturer shall be solely responsible for the adequacy of the preparation for shipment employed with respect to materials and applications, and provide materials to their commercial carrier systems.
- 3.3.2 Electric motors shall be shipped with bearings lubricated.
- 3.3.3 Silicagel or similar dehydrating compound shall be enclosed in each motor package. Vents shall be waterproof sealed.
- 3.3.4 Rotors shall be locked.

3.4 GUARANTEE

Unless exception is recorded by Vendor in his proposal, it shall be understood that Vendor agrees to the guarantee terms described below:

All equipments and component parts shall be guaranteed by Vendor against defective material, design and workmanship when operated under normal condition for 12 months after being placed in specified service but not exceeding 18 months after date of shipment. If any mal-performance or defects occurs during the guarantee period, Vendor shall make available repaired, altered or replacement parts free of any charges whatsoever direct on the purchaser's job site. Vendor shall make available free of charge to the purchaser qualified representatives as he deems necessary to supervise the removal, repair and replacement of the defective parts in such manner that the guarantee be maintained.

The guarantee period for repaired or replaced parts shall be 12 months after start up of repaired equipment but not more than 18 months after the repaired parts and/or equipment are shipped. The guarantee period for the remaining equipment whose operation is dependent upon the proper performance of the repaired part shall be extended by the number of days of fraction thereof that the equipment had been inoperative because of defects. Field labor charges for works during the guarantee period shall be subjected to negotiation between purchaser and Vendor.

		Document No.: 900-SPC-A4-EE-0005	Rev.: 00
		Contract Job No.:	Type : SPC
			Page 9 of 9



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPECIFICATION FOR PAINTING Doc. No. 900-SPC-A4-PD-0002

Page: A

PAGE	REV.	0	1	2	3	4	5	PAGE	REV.	0	1	2	3	4	5	PAGE	REV.	0	1	2	3	4	5
A	X																						
1	X																						
2	X																						
3	X																						
4	X																						
5	X																						
6	X																						
7	X																						
8	X																						
9	X																						
10	X																						
11	X																						
12	X																						
13	X																						
14	X																						
15	X																						
16	X																						
17	X																						

5																							
4																							
3																							
2																							
1																							
0	12 Apr. 2021	K.Asgari		M.Nazeri Nasab		AA.SH		N.Nouhjah		IFA													
Rev	Date	Prepared By			Checked By			Approved By			Approved By			Statues									
		Discipline						PEM			PM												

Document Revisions



Petrochemical Research & Technology Co.
(N.P.C-RT)

PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPECIFICATION FOR PAINTING Doc. No. 900-SPC-A4-PD-0002

Page 1 of 18

SPECIFICATION FOR PAINTING



Petrochemical Research & Technology Co.
(N.P.C-RT)

PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پتروشیمی و فناوری پتروشیمی

Title: SPECIFICATION FOR PAINTING Doc. No. **900-SPC-A4-PD-0002**

Page 2 of 18

CONTENTS

SCOPE

REFERENCE SPECIFICATION

METEOROLOGICAL CONDITIONS ON SITE

PAINT SYSTEM

QUALITY CONTROL REQUIREMENTS

GENERAL REQUIREMENTS

COLOUR

GUARANTEES



Petrochemical Research & Technology Co.
(N.P.C-RT)

PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پتروشیمی و فناوری پتروشیمی

Title: SPECIFICATION FOR PAINTING Doc. No. **900-SPC-A4-PD-0002**

Page 3 of 18

1 SCOPE

The scope of this specification is the description of the Preparation and Painting Work for Piping Equipment, Supports, Fixed Roof Tanks, Machinery, main packages (supply as loose material), etc. to be carried out for the units covered by the subject job.

2 REFERENCE SPECIFICATIONS

2.1 International Specifications

- Standard ISO 8501-1 : 1988
- European Scale of Rusting Degrees
- ASTM American Society for Testing and Material
- RAL 840 HR, RAL F2
- SSPC(Steel Structure Painting Council)

2.2 Particular Job Specification

SPC-JV-GA-E-60701

3 METEOROLOGICAL CONDITIONS ON SITE

- Temperature : Min. -28°C
: Max. $+40^{\circ}\text{C}$
- Relative Humidity : Min. 30%
: Max. 86%
- Type of environment: Industrial - Marine



4 PAINT SYSTEMS

The various applicable paint systems are the following:

4.1 Uninsulated carbon and alloy steel surfaces of Piping (pipes, fittings, flanges, valves), Supports, Equipment (vessels, exchangers, columns, etc.) and Tanks with operating temperature up to 70°C.

SYSTEM SYMBOL

22	04	F
----	----	---

PREPARATION SYMBOL

F

Blast cleaning grade Sa 2½ as per Standard ISO 8501-1:1988 or as per SSPC VIS-1 degree SP 10.

Blast cleaning profile 25÷ 30 microns

ANTI CORROSION PRIMER SYMBOL

22

1st COAT

One coat of Ethyl Silicate Zinc-Rich with solvent.

D.F.T. 75 microns

FINISH SYMBOL

04

Chlorinated

1st COAT

One coat of Pure Unsaponifiable Rubber
D.T.F. 40 microns

2nd COAT

One coat of Modified Alkyd Chlorinated Rubber
D.T.F. 40 microns

TOTAL DRY FILM THICKNESS : 155 microns

Note: Valves, Shop Fabricated Equipment primerized at Mfr's

shop, after erection and before finish coats application, shall be treated as follows:



Petrochemical Research & Technology Co.
(N.P.C-RT)

PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پتروشیمی و فناوری پتروشیمی

Title: SPECIFICATION FOR PAINTING Doc. No. 900-SPC-A4-PD-0002

Page 5 of 18

- wash-ups: The surface shall be washed with fresh water if the substrate has been contaminated with chloride, powder etc, during its transportation, storage and erection.
The surface shall be washed with unchloride solvent, where strictly necessary, to remote traces of grease, oil, etc.

- touch-ups: The surface shop primed having mechanical damages or rusting (inclusive of weld seam), shall be prepared and treated by a powerful wire brushing to the degree St3 per Standard ISO 8501-1: 1988.
The touch-ups shall then be done, using two pack epoxy zinc-rich primer in two coats, d.f.t. 30 μ m for each coat.



4.2 Uninsulated carbon and alloy steel surfaces of Piping (pipes, fittings, flanges, valves) and Equipment (vessels, exchangers, columns, etc.) with operating temperature from 71°C to 200°C.

SYSTEM SYMBOL

22 31 F

PREPARATION SYMBOL

F

Blast cleaning grade Sa 2½ as per Standard ISO 8501-1:1988 or as per SSPC VIS-1 degree SP 10.
Blast cleaning profile 25÷ 30 microns

ANTI CORROSION PRIMER SYMBOL

22

1st COAT

One coat of Ethyl Silicate Zinc-Rich with solvent.
D.F.T. 75 microns

FINISH SYMBOL

31

Paint

1st COAT

One coat of Acrylic Silicone Aluminium
D.F.T. 25 microns

Paint

2nd COAT

One coat of Acrylic Silicone Aluminium
D.F.T. 25 microns

TOTAL DRY FILM THICNESS : 125 microns

Note: Valves and Equipment primerized at Mfr's shop, after erection and before finish coats application, shall be treated as follows:



Petrochemical Research & Technology Co.
(N.P.C-RT)

PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پتروشیمی و فناوری پتروشیمی

Title: SPECIFICATION FOR PAINTING Doc. No. 900-SPC-A4-PD-0002

Page 7 of 18

- wash-ups: The surface shall be washed with fresh water if the substrate has been contaminated with chloride, powder etc, during its transportation, storage and erection.
The surface shall be washed with unchloride solvent, where strictly necessary, to remote traces of grease, oil, etc.

- touch-ups: The surface shop primed having mechanical damages or rusting (inclusive of weld seam), shall be prepared and treated by a powerful wire brushing to the degree St3 per Standard ISO 8501-1: 1988.
The touch-ups shall then be done, using two pack epoxy zinc-rich primer in two coats, d.f.t. 30 μm for each coat.



4.3 Uninsulated carbon and alloy steel surfaces of Piping (pipes, fittings, flanges, valves) and Equipment (vessels, exchangers, columns, etc.) with operating temperature from 201°C to 400°C.

SYSTEM SYMBOL

22	32	F
----	----	---

PREPARATION SYMBOL

F

Blast cleaning grade Sa 2½ as per Standard ISO 8501-1:1988 or as per SSPC VIS-1 degree SP 10.

Blast cleaning profile 25÷ 30 microns

ANTI CORROSION PRIMER SYMBOL

22

1st COAT

One coat of Ethyl Silicate Zinc-Rich with solvent.

D.F.T. 75 microns

FINISH SYMBOL

32

Paint

1st COAT

One coat of Acrylic Silicone Aluminium

D.F.T. 20 microns

Paint

2nd COAT

One coat of Acrylic Silicone Aluminium

D.F.T. 20 microns

TOTAL DRY FILM THICNESS : 115 microns

Note: Valves and Equipment primerized at Mfr's shop, after erection and before finish coats application, shall be treated as follows:



Petrochemical Research & Technology Co.
(N.P.C-RT)

PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پتروشیمی و فناوری پتروشیمی

Title: SPECIFICATION FOR PAINTING Doc. No. 900-SPC-A4-PD-0002

Page 9 of 18

- wash-ups: The surface shall be washed with fresh water if the substrate has been contaminated with chloride, powder etc, during its transportation, storage and erection.
The surface shall be washed with unchloride solvent, where strictly necessary, to remote traces of grease, oil, etc.

- touch-ups: The surface shop primed having mechanical damages or rusting (inclusive of weld seam), shall be prepared and treated by a powerful wire brushing to the degree St3 per Standard ISO 8501-1: 1988.
The touch-ups shall then be done, using ethyl silicate, zinc-rich primer, d.f.t. 50-75 μm for each coat.



4.4 Hot and cold insulated carbon and alloy steel surfaces of Piping (pipes, fittings, flanges, valves) and Equipment (vessels, exchangers, columns, etc.) with operating temperature from -25 up to 400°C.

SYSTEM SYMBOL

22	01	F
----	----	---

PREPARATION SYMBOL

F

Blast cleaning grade Sa 2½ as per Standard ISO 8501-1:1988 or as per SSPC VIS-1 degree SP 10.
Blast cleaning profile 25÷ 30 microns

ANTI CORROSION PRIMER SYMBOL

22

1st COAT

One coat of Ethyl Silicate Zinc-Rich with solvent.
D.F.T. 75 microns

FINISH SYMBOL

01

1st COAT

--

2nd COAT

--

TOTAL DRY FILM THICNESS : 75 microns

Notes: Pipes, Fittings and Flanges shall be completely painted at site (surface preparation and anticorrosive primer).

Valves and Equipment shall be completely painted at Manufacturer's shop (surface preparation and anticorrosive primer).



Petrochemical Research & Technology Co.
(N.P.C-RT)

PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پتروشیمی و فناوری ترویجی

Title: SPECIFICATION FOR PAINTING Doc. No. **900-SPC-A4-PD-0002**

Page 11 of 18

4.5 Hot and cold insulated carbon and alloy steel surfaces of Piping (pipes, fittings, flanges, valves) and Equipment (vessels, exchangers, columns, etc.) with operating temperature from 400 up to 650°C.

SYSTEM SYMBOL

22	01	F
----	----	---

PREPARATION SYMBOL

F

Blast cleaning grade Sa 2½ as per Standard ISO 8501-1:1988 or as per SSPC VIS-1 degree SP 10.
Blast cleaning profile 25÷ 30 microns

ANTI CORROSION PRIMER SYMBOL

22

1st COAT One coat of Special High Temperature Resistant Coating with solvent.
D.F.T. 75 microns

FINISH SYMBOL

01

1st COAT --

2nd COAT --

TOTAL DRY FILM THICKNESS : 75 microns

Notes: Pipes, Fittings and Flanges shall be completely painted at site (surface preparation and anticorrosive primer).

Valves and Equipment shall be completely painted at Manufacturer's shop (surface preparation and anticorrosive primer).



Petrochemical Research & Technology Co.
(N.P.C-RT)

PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پتروشیمی و فناوری پتروشیمی

Title: SPECIFICATION FOR PAINTING Doc. No. **900-SPC-A4-PD-0002**

Page 12 of 18

...

4.6 Machinery, Electrical and Instrument Items

Machinery, Electrical, Instrument and Skid mounted packages shall be completely painted (surface preparation, anticorrosive primer, finish coats) according to Manufacturer's Standard.

Manufacturer shall carry out the complete paint system in compliance with the environment where the steel surfaces will work and shall issue the necessary recommendations for retouching, repairing and renewal of the shop painted surfaces.



5 QUALITY CONTROL REQUIREMENTS

The following inspections and testings shall be performed during and on completion of application of the paint system:

- Visual examination of surface preparation in accordance with Standard ISO 8501-1:1988
- Check of blast cleaning profile using a suitable profile meter
- Check of paints documentation
- Check of expiry dates of the priming and finishing coats
- Check of meteorological and environmental conditions
- Visual examination of appearance and uniformity of the painted surface
- Check of top coating and drying time, in accordance with the directions of the paint Manufacturer
- Check of paint drying and polymerization
- Check of dry film thickness by suitable non-destructive instruments such as "MIKROTEST, DIAMETER" or equivalent
- Check of adhesion (on the finishing) according ASTM-D-3359.
Degrees lower than 3A and/or 3B are not accepted.

If, during the above mentioned inspections, painting defects (such as dripping, blistering, mudcracking, over thickness and dry spay) or conditions of preparation, thickness, etc. not conform to the requirements would be ascertained, the Applicator shall, at his own care and expense, bring back the faulty surfaces to the acceptability degree.

-Workshop and field quality control plan for painting shall be performed in compliance with SPC N. JV-ZA-E-09623



6 GENERAL REQUIREMENTS

- The abrasive to be used shall be chloride-free siliceous sand (marine sand excluded) or metal grit.
- Blast cleaning and painting shall not be carried out on wet surfaces.
- No acid washes or other cleaning solutions or solvents shall be used on metal surfaces after they have been blast cleaned.
- The surface preparation of all steel surfaces to be coated shall be free of mill scale, rust corrosion product, oxides, paint, oil or other foreign matter.
- Only dry blast cleaning procedures shall be allowed. The compressed air used for blasting shall be free of detrimental amount of water and oil.
- The primer shall be applied immediately after the completion of the blast cleaning.
- Before applying the paint, the fitness of the preparation of the surfaces to be painted shall be ascertained.
- The painting work shall be carried out carefully, by suitable labour.
- Application of painting system (number of coats, thickness, etc.) shall be in accordance with this specification.
- Each coat of paint shall be of a different colour, so as to produce a contrast which will ensure through covering of the next coat.
- Paints, either supplied already mixed (one component) or with the components in separate containers (two components) shall be properly mixed before use so as to make them homogeneous and consistent.
- No thinner shall be added to the paints, unless specifically approved by the Paint Manufacturer. In such a case, the type of thinner used and its amount shall be in accordance with the Paint Manufacturer's recommendations.



- The thinner shall be added during the process of mixing and homogenizing of the paints.
- Paints shall be stored in well-ventilated rooms, far away from heat sources, open flames, sparks, and protected from sun rays.
- The system symbols shown in this specification are codes for computer purpose only.
- Insulated stainless steel piping and equipment will not be painted.
- Uninsulated stainless steel and hot dip galvanized surfaces shall not be painted.
- Touch-ups on welded areas of hot dip galvanized surfaces shall be treated as follow:

-surface preparation:

Remove oil,grease and any other foreign material from surface by wash with a suitable chlorine-free solvent,in accordance to SSPC-SP1 standard,on all complete galvanized areas near welding damaged surfaces.

Hand or power tool cleaning for welded surfaces where hot dip galvanized surfaces is damaged,in accordance to SSPC-SP2 standard,in order to remove all welding slags.

-paint application:

A single coat of two-pack epoxy surface tolerant mastic,CARBOLINE 15 type or equivalent,with a thickness of 125 microm (DFT) applied on prepared dry surface including a suitable lateral overlapping on galvanized areas of about 50 mm on each side.



7 COLOURS

The colours for the top coats listed below shall be in accordance with RAL 840 HR, RAL F2 code.

- Surface of uninsulated piping and equipment with an operating temperature up to 70°C (Firefighting excluded)	GRAY	RAL-7035
- Surface of uninsulated piping and equipment with an operating temperature over 70°C	ALUMINIUM	RAL-9006
- Piping and Equipment for firefighting purpose	RED	RAL-3002
- Pipe supports	GREEN	RAL-6002
- Tanks	WHITE	RAL-9010
- Uninsulated Machinery with operating temperature up to 70°C	GRAY	RAL-7035
- Uninsulated Machinery with operating temperature over 70°C	ALUMINIUM	RAL-9006
- Motors	BLUE	RAL-5012
- Baseplates	BLACK	RAL-9005
- Electrical Motors and Alternators	BLUE	RAL-5012
- Transformers	GRAY	RAL-7035
- Switchboards and Electric Control Panels	GRAY	RAL-7035
- Electrical and Instrument bulk material	Manufacturer's Std.	



Petrochemical Research & Technology Co.
(N.P.C-RT)

PP-PE PILOT PLANT



شرکت ملی صنایع پتروشیمی
شرکت پتروشیمی و فناوری پتروشیمی

Title: SPECIFICATION FOR PAINTING Doc. No. 900-SPC-A4-PD-0002

Page 17 of 18

8 guarantees

8.1 The Applicator shall assure that the surface preparation and application of the painting products shall be carried out according to this specification.

8.2 The guarantee period shall last as indicated in the specification.

During the guarantee period the rusting degrees, according to the European Scale of Rusting Degrees, shall not exceed the value indicated here under:

after 12 months	Re1
after 24 months	Re2

All the other defects such as "blistering", peeling, etc. even without the presence of rust, are not admitted during the period of guarantee as they can give rise to corrosion, adherence defects, film degrading.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: Engineering Specification for Site Conditions

Page: A

PAGE	REV.	0	1	2	3	4	5	PAGE	REV.	0	1	2	3	4	5	PAGE	REV.	0	1	2	3	4	5
A	X																						
1	X																						
2	X																						
3	X																						
4	X																						
5	X																						
6	X																						
7	X																						
8	X																						
5																							
4																							
3																							
2																							
1																							
0	12 Apr. 2021	M.Asgari	M.Nazeri Nasab	M.Asadi	N.Nouhjah	IFA																	
Rev	Date	Prepared By	Checked By	Approved By	Approved By	Statues																	
		Discipline			PEM	PM																	

Document Revisions



National Petrochemical Company
Petrochemical Research & Technology

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: Engineering Specification for Site Conditions

Page: 1

Engineering Specification for Site Conditions



National Petrochemical Company
Petrochemical Research & Technology

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: Engineering Specification for Site Conditions

Page: 2

1 GENERAL

2 DEFINITIONS/ABBREVEATIONS

3 LOCATION

4 SITE CONDITION

4.1 Temperature

4.2 Humidity

4.3 Barometric Pressure

4.4 Rainfall

4.5 Snow

4.6 Wind

4.7 Design data for Air Conditioning

4.7.1 Summer

4.7.2 Winter

4.7.3 Fresh Air changes

4.7.4 Pressurization

4.8 Earth Quake

4.9 Others

5 SPECIFICATION OF UTILITIES



6 ELECTRICAL POWER SPECIFICATIONS



National Petrochemical Company
Petrochemical Research & Technology

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: Engineering Specification for Site Conditions

Page: 3

1. GENERAL

This engineering specification covers general information regarding site data and climatic conditions. The equipment supplied must be able to withstand the ambient conditions as described below for transport, storage and operation of the plant.

2. DEFINITIONS/ABBREVEATIONS

OWNER	Petrochemical Research & Technology Company
VENDOR	Companies Awarded by Owner for Procurement Services, Inspection Affairs or Transportation, Providing of Project's goods, following up all transport activities from VENDOR workshop to final destination as defined in the purchase order.
EQUIPMENT	Means any equipment, material and components to be permanently installed in the PLANT and special tools, test equipment and erection-, pre-commissioning-, commissioning-, start-up-, two years- and capital-spare-parts
CONTRACT	Means contract between OWNER and VENDOR
PURCHASE ORDER	Means document of commitment between Owner and VENDOR for the supply of EQUIPMENT
PLANT	Means the area within battery limits
SITE	Means the area NPC-RT, ARAK/IRAN

3. LOCATION

The town of Arak is situated about 300 km south-west of Tehran/Iran.
The site for NPC-RT Complex is located 22 km South-west of Arak.

4. SITE CONDITION

Materials shall be protected against corrosion during transit as necessary, when required, materials shall be painted or Coated in accordance with Particulars Contained in the purchase order and/or specification.



4.1 Temperature

- Ambient Temperature
 - Highest maximum on record 44°C
 - Lowest minimum on record -28°C

- Design temperature
 - Process design dry bulb Max. 40°C
Min. -16°C
 - Process design wet bulb 21°C
 - Mechanical design of equipment, steel structures, civil works, Max. 44°C
Min. -28
 - Design temperature for outdoor electrical and instrument equipment 50°C
 - Design temperature for air coolers 40°C
 - Winterizing -21°C
 - Design temperature for equipment exposed to sunlight 83°C
 - Soil temperature for cable sizing 30°C
 - Design temperature for electrical equipment in substations 45°C
 - Design temperature for chillers and condensing unit refrigeration 40°C

4.2 Humidity

- relative in January Max. 86%

4.3 Barometric Pressure

- Min. / Max. 802 / 818 millibars
- Average 810 millibars

4.4 Rainfall

- Design Max. 80 mm (24 hours)
Max.40mm (1 hour)
- Sewer design 40 mm/h

Rainy season months are November through April.



4.5 Snow

- Snow load 175 kg/m^2

4.6 Wind

- Prevailing wind direction West-East
- Wind velocity at 10 m above grade 120 km/h max .
- Wind loads as per UBC 1985 edition chapter 23 vol. 1.

Wind force "H"–The wind force shall be computed as the product of the design wind pressure "P", the project area of the windward face "A", the appropriate shape factor "C", and the standard projected area increase factor "I".

Thus $H = PACI$

Where H = Wind Force (kg)

P = Design Wind Pressure (kg/m^2) (see table 2.1)

A = Projected Area of the Windward Face (m^2)

C = Shape Factor (see table 2.2)

I = Project Area Increase Factor (see table 2.2)

Table 2.1 - Design Wind Pressure "p"

Height Zone (M.)	"p" Kg/m^2
0-10	100
10-20	120
20-30	133
30&up	150

Table 2.2-Factor "I"

Surface	Typical use	C	I
Cylindrical	Process vessels		
24" thru. 30" Dia.		0.6	1.50
36" thru. 48" Dia.		0.6	1.37
54" thru. 72" Dia.		0.6	1.28
78" thru. 96" Dia.		0.6	1.20
102" and up		0.6	1.18
Spherical	Storage vessels (any diameter)	0.6	1.1
Flat	Closed structure	1.0	1.0
Steel or concrete open structure: Wind normal to one of the sides Wind acting on corners:		2.2	1.0



- 3 cornered structures	2.2	1.0
- 4 cornered structures	2.4	1.0
- Individual elements: Cylindrical sections with diameter equal to or less than 2 inches	0.8	1.0
Flat or angular section	1.3	1.0

4.7 Design data for Air Conditioning

4.7.1 Summer

- Technical offices and control rooms
 - Indoor required temp. (dry bulb) 25 °C ± 1°C
 - Relative humidity 50% ± 5%
- Electrical Substations
 - Indoor required temp. (dry bulb) 35 °C ± 1°C
 - Relative humidity 50% ± 10%
- Outdoor temperature (dry / wet bulb) 37/21°C

4.7.2 Winter

- Technical Offices and control Rooms
 - Indoor required temp. (dry bulb) 22 °C ± 1 °C
 - Relative humidity 45% ± 5%
- Electrical Substations
 - Indoor required temp. (dry bulb) 2 °C min.
- Outdoor temperature -16 °C



4.7.3 Fresh Air Changes

- Minimum for air conditioning system 25 m³/h person
- Sanitary rooms 37 m³/h m² surface
- Battery rooms 15 cph
- Kitchens 15 cph
- Toilets 20 cph



National Petrochemical Company
Petrochemical Research & Technology

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: Engineering Specification for Site Conditions

Page: 7

4.7.4 Pressurization

- Technical offices, control rooms
electrical substation 5 mm w.g.
- Closed warehouses 2 mm w.g.
- Cold storage warehouses 3 mm w.g.

4.8 Earth Quake

Seismic factor in accordance with zone 3 of UBC , latest edition.

4.9 Others

- Frost line : 1.0 m below grade level
- Water table : Approx. 15 m below grade level
- Thunder and lighting : To be considered
- Sand storm : To be considered
- Altitude above sea level : 1888.48 m
- Ground resistivity : 400 Ohm.m

5 SPECIFICATION OF UTILITIES

Run- off coefficients shall be as follows:

- Buildings and shelter roof 1.00
- Asphalt roads and yards concrete paved areas 0.85
- Macadamized roadways 0.40
- Unpaved areas 0.20

Unless otherwise deduced from soil report.



National Petrochemical Company
Petrochemical Research & Technology

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: Engineering Specification for Site Conditions

Page: 8

6 ELECTRICAL POWER SPECIFICATIONS

* Circuit Voltage

- A. C. control circuit

Voltage : 400 Volt

Frequency: 50Hz

Phase: 3-phase single-phase

Wire: 3-wire 2-wire

*Instrument circuit

A.C.

Voltage: 110 Volt


Frequency: 50Hz

Phase: 3-phase single-phase

Wire: 3-wire 2-wire

D.C.

Voltage: 24 Volt

PROJECT: PP-PE PILOT PLANT	Client:  شرکت ملی صنایع پتروشیمی شرکت پژوهش و فناوری پتروشیمی
TITLE: UTILITY CONDITION	
<h1>UTILITY CONDITION</h1>	
Document No.: 900-SPC-A4-PR-0006	Rev.: 00
Owner Job No.:	Type: SPC
Contract Job No.:	Page A

PROJECT: PP-PE PILOT PLANT

Client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: UTILITY CONDITION

REV. PAGE	0	1	2	3	4	REV. PAGE	0	1	2	3	4
A	x										
B	x										
1	x										
2	x										
3	x										
4	x										

4					
3					
2					
1					
0	11/9/2021	K.A	M.N	M.A	IFA
Revision	Date	Prepared By	Checked By	Approved By	Status

Document revision

Document No.: 900-SPC-A4-PR-0006	Rev.: 00
Owner Job No.:	Type: SPC
Contract Job No.:	Page B

PROJECT: PP-PE PILOT PLANT

Client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: UTILITY CONDITION

Nitrogen Specification

Supply conditions at Pilot Plant Battery Limit (B.L.)

	Licensor requirements		Guaranted
Purity			%mol N ₂
Oxygen	10	ppm. vol. max	10
Water	20	ppm. vol. max	5
Dew Point			°C

High Pressure

	Max.	Nor.	Min.
Pressure (barg):			
Temperature (°C):			

Mechanical design conditions:

Pressure (barg):	
Temperature (°C):	

Bottle: 150/180 bar

Medium Pressure

NIT

	Max.	Nor.	Min.
Pressure (barg):	7	6.1	4
Temperature (°C):	Amb	Amb	Amb

Mechanical design conditions:

Pressure (barg):	8
Temperature (°C):	-30/+100

Low Pressure

NIL

	Max.	Nor.	Min.
Pressure (barg):	4	3.5	
Temperature (°C):	Amb	Amb	

Mechanical design conditions:

Pressure (barg):	5
Temperature (°C):	100

Document No.: 900-SPC-A4-PR-0006

Rev :00

Owner Job No.:

Type : SPC

Contract Job No.:

Page 1 of 4

PROJECT: PP-PE PILOT PLANT

Client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: UTILITY CONDITION

Air Specification

Supply conditions at Pilot Plant Battery Limit (B.L.)

	Licensor requirements	Guaranted
Oil	free	free
Dust	free	free
Dew point (°C)		- 40 °C

Instrument air

INA

	Max.	Nor.	Min.
Pressure (barg):	8.5	6.6	4.5
Temperature (°C):	Amb.	Amb.	Amb.

Mechanical design conditions:

Pressure (barg):	10/35
Temperature (°C):	100

Plant Air or Utility Air

UTA

	Max.	Nor.	Min.
Pressure (barg):	9.5	6.8	
Temperature (°C):	Amb.	Amb.	

Mechanical design conditions:

Pressure (barg):	10
Temperature (°C):	100

Document No.: 900-SPC-A4-PR-0006

Rev : 00

Owner Job No.:

Type : SPC

Contract Job No.:

Page 2 of 4

PROJECT: PP-PE PILOT PLANT

Client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: UTILITY CONDITION

Steam Specification

Header conditions at Pilot Plant Battery Limit (B.L.):

High Pressure NOT AVAILABLE

	Max.	Nor.	Min.
Pressure (barg):			
Temperature (°C):			

Mechanical design conditions:

Pressure (barg):	
Temperature (°C):	

Medium Pressure **MPS**

	Max.	Nor.	Min.
Pressure (barg):	25	20	18
Temperature (°C)	sat.+ 30		sat.
Calculated Temp. (°C)	226 - 256	220 - 250	210 - 240

min. = sat.

max. = sat. + 30°C

Mechanical design conditions:

Pressure (barg):	30
Temperature (°C):	256

Low Pressure (LPS) **LPS**

	Max.	Nor.	Min.
Pressure (barg):	6.5	5.5	5
Temperature (°C):	180	162	sat.

Mechanical design conditions:

Pressure (barg):	10
Temperature (°C):	185

Document No.: 900-SPC-A4-PR-0006

Rev : 00

Owner Job No.:

Type : SPC

Contract Job No.:

Page 3 of 4

PROJECT: PP-PE PILOT PLANT

Client:



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

TITLE: UTILITY CONDITION

Water Specification

Cooling Water (CW) CWS/CWR

(1) Specification: suitably treated to inhibit biological growth, corrosion and scaling

(2) Supply and return conditions at Pilot Plant Battery Limit (B.L.):

	Pressure (barg)	Temperature (°C)
Supply:	6 / 5.5 / 2.5 max/nor/min	27 max
Return:	2.5 norm	37 max

(3) Mechanical design conditions:

Pressure (barg)	10
Temperature (°C)	185

Industrial Water IWA

(1) Specification: filtered water suitable for process

(2) Supply conditions at Pilot Plant Battery Limit (B.L.)

Pressure (barg)	5	max
Temperature (°C)	Amb.	max

(3) Mechanical design conditions:

Pressure (barg):	6
Temperature (°C):	100

Demineralized Water DWA

(1) Supply conditions at Pilot Plant Battery Limit (B.L.)

Pressure (barg)	8	max
Temperature (°C)	70	max

(2) Mechanical design conditions:

Pressure (barg):	10
Temperature (°C):	185

Document No.: 900-SPC-A4-PR-0006

Rev : 00

Owner Job No.:

Type : SPC

Contract Job No.:

Page 4 of 4



CONTENTS

1. Purpose
2. Definition
3. Content
4. Instructions concerning vendor's data books presentation
 - 4.1 Language / units
 - 4.2 Size of documents
 - 4.3 Class of documents
 - 4.4 Books form
 - 4.5 Identification
 - 4.6 Internal presentation
 - 4.7 Vendor documents numbering
5. Number of vendor's data books per purchase order
6. Delivery time
7. Transmittal of documentation
8. Documents for engineering
 - 8.1 Vendor drawing and documentation list
 - 8.2 Plate arrangement drawing and material list
 - 8.3 General arrangements drawing
 - 8.4 Detail drawings
 - 8.5 Calculation notes
 - 8.6 Spare parts list
9. Description of inspection and / or acceptance documents
 - 9.1 Material certificates
 - 9.2 Welders qualification
 - 9.3 Hydraulic test report
10. Issuance schedule



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: INSTRUCTION FOR VENDOR DOCUMENTATION

Page: 2

1. Purpose

The purpose of this procedure is to give instructions for preparation of Vendor's data book (mechanical catalogue) applicable to the contract.

2. Definition

VENDOR Companies Awarded by Owner for Procurement Services, Inspection Affairs or Transportation, Providing of Project's goods, following up all transport activities from VENDOR workshop to final destination as defined in the purchase order.

OWNER: Petrochemical Research & Technology Company

3. Content

The Vendor's Data Book shall contain comprehensive detailed information covering design and engineering, inspection and testing, installation, operation and maintenance manual of the equipment and accessories included in, and supplied for the plant.

In addition, VENDOR shall submit the drawings and documents according to the "LIST OF DOCUMENTS REQUIRED FROM VENDOR" given in the requisition / purchase order.

For a sample of the contents of VENDOR's data book refer to Attachment No. 1.

4. **Instructions Concerning Vendor's Data Books Presentation**

4.1 **Language / Units**

All documents and drawings for design and fabrication shall be written in English as well as all Maintenance and Operating Instructions.

All units and dimensions shall be in the metric system except for the following:

- Size of pipe and valve (Inch)
- Flange rating (Pound)

If necessary, other units and dimensions shall be used with OWNER approval.



4.2 Size Of Documents

- All drawings shall be prepared on ISO standard size sheets, i.e.
 - A0 : 840 x 1188 mm
 - A1 : 594 x 840 mm
 - A2 : 420 x 594 mm
 - A3 : 297 x 420 mm
 - A4 : 210 x 297 mm
- Size A0 should be used only with OWNER approval. Larger sizes are not allowed.
- In general all drawings shall be reduced to 297 mm x random length size for convenience in handling.
- All documents other than drawings shall be prepared on standard A3 or A4 size sheets suitable for insertion in an A4 hard-core binder.
- All reduced drawings, data, etc. shall be legible.

4.3 Class Of Documents

All drawings / data submitted must be of good quality that will allow production of legible copies.

- Documents submitted to OWNER for comments:
These documents give all data necessary to understand operation and to appraise the construction method, assembly, disassembly, fastening and connections of equipment. They clearly indicate the scope of supply and specify all details necessary for installation.
- Final documents:
These documents are certified, "As built" documents finally reviewed without comment by OWNER.
OWNER comments on VENDOR documentation shall in no way relieve the VENDOR of his responsibility especially concerning the design of the equipment or facilities.

4.4 Books Form

All the documentation shall be inserted in A4 (297 mm x 210 mm) white color binder (Punch holes shall be two).

Other types, such as folders or boxes with loose sheets, are not acceptable. The thickness of each volume shall under no circumstance exceed that of a normal file (7 cm). The paper level inside each file shall be at least 5 mm below the opening point of the binder.



Drawings and documents with sizes larger than A3 will be folded in plastic jackets inserted in the file, with opening upward.

4.5 Identification

Each Vendor's data book shall be identified on its back and on the cover by a standard label, the format of which is given in Attachment No.2.

4.6 Internal Presentation

All drawings and documents shall be written in English.
Cardboard division sheets shall separate different groups of documents, sheets and directions. At least rigid index sheets with numbering shall separate the different chapters.

The wording and presentation of the reports will be controlled with utmost care.


Consequently, any loose presentation, which may give the OWNER impression of careless work, will be rejected. This applies in particular to:

- All manuscripts or type texts with handwritten comments (except for technical documents on OWNER or Vendor's standard forms).
- All texts in any language other than English, unless they are transmitted together with a translation in compliance with the above requirement.
- All copies that might be questionable: writing too light, dark background areas, dark edge due to poor centering, titled copy, perforation marks, etc.

4.7. Vendor Document Numbering

In addition to the Vendor's document number, VENDOR shall add OWNER's document number.

The block shown here below will be placed on each "first page" of specification, data sheet and each drawing in addition to the Vendor's label.

 National Petrochemical Company / Petrochemical Research & Technology Company PP-PE Pilot Plant				
NPC-RT PP-PE Pilot Plant	Owner Project No.	Rev.	Date	Signature
	Owner Doc/Dwg. No.			
	Sh. Of			



All other pages of the specifications and data sheets shall have the following block.

Project No.	Owner Project No.	Rev. Sh. Of
OWNER DOC. No.		

5. Number Of Vendor's Data Books Per Purchase Order

If the purchase order includes several separate requisitions or covers several items, which are to be shipped with different vessels, the VENDOR shall supply as many separate Vendor's data books, as there are separate requisitions and/or shipments.

If the requisition covers a large number of items, a common part and specific chapters by item may be planned in agreement with OWNER.

VENDOR shall prepare:

- 10 Copies of the complete VENDOR Data Book.
- Copy of electronic file in CD
- 2 Reproducible copy of final drawings / documents

6. Delivery Time

Documents submitted for review are forwarded in compliance with the dates specified on the Attachment # 2 of requisition.

Final documents shall be forwarded 15 days after receipt of documents commented by OWNER.

Delivery dates are mandatory and a payment installment may be conditioned by the receipt of documents and/or drawings (refer to the order provisions).

7. Transmittal Of Documentation

All drawings and documents shall be transmitted with a transmittal note to the address indicated in the Purchase contract. Purchase order number should be clearly indicated.

Any drawing, which is unreadable, will be returned without fail to the VENDOR who shall in no case use this as an excuse for delivery delay.

Any revision made on documentation should be highlighted with a cloud mark.



8. Documents For Engineering

This paragraph is to clarify OWNER requirements concerning the presentation of some essential engineering documents and drawings submitted for approval. The items indicated below refer to the items listed in the “LIST OF DOCUMENTS REQUIRED FROM THE VENDOR” shown in the attachment # 2 of requisition.

8.1 Vendor Drawing And Documentation List

The VENDOR'S shall provide an exhaustive list of the documentation to be delivered. It should be sent together with the first issue of documents.

8.2 Plate Arrangement Drawing And Material List

This drawing shall be in proper scale.

The plate arrangement drawing or sketch shall indicated as a minimum:

- A general outline of the equipment (shells, heads, supports, skirt, lugs, saddles, stiffeners,etc.) ;
- For columns, shell / cone / skirt development including all internal & external attachments;
- Position of circumferential and longitudinal weld seams in accordance with plates sizes;
- Head shape (and plate arrangement in case of composed head);
- Shape of reduction cone (straight flange, knuckle radius, etc.) ;
- Plate thickness after plate forming;
- Material specification;
- Material list

Approval of this document enables order of main materials to be finalized.

The material list for nozzles shall be presented in schedule form. It shall be established from the nozzles list shown on the engineering arrangement drawing or process data sheet, and shall include:

- Identification (or item), quantity and diameter of nozzles;
- Type, rating, facing and material of flanges;
- Schedule or thickness of nozzle necks;
- Diameter, thickness and material of reinforcements;
- Material, thickness, rating of blind flanges (if any);
- Diameter, quantity, length, thread type, material of stud bolts and nuts;
- Definition, rating, materials of gaskets



This document is prepared from information known when equipment is ordered. Its approval will allow the above accessories to be supplied.

Any modifications of one of the items listed above will involve revision of the documents and be followed by new approval.

After approval, the material list shall be transferred on the VENDOR general arrangement drawing.

Note: these documents do not apply to storage tanks.

8.3 Item: General Arrangement Drawing

The VENDOR can start fabrication only after receiving OWNER approval of this document as a minimum.

This drawing shall be in proper scale.

This drawing shall give the following technical information:

- Main dimensions, overall length, minimum thickness of major components;
- Design code, design pressure and temperature, hydrostatic test pressure, non-destructive tests, heat treatment, etc.;
- Corresponding material specification;
- Location and orientation of weld seams (shells, heads, skirt, etc.);
- Shape of heads or, type/ angle of roof for storage tanks;
- Location, orientation of nozzle gussets and other external welded Attachments;
- Location & orientation of internals (trays supports, coils, demisters, baffles, etc.);
- List of nozzles and connections in accordance with material list (dia., type, rating, schedule, etc.);
- Gaskets and bolting (type, material, etc.);
- All information of scope of supply;
- All information on anchoring system;
- Fabricated weight;
- Empty weight;
- Hydro test weight;
- Operating weight;
- Net weight of removable parts;
- Type of paint and its surface preparation;
- North direction;
- List of detail drawings;
- Insulation / fire proofing support detail;

Note: OWNER guide drawings shall not be used as construction drawings.



8.4 Detail Drawings

These drawings shall include references to general arrangement drawing and show:

- Detail of all accessories, internal and external attachment (gussets, etc.): With weld geometry and specification in accordance with approved welding procedure;
- Weight and dimension of removable internals;
- Part list of the various elements;
- Weld geometry and specification in accordance with approved welding procedure;
- All information required on manufacturer name plate;
- Insulation / Fire proofing support detail;
- All construction details not covered above;

All this information may be shown on general arrangement drawing, at Vendor's choice.

8.5 Calculation Notes

Calculation notes shall be in accordance with general arrangement drawing. VENDOR shall establish calculation notes for each equipment. They shall in all cases be included in "manufacturer file".

These documents shall be clearly marked with identification numbers as other VENDOR documents.

They shall include full reference to information sources (codes, formulas, etc.) used for design.

These documents shall be transmitted for review / approval to OWNER. These documents shall be approved prior to general arrangement drawing approval. OWNER approval shall in no case relieve the VENDOR from his responsibilities.

8.6 Spare Parts List

SPARE PARTS LIST AND INTERCHANGEABILITY RECORD (SPIR form) to be filled out by VENDOR according to its filling procedure.

9. Description Of Inspection And/Or Acceptance Documents

This paragraph clarifies OWNER requirements for documents relating to inspection and acceptance of equipment.

The items indicated below refer to the items listed in the "LIST OF DOCUMENTS REQUIRED FROM THE VENDOR" included in the requisition.



9.1 Material Certificates

All pressurized parts shall be considered as main components requiring certificates type 3

.1. B including:

- Shell, heads, cones
- Skirt, saddles, support brackets
- Tubes, flanges, forging, internal piping, nozzle necks
- Bolting for nozzle and shell flanges
- Welding material

9.2 Welders Qualification

This document shall contain all the information concerning:

- Welders (name, number, mark)
- Welding procedure
- Base material (specification, thickness, etc.)
- Welding material (specification, diameter, etc.)
- Electrode type
- Destructive tests results (bending, tensile, impact tests)

All information required on the QW 484 forms given by ASME section IX shall be considered as a minimum.

9.3 Hydraulic Test Report

This document shall contain the following information:

- Type and volume of equipment
- Contained gas analysis
- Description of equipment (length, width or diameter, nature of base material, thickness)
- Construction number and date
- Hydrostatic test pressure in letters
- Date of inspection (before test) and inspector's name
- Hydrostatic test data
- Signatures of inspectors

10. Issuance Schedule

Final Vendor's data books should normally be shipped to the OWNER as per agreed delivery schedule specified in PO of the relevant equipment.

Such final Vendor's data books shall be an integral part of the Vendor's services set forth in the purchase order and the following precautions must be taken in order to meet the above shipping requirements:



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: INSTRUCTION FOR VENDOR DOCUMENTATION

Page: 10

At the latest 2 months before the scheduled delivery date, the VENDOR shall transmit the Vendor's data book model to OWNER for comments and approval.

The model shall be in conformity with the final internal and external presentation and shall contain all documents required for the final report.

A non- completed form will replace the final acceptance documents, which do not exist at that stage.

Note: Recommendation for handling, transport and storage shall be shipped in box together with the equipment.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: INSTRUCTION FOR VENDOR DOCUMENTATION

Page: 11

ATTACHMENT # 1

VENDOR DATA BOOK'S CONTENT (SAMPLE)



PART 1 : General Descripton Of The Equipment

- 1.1. OWNER's requisition
- 1.2. General description including OWNER's specifications and data sheets and drawings

PART 2 : Recommendations For Storage, Handling And Lifting

- 2.1. Special precautions for handling prior erection (1)
- 2.2. Recommendations for storage prior and during erection

PART 3: Erection

- 3.1. List of components to be erected/installed on site
- 3.2. Detailed schedule of the erection including hypothesis taken into account
- 3.3. Procedures for erection and installation of the equipment
- 3.4. Schedule of connection points detailing locations and dimensions
- 3.5. Electrical terminal wiring diagrams
- 3.6. Details of site assembly, and filed welds
- 3.7. List of special tools for site erection and assembly
- 3.8. Procedures for site assembly, leveling and welding
- 3.9. Welding specifications for field welds
- 3.10. List of checks and tests to be performed on site
- 3.11. Site testing and acceptance procedures
- 3.12. Procedures for preparation of the equipment for commissioning (including the calibration of instruments)
- 3.13. List of works to be implemented on site instead of Vendor's shop (When required)
- 3.14. Weight (empty, full of water)

PART 4 : Start-Up Running Instructions

- 4.1. General
- 4.2. Principle
- 4.3. Operation
- 4.4. Description of the apparatus
- 4.5. Commissioning
- 4.6. Running instructions



PART 5 : Maintenance Instructions

- 5.1. Maintenance
- 5.2. Safety instructions
- 5.3. General maintenance
- 5.4. Lubricant table and equivalence
- 5.5. Trouble shooting check lists and diagrams
- 5.6. Maintenance Schedule

PART 6: Spare Parts (2), (6)

- 6.1. Spare parts for erection, precommissioning, commissioning and start-up
- 6.2. Spare parts for 2 years operation
- 6.3. Sectional drawings

PART 7: Manufacturer's Documents / Drawings (3)

- 7.1. List of drawings (4)
- 7.2. Manufacturer's data report
- 7.3. Drawings (5)
- 7.4. Calculation notes
- 7.5. Curves and technical data (including P.W.H.T. if applicable)
- 7.6. MANUFACTURER name plate photography

PART 8: Quality Assurance And Manufacturing Documents

- 8.1. Material test certificates
- 8.2. Welding Inspection controls and test reports
- 8.3. Welding procedure specification
- 8.4. Welding procedure qualification reports
- 8.5. Welder qualification reports
- 8.6. Weld identification
- 8.7. Plate identification sketch with heat numbers
- 8.8. Certificate of shop inspection (before hydrostatic test)
- 8.9. X-Ray identification
- 8.10. Radiographic procedure qualification
- 8.11. Radiographic reports along with radiographs
- 8.12. Batch test certificates from manufactures for electrodes
- 8.13. Hydrostatic and other test results and reports (such as visual control and N.D.T., etc.).
- 8.14. Precommissioning / commissioning check Lists & procedures
- 8.15. All other requirements as specified in the respective specifications



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: INSTRUCTION FOR VENDOR DOCUMENTATION

Page: 14

Remarks

- (1) Including a copy of transportation drawing
- (2) No spare parts price must be incorporated in this book
- (3) Only issues approved by as “FINAL”
- (4) Only the drawings included in this part 7.
- (5) Drawings larger than A3 format must be folded and inserted in individual plastic skirts.
- (6) Sufficient information to be prepared for spare parts Such as: materials of construction sizes / three proposed Vendor's, etc.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: INSTRUCTION FOR VENDOR DOCUMENTATION

Page: 15

ATTACHMENT # 2


VENDOR'S DATA BOOK

COVER




Attachment #8 Instruction for making Data CD

• CD Title CASE

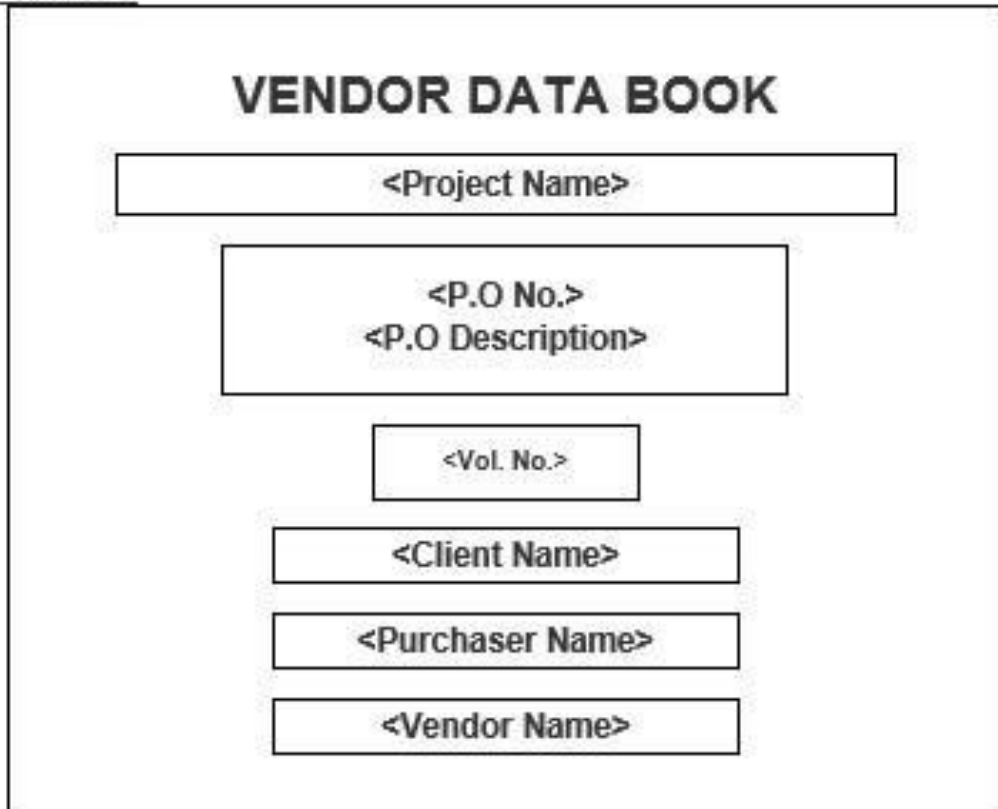

• Construction of the Data Folder

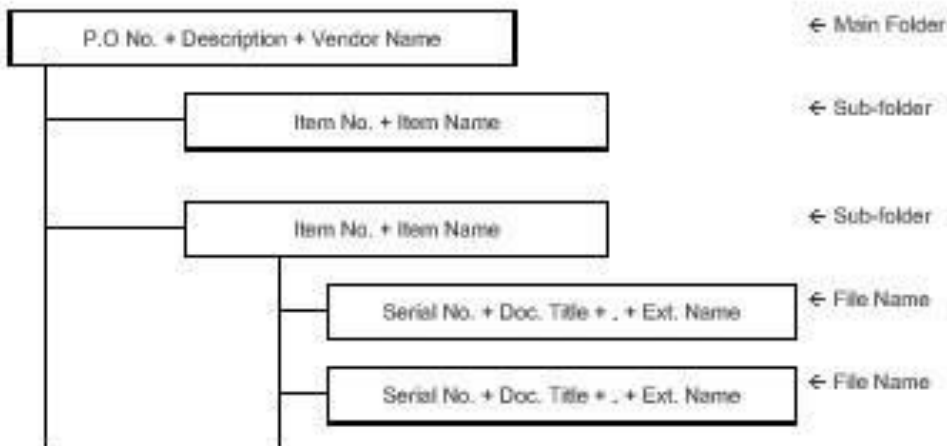

Title: PACKING AND MARKING PROCEDURE

Page: A

REV. PAGE	0	1	2	3	4	5	REV. PAGE	0	1	2	3	4	5	REV. PAGE	0	1	2	3	4	5
A	X																			
1	X																			
2	X																			
3	X																			
4	X																			
5	X																			
6	X																			
7	X																			
8	X																			
9	X																			
10	X																			

5																					
4																					
3																					
2																					
1																					
0	20-Oct-20	M.Asgari	M.Nazeri Nasab	M.Daneshgar	M.Asadi	N.Nouhjah														IFA	
Rev	Date	Prepared By	Checked By	Approved By	Approved By	Approved By	Discipline			Approved By	Approved By										Status
					PEM	PM															

Document Revisions



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: PACKING AND MARKING PROCEDURE

Page: 1

CONTENTS

1. Scope
2. Purpose
3. Definitions
4. Packing for Equipment and Materials
5. Packing and Marking for Electrical Panels And Instruments



1. Scope

- 1.1 This procedure gives the information for Packing and Marking and it is to be applied to vendors for the preparation, protection and packaging of materials, equipment, requiring export shipments for the PP-PE Pilot Plant Project to be built in Petrochemical Research & Technology Company, Arak/Iran.

The following instructions are intended as minimum requirements, and adherence to these instructions in no way, absolves or relieves Vendors of any responsibility or obligation outlined in the Purchase Order.

2. Purpose

This document defines the criteria required by the Project in relation to the packing and marking of both Project's Equipment and materials including Electrical Panels and Instruments.

3. Definitions

OWNER	Petrochemical Research & Technology Company
PROJECT	PP-PE Pilot Plant
GOODS	All kind of materials and equipment to be incorporated in the Project.
VENDOR	Companies Awarded by Owner for Procurement Services, Inspection Affairs or Transportation, Providing of Project's goods, following up all transport activities from VENDOR workshop to final destination as defined in the purchase order.

4. Packing For Equipment And Materials

- 4.1 Equipment and material shall be exported packed in compliance with General Purchase Conditions and the best established practice for overseas construction jobs in accordance with the following directives. In the event of any divergence between this specification and the established practice, this specification shall govern.
- 4.1.1. "Seaworthy and tropical proof " according to international standard.
- 4.1.2 Packing and conservation of goods shall be sufficient to protect them from damage during transit from point of manufacture to the delivery at job site under conditions



which may involve multiple handling, extended storage, exposure to moisture and the possibility of pilferage. The contents must withstand one year transit conditions without suffering damage and Vendors shall give recommendations for a further two(2) years storage under SITE conditions.

Required storage facilities and procedure shall be advised by manufacturer/seller in advance.

- 4.1.3 The packing of the equipment and materials shall be carried out in order to comply with transport conditions.
- 4.1.4 Individual packages shall be kept as small in bulk as possible.
- 4.1.5 Individual packages exceeding a gross weight of 3,000 kgs shall be avoided, if possible.
- 4.1.6 Kind and dimension of packages shall be chosen to suit overseas transport in containers and to fully utilize the size of containers.
- 4.1.7 The following inside dimension of containers are to be observed :
40-foot-containers : 1195x220x205 cms.
20-foot-containers : 595x220x205 cms.

4.2 Modes of Packing

In accordance with the nature of the contents, the following modes of packing shall be considered:

- a) wooden cases
- b) wooden crates
- c) skid-construction (for vessels etc.)
- d) non-returnable steel drums (export variety)
- e) non-returnable cable reels
- f) bales
- g) 20 ft - 40 ft non-refundable containers

4.3 General Rules for Packing

- 4.3.1 Cases and crates shall be made from new, sound and seasoned lumber. Sheathing shall be of min 24 mm thickness.
If so required for static reasons, thicker sheathing shall be used, in accordance with size and weight of the package. Timber crates and boxes shall be strong enough to withstand without any damage , transport on ship board at sea and numerous handling between the works and the port of origin and between the port of destination and the site.



- 4.3.2 Cases and crates with gross weight up to 1,000 kgs shall be provided with bottom cleats of min. 40 mm thickness to ensure clearance for handling by forklift. Cases and crates exceeding gross weight of 1,000 kgs shall be provided with skid runners, number and size according to weight of package.
- 4.3.3 The contents of cases shall be protected by waterproof and strong plastic foil which shall be sealed by welding. An adequate quantity of moisture absorbent (silica gel) shall be added to protect the contents for sufficiently long time from corrosion.
- 4.3.4 Felt , cellophane paper, polyester cuttings , crepe cellulose and some equally efficient materials may be used for padding or cushioning.
Wood shavings and other paper shall not be used for padding or cushioning.
- 4.3.5 Materials shall be protected against corrosion during transit as necessary. All bright and machined parts shall be coated with a recognized rust preventative suited to the particular application concerned. All internal parts of machinery shall be treated with lubricant containing rust and oxidation inhibitors to protect equipment from any damage possible. Such lubricants shall be compatible with those which will subsequently be used in service and shall be identified by appropriate tagging.
- 4.3.6 When required, materials shall be painted or coated in accordance with the particulars contained in the purchase order and/or specifications.
- 4.3.7 All flanges, machined working surfaces and threaded parts of all equipment shall be suitably protected . All flanged connections of vessels shall be protected by metal plates correctly gasketed by wooden plugs or plastic caps suitably secured in position.
- 4.3.8 Units or parts belonging to main equipment but separately packed shall be clearly marked for easy identification with the main equipment to which they relate.
- 4.3.9 Packages containing "FRAGILE" articles shall be appropriately packed and in addition to the words "FRAGILE-HANDLE WITH CARE" being stenciled on two opposite sides, internationally recognized symbols shall also be used "This Side Up".
- 4.3.10 Pipe, structural steel sections and plates shall be strapped in bundles of convenient size and weight for handling. Rolled and shaped plates shall be provided with suitable bracing to eliminate distortion during transit, and shall be bundled in uniform lengths. The weight of each bundle shall be within the breaking strain of the steel wrapping. Each bundle shall be marked with a metal tag ,hard stamped, secured under steel wrapping. A 2000 kg limitation shall be imposed for lifts in this category. Where practicable long lengths shall be limited to 12.2 meters to avoid long length carriers. All small steel sections, handrail stanchions, gusset plates etc. shall be boxed.
- 4.3.11 Black steel pipes with an outside diameter of up to 168.3 mm shall be bundled by strapping cleats above and below the load, with boards between each pipe layer and secured by bolts.



Black steel pipes exceeding the above outside diameter shall be treated as an individual package and marked accordingly.

All black steel pipes shall be protected by means of TECTYL spray. The pipe ends shall be closed with plastic caps.

If, in case of pipes with large diameters, the pipe ends cannot be closed with plastic caps, the interior of the pipes shall also be protected and sprayed with TECTYL.

4.3.12 Bitumen coated pipes shall be prepared, packed and handled according to established practice.

4.3.13 Stainless steel pipes shall be packed in wooden cases.
Protection with TECTYL is not necessary.

4.3.14 All valves and fittings (pipe elbows, flanges, etc.) shall be suitably protected and their method of shipment shall be:

- a) All valves and fittings shall be suitably packed and shipped in metal strapped or wood re-enforced waterproof wooden cases with metal corner protection .
- b) All treaded fittings shall be greased and provided with plastic caps.
- c) Control valves shall be packed in wooden cases having adequately designed interior support with interior water proof protection .

4.3.15 Apparatus and vessels shall, where possible, be packed on skid constructions and secured with adjustable steel straps. All unprotected surfaces shall be sprayed with TECTYL. Manholes and other major openings shall be protected with either plastic caps or wooden lids, which shall be firmly secured. Smaller openings shall be closed with plastic plugs.

4.3.16 All vessel internals and items not installed by the vendor at works including accessories such as small parts, bolts, nuts, gaskets etc. shall be packed in wooden cases separately for each vessel or apparatus and marked with the same item number as the vessel/apparatus in order to protect all parts from loss or damage in transit. Internals, bolts and gaskets for service/ testing operations shall be supplied with the vessels/items by the vendor and all internals, boxed separately and marked according to marking procedures. Each item shall be supplied correctly and identified for field installation by others.

NOTE: It is imperative that all these items be clearly listed on the packing list.

4.3.17 Fire bricks, special tiles and insulation refractories shall be boxed after sealing in a polyethylene liner. These boxes shall be skid mounted. Instructions regarding storage prior to installation shall be stenciled on each box with particular reference to adverse weather/temperature/humidity conditions.

4.3.18 All electrical motors whether coupled or uncoupled, generatorors and electrical equipment shall have all openings sealed with protective tape, shall be packed in suitable weather proof skid mounted boxes, and protected from moisture ingress by desiccant as described above.



Items with brushes shall be brushed and rust removed before shipment.

All electrical equipment shall be suitably protected to withstand 1 year transit conditions and Vendors shall give recommendations for a further , 2 years storage under site conditions

Batteries shall be shipped dry with electrolyte packed separately and shall include charging instructions.

4.3.19 All electronic and pneumatic instruments to be packed in accordance with given instructions and must be suitably protected to withstand 1 year transit conditions and Vendors are to give recommendations for a further 2 years storage under site conditions.

4.3.20 Pipeline / vessel insulation shall be packed in double water-proof wooden plywood cases and secured to pallets.
Drums of insulation mastic will also be shipped on pallets.

4.3.21 Spare parts for two years operation, which shall be individually tagged, must be covered with a suitable preservative and wrapped with greaseproof paper and be packed in separate cases from the base item. The cases are to bear the markings as specified and in addition the words "SPARE PARTS FOR TWO YEARS OPERATION".

4.3.22 Commissioning spares shall be individually tagged and marked "COMMISSIONING SPARES" and shall be packed and shipped with the base item.

4.3.23 All vessels/heat exchangers or items of such kind shall be dried, thoroughly cleaned inside and be free of all dirt and loose materials.

4.3.24 Should any materials be scheduled to be freighted as deck cargo, additional packing instructions may be required; the Vendor will advise, for vessels and columns, which shipment cradles will be used throughout the transportation. Cradles to be secured to vessels and columns, by strapping.

4.3.25 Paper bags suitably boxed, or water tight Steel Drums will be used for shipping cement, special aggregate, etc. Paperbags must not be less substantial than 60 lbs outer wall, 40 lbs inner wall and one moisture craft inner wall.

4.3.26 Unless otherwise specified, all export cases, boxes, bundles and containers are to be securely metal strapped with a minimum of two unannealed steel straps in each of two right angled and opposite directions, or where applicable wood re-enforced.

NOTE: Should consignments arrive at the shipment point of origin visually damaged, the shipping agent will advise and await instruction before onward shippings.

4.3.27 All bulk items, lighting, fittings, cable glands, switches etc. are to be packed in batches sufficient for a specific volume of work.



- 4.3.28 Cases and crates shall, according to their weight and size , be provided with two or more steel straps made of unannealed steel, applied with a stretching tool and secured with crimped steel seals.
- 4.3.29 Fittings (valves, pipe elbows, flanges, etc.) must be packed in wooden cases and must be protected.
- 4.3.30 Accessories for apparatus and vessels (small parts, bolts, nuts, washers, gaskets, etc.) are to be packed in wooden cases, separately for each apparatus or vessel. These cases must be marked with the same item No. as the apparatus/vessel to which it belongs (see also Item 5 - packing lists).
All commissioning spare parts to be packed separately, being the packing marked with the relevant main item.

4.4 Marking of Packages

- 4.4.1 All packages shall be clearly stencilled on two opposite sides with black, indelible and seawater proof paint, as follows:
Wherever possible , the stenciled characters shall be 8 cms high.
In case the surfaces of a package are too small to permit stenciling, sheet metal tags shall be embossed with the above marking and shall be securely fastened on two opposite ends of the package.
- 4.4.2 If necessary, packages shall be additionally marked with cautionary symbols on two opposite ends.
- 4.4.3 Packages which may be stored in the open but under a tarpaulin, shall be marked with a red "double roof" symbol.
- 4.4.4 Packages which are to be stored in closed and dry places shall be marked with a red "double roof" symbol.
- 4.4.5 The system of package-numbering shall be indicated to the OWNER in due course of time.
- 4.4.6 The gross weight shall be determined by the party who is responsible for the packing of the items/materials.
- 4.4.7 Example for marking of packages is shown in attach 1.

4.5 Packing list

The packing lists shall be prepared on standard forms :
The necessary number of forms will be made available to OWNER , who shall advise about the quantity required.
The packing list forms shall be filled in ENGLISH language.



OWNER shall supply VENDOR with a specimen packing list showing how it is to be filled in.

At the same time OWNER shall be informed of the package numbers required for marking the packages. one column of the packing list shall be filled in with OWNER "ITEM NO. " These item numbers shall be taken from the order form. Special attention shall be paid to the order form that the item number is correctly attributed to the goods to which it belongs . If any question should arise in this respect VENDOR shall contact the OWNERS Representative.

Special care shall be taken that all accessory parts loose or detachable, belonging to the main item under dispatch, shall also be individually listed in the packing list. In the event these accessory parts are not listed in the packing list , they shall be considered by OWNER as not delivered.

Two copies of the packing list in a water-proof plastic envelope shall securely be mailed under a galvanized steel sheet on the outer surface of the package The final packing list in 2-folds shall be available in OWNERS office 10 (TEN) working days prior to dispatch of the goods from the manufacturer's premises.

4.6 Liability and Guarantee

The party responsible for the packing shall be fully liable for and guarantee proper, sufficient and adequate packing, completeness of the contents, protection of the contents for a storage time of 12 month starting from the date when the equipment is loaded on the ship, and the correct preparation of the packing list.

All cost whatever resulting from inadequate or insufficient packing shall be fully charged to the responsible party.

5. Packing And Marking For Electrical Panels And Instruments

5.1 Scope

This section covers the method for packaging of electric and instrument panels for export delivery, which are to be provided with full protection against physical damage and atmospheric attack during transit and possible long periods under adverse storage conditions which may extend to two years.

5.2 General

This specification is for the package Vendor's guidance only.

Vendor shall remain fully responsible for selecting suitable materials for proper packaging and shall comply with the latest issues of the following European or British Standards: Where standards conflict with this specification, specification shall govern .

- Packing Code
- Silica gel for use as desiccant for packages
- Method of determining the permeability of materials used for packaging.



The Vendor shall provide written instructions for the removal of protective coatings and devices.

5.3 Method

5.3.1 The instrument or panel which shall be thoroughly clean, dry and free from rust shall be totally enclosed in a polythene shroud after sharp projections on the instrument or panel have been padded . Silica gel or other approved desiccant shall be strapped inside the shroud, but shall not come into contact with the paint work.

After the desiccant is strapped into position, the open ends of the shroud shall be heat sealed , only leaving an opening large enough for the insertion of an air extracting pipe. After extraction of the air from the shroud, the opening shall be completely sealed.

5.3.2 Packing Case Materials

- All wood shall be thoroughly seasoned and thoroughly sound without knots, knot holes, shakes and checks .
- Wood which can cause metallic such as oak , western red cedar and sweet chestnut shall not be used .
- The case shall be of sill base type. All sheating shall be tongued and grooved.

5.3.3 Packing Case Lining

The packing case shall be lined with completely multilayer waterproof.

The lining shall have as few joints as possible. If joints are necessary, the pieces shall be overlapped so that any rain water which may penetrate the case is shed automatically when the case is upright. Overlaps shall be 75 mm minimum Joints shall be made with Bostik 'C'.

5.3.4 Securing Instruments or Panels Inside Packing Case.

- a)The instrument or panel shall be completely secured by wooden battens faced with suitable rubber or other shock absorbing materials.
- b)Wood, wool and other hydroscopic shall not be used.
- c)Hay and straw shall not be used.

5.3.5 Sealing of Packing Case

After nailing, joints in the case shall be sealed with Bostik Sealing Compound and the outside bound with steel strapping .

5.4 Marking of Packing Cases

5.4.1 Cases which are for Carriage by sea shall be marked "*HOLD STORAGE*".

5.4.2 All cases shall be marked to indicate the correct way up and bear the marking described here in above.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: PACKING AND MARKING PROCEDURE

Page: 10

ATTACHMENT No.1

MARKING OF PACKAGES

PROJECT :

PROJECT No. :

L/C No. :

OWNER :

ORDERED BY :

ORDER No. :

FINAL DESTINATION : Pouyesh Site, Arak / Iran

STORAGE CODE :

DIMENSION : L x W x H

GROSS WEIGHT :

NET WEIGHT :

PACKAGE No. : _____ OF _____ .

MADE IN :



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: A

PAGE	REV.	0	1	2	3	4	5	PAGE	REV.	0	1	2	3	4	5	PAGE	REV.	0	1	2	3	4	5
A	X																						
1	X																						
2	X																						
3	X																						
4	X																						
5	X																						
6	X																						
7	X																						
8	X																						
9	X																						
10	X																						
11	X																						
12	X																						
13	X																						
14	X																						
15	X																						
16	X																						
17	X																						
18	X																						
19	X																						
20	X																						
21	X																						
22	X																						
23	X																						
24	X																						
25	X																						
26	X																						
27	X																						
28	X																						
29	X																						
5																							
4																							
3																							
2																							
1																							
0	20-Oct-20	M.Asgari	M.Nazeri Nasab	M.Daneshgar	M.Asadi	N.Nouhjah	IFA																
Rev	Date	Prepared By	Checked By	Approved By	Approved By	Approved By	Status																
		Discipline			PEM	PM																	

Document Revisions



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 1

These instructions outline the requirements for providing original manufacturer's pre-commissioning, commissioning and two years operation spare parts for a PP-PE Pilot Plant to be built in Petrochemical Research & Technology Company, Arak/Iran.

CONTENTS

- 1) General information
- 2) Definitions
- 3) Spare parts required
- 4) Required information
- 5) Identification
- 6) Packing and protection
- 7) Special storage items

Attachments:

1. Erection, precommissioning, commissioning and start-up phase spare parts
2. Two years operation spare parts
3. Guidelines for the compilation of Spare Parts Interchangeability Record (SPIR)
4. SPIR form



1) General Information

These instruction outline the requirements for providing original manufacture's pre-commissioning, commissioning and two years operation spare parts for PP-PE Pilot Plant to be built in Petrochemical Research & Technology Company, Arak/Iran.

The Vendor is obliged to provide with an original equipment manufacturer spare parts data package, containing full and complete spare parts information and prices for each item of equipment supplied.

The Vendor shall recommend those spare parts that are deemed necessary on the basis of Vendor's recommendations and experience.

2) Definitions

- 2.1 "Erection, Precommissioning, Commissioning and start-up spare parts" are those material, equipment or components necessary during the erection, precommissioning, commissioning and start-up activities of the Plant.
- 2.2 "Operating Spare Parts" are spare parts material, equipment or components necessary for the continuous operation of the plant after commissioning completion for a period of two years.
- 2.3 GOODS: All kind of materials and equipment to be incorporated in the Project.
- 2.4 VENDOR: Companies Awarded by Owner for Procurement Services, Inspection Affairs or Transportation, Providing of Project's goods, following up all transport activities from VENDOR workshop to final destination as defined in the purchase order.
- 2.5 OWNER: Petrochemical Research & Technology Company.

3) Spare Parts Required

3.1 Capital spare parts

Capital spare parts are defined in documentation prepared by technical department.

3.2 Erection, precommissioning, commissioning and start-up Spare Parts

Vendor is requested to submit a Spare Parts proposal together with base quotation. Such spare parts shall be packed in separate boxes and shipped together with the main equipment/material purchased in order to be available at the site together with the base order supply.

Minimum required quantities are shown in attachment 1.



3.3 Two years operation spare parts

Vendor is requested to submit a Operation Spare Parts quotation based on his experience together with base quotation

The necessary and sufficient two years spare parts include those parts that are normally required to maintain the plant in a satisfactory working condition for a period of two years of continuous operation after plant start-up.

These Operation Spare Parts shall be packed in separate boxes.

Guidelines for selection of two years spare parts are shown in attachment 2.

4) Required Information

4.1 All information and drawings must be in English language.

4.2 Data sheets, engineering drawings, manufacturer's catalogs and operating and maintenance manuals required to identify the function of and fully describe all parts associated with the equipment

4.3 The interchangeability of spare parts must be completely assured between all units contained on the parent equipment purchase order.

4.4 The Vendor shall guarantee the spare parts in accordance with the requirements requested for the parent equipment.

4.5 The offer must be valid for supply either for total or partial quantities.

4.6 All Spare Parts list shall be filled-in using the attached "Spare Parts Card" according also to the instructions attached herein.

Photocopied or hand-written documents are not acceptable.

Twelve (12) months price validity is required

5) Identification

All spare parts shall be individually identified by one of the following methods:

5.1 A stainless steel label imprinted with lettering approximately 6 mm (1/4) high and secured to the part with S.S. wire.

5.2 Inscribing with an electric spark erosion pencil

5.3 On large items inscribing with non-fading, moisture resistant marking ink, figures/ letters to be at least 25 mm (1) high. Ink shall be Pannier 1001 Yellow Industrial or equal.



- 5.4 Items such as Ball Bearings which in actual storage will remain in their packing may be identified with an adhesive label firmly attached to the outside of the carton.
- 5.5 Alternative methods which are standard industrial practice may be used provided SP's approval has been obtained in writing in advance. Stamping directly into spare parts will not be allowed.
- 5.6 The following shall appear on each spare or spare part label:
Manufacturer's real part number.
Short description (one word will suffice if space is limited).
Tag number of equipment (if applicale).

6) Packing And Protection

- 6.1 Packing protection and marking of the packing container shall be as described in Project Packing and Marking Procedure 000-PCR-PRC-0002. Spare parts shall be packed separately from main equipment and the packing containers shall clearly be marked "erection, pre-commissioning, commissioning, and start-up spare parts" or "two years operating spare parts" as applicale. The following additional comments apply :
- 6.2 Packing cases and other shipping containers must be capable of giving adequate protection to contents for a period of one year after despatch from Vendor work-shop (i.e. cases may after receipt at the Plant Site be stored outside before being unpacked).
- 6.3 Two years operating spares are to be protected and packed in such a manner as to ensure a minimum shelf life of four years in an un-air-conditioned warehouse sited in extremely dusty heavy industrial and coastal area with salt pollution location where the maximum shade temperature may exceed -14 +45 C. and where relative humidity reaches 90%.
- 6.4 Consumables items such as bolts and nuts shall be adequately oiled to prevent corrosion.
- 6.5 Other unpackaged items shall be protected by a rust preservative oil, hard drying type. if the nature of the item permits the removal of the deposited tar oil skin by means of petroleum based solvents or the use of hot dip strippable coating.
- 6.6 Any protection for stainless steel parts shall not contain chlorides or harmful metal salts such as Zinc, Lead, Copper. etc. Also marking paint or ink shall not contain similar harmful components.
- 6.7 Electronic and instrument parts shall be packed in sealed clear plastic bags along with a bagged amount of dessicant.

7) Special Storage Items



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 5

- 7.1 Vendor must advise of any spares which cannot be stored under the conditions stated in para. 6.2 and which require special storage conditions
- 7.2 Special Storage Items are to be clearly labelled with storage instructions such as:
STORE IN A COOL DRY PLACE AT C
STORE IN DARK PLACE
KEEP HUMIDITY BELOW %
etc.
- 7.3 Owner must be notified of all such items without delay before order placement since a restricted shelf life may require an amendment to order quantity and an appropriate re-ordering procedure.



ATTACHMENT 1

ERECTION, PRECOMMISSIONING, COMMISSIONING AND START UP SPARE PARTS

1) FURNACES

<u>Gaskets for coil:</u>	50%
-Burner Tiles	100%
-Burner Tips	5%
-Fire eyes	10%
-Gas valves seat	100%
-Solenoid valves	25%

2) EXCHANGERS, REACTORS & DRUMS/TANKS

Gaskets for Girth Flange, M/H& H/H	100%
Stud Bolts and Nuts for the Above	5%(Min. 2 Sets)
<u>Field-Installed Trays:</u>	
-Bolts and Nuts	15% (Min. 2 Sets)
-Washers (Metal and Asb.)	20% (Min. 2 Sets)
-Tray Clamps	10% (Min. 2 Sets)
-Asb. Rope and Tape	25% (Min. 2 Sets)
<u>Field-Installed Internals, Piping and Other Bolted Internals:</u>	
Stud Bolts (Alloy and C.S.)	10% (Min. 2 Sets)
Washers and Nuts	10% (Min. 2 Sets)
<u>Packing:</u>	
-Inert Balls	15%
-Raschig Rings / Slotted Rings	15%
-Gaskets Sets And O-Rings	100%
-Fan for Air Cooler	

3) STEEL STRUCTURE AND PLATFORM

Bridge Crane:

-Bolts & Washers	15%
------------------	-----



-Gashels	10%
-Contactors	5%
-Tension Springs	10%
-Fuse Elements	10%
-Gaskets	10%
-Oil Seals	25%
-Relays	5%
-Collectors	1 set Each Size
-Contact Shoes	1 set Each Size
-Limit Switches	1 set Each Size
-Welding Rod	10%

4) MACHINERY / PACKAGES

Please see the relevant engineering specifications of each equipment for commissioning spares.

Electrical Equipment: See item 9

Instrumentation:

- Control panel	See item 10
- Board instruments	See item 10
- Field Transmitters	See item 10
- Field instruments	See item 10
- Others	0%

5) H.V.A.C.

Bolts, Nuts, Gaslets for Field installation of Pipe/Duct	5%
Rotating Equipment	See item 5
Heat Exchangers	0%
Filter Element	1 Set Each Size/Material
Electrical	See Item 9
<u>Instrumentation:</u>	
-Control panel	See Item 10
-Board Instruments	See Item 10
-Field Transmitters	See Item 10



-Field Instruments See Item 10
-Others 5%

6) SPECIAL EQUIPMENT

Heat Exchanger See Item 2
Rotating Equipment See Item 5
Filter Element 1 Set Each Size/Mat'l
Piping 0%
Electrical See Item 9

Instrumentation:

-Control panel See Item 10
-Board Instruments See Item 10
-Field Transmitters See Item 10
-Field Instruments See Item 10
-Others 0%

7) PIPING

Gaskets, all sizes 20%
Stud Bolts less than 1" 15%
Stud Bolts 1" to 1 7/8" 10%
Stud Bolts 2" and over 5%
Welding Rods 10%
Coating and Wrapping 10%

	Carbon Steel	Alloy/SS	Cast Iron
Pipe 2" and below	15%	4%	0%
3" to 6"	10%	2%	5%
8" and over	5%	1%	5%
(*) Valves 2" and below			
screwed and welded	10%	5%	0%
(*) flanged	2%	2%	0%



(*) Valves 3" to 10"	2%	2%	0%
(*) Valves over 10"	0%	0%	0%
(*) Flanges up to 12"	5%	3%	0%
(*) 14" and over	2%	2%	0%
(*) Fittings welded up to 2"	10%	6%	0%
(*) 2 1/2" to 10"	5%	3%	0%
(*) 12" and over	3%	2%	0%
(*) Fittings Screwed up to 2"			
(*) 3" and over	5%	3%	0%
(*) Flanged all sizes	5%	3%	0%
(*) Hub and Spigot 3" to 12"	0%	0%	5%
(*) 4" and over	0%	0%	3%

Note: as indicated with (*), where the percent gives the quantity consisting of a whole number plus a decimal less than 0.5, the decimal portion will be dropped; where the decimal portion is 0.5 and more, the next higher whole number quantity will be selected.

8) ELECTRICAL EQUIPMENT

Switchgear, Motor Control Centers MV/LV:

-Fuse elements	50%
-Bulb for Signal Lamps	50%

Local Control Panels & control stations:

-Fuse elements	50%
-Bulb for Signal Lamps	50%

Electirc Motors:

-Grease Nipples where applicable	10%+power terminal (in J.B.) 2%
Lighting Fixtures	3%
Flag Relay	2%
Time Relay	2%
Terminal Block	2%
Auxiliary Relays	1%
Moving Contacts	15%



Fixed Contacts	15%
Coils for Contactors	10%
Boucholz Relay	one of each type and size
Thermometer	
<u>Local Control Station:</u>	5%
-Ammeter	
-Push button	5%
-Selector Switch	5%
<u>UPS:</u>	
-Fuse	*
-MCB (miniature circuit breaker)	*
-SCR	*
-DIOD	*
-Transistor	*
-Control cards	*
-Signaling lamps	*
-Batteries	*
<u>Battery Charger:</u>	
-Fuse	*
-MCB(miniature circuit breaker)	*
-SCR	*
-DIOD	*
-Transistor	*
-Control cards	*
-Signaling lamps	*
-Batteries	*
Fire Alarm System	*
Telephone System	*
Paging System	*
Radio System	*
Emergency Diesel Generator	*
Sockets (400V, 230V, 24V)	5%



Plugs(400V, 230V,24V)	5%
Portable 110V AC, 50Hz, with transformer	5% each type
Socket and plug (ex-type)	
Hand lamp 24V AC, 50Hz(ex-type)	10 no.

All special tools, equipment and spare parts required for commissioning and start-up shall be provided.

These are the spare parts that VENDORS shall recommend based on experience.

9) INSTRUMENTATION

For control Panel:

- Bulbs For Signal Lamps	50%
- Fuse Elements	50%

Boards instruments:

- Fuse elements	50%
- Chart paper for recorders	3 boxes each type
- Ink for Recorder	7 sets each type
- Pens for Recorders	50%

Field transmitters:

- Gasket	15%
----------	-----

Field instruments:

- Air pressure regulators	5%
- Temperature Indicators	10% each range
- Pressure gauges	10% each range
Solenoid Valves	2% each type(min 1 set)
Selonoid coils	3 coil each type
Valve positioners	2% each type(min 1 set)
Cable – Single Pair	20%
Cable – Multi Pair	15%
Cable Glands	20%
Junction Boxes – Large	1 min.
Pipe and Tube	10%



Fittings all type 15% each size

Valves 20%

Manifold Valves 10% each size

Cable Tray 20%

DCS:

- Bulbs for signal lamps 50%

- Fuse elements 50%

- Printer paper, Chart paper 4 boxes each type

- Printer Ribbon 10 sets each type

- Blank Floppy disks/magnetic tape cartridge 10 pieces

Gas Chromatograph:

-Filter elements 10%

-Calibration gas cylinders 1 cylinder (100 liter) each type

-Standard gas cylinders 1 cylinder (100 liter) each type

-Other gas cylinders 1 cylinder (100 liter) each type

Other Analyzers:

-Filter Elements 10%

-Calibration Gas Cylinders 1 cylinder (100 liter) each type

-Standard gas cylinders 1 cylinder (100 liter) each type

-Other gas cylinders 1 cylinder (100 liter) each type

10) PAINT AND INSULATION

Paint 10%

Insulation material 10%

Insulation Band & Seal 10%

Insulating Cement 10%

Insulation Sheet Metal 15%

Insulation Wire 10%

11) UTILITY EQUIPMENT

Heat Exchanger, Vessel, Tank and Tower See item 2



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 13

Rotating Equipment	See item 5
Filter Elements	1 Set Each Size/Mat'l
Piping	0%
Electrical	See item 9
<u>Instrumentation :</u>	
-Control panel	See item 10
-Board Instruments	See item 10
-Field Instruments	See item 10
-Others	0%



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 14

ATTACHMENT 2

GUIDELINES FOR SELECTION OF 2 YEARS OPERATION SPARE PARTS

Spare parts for equipment are shown in the following tables:

Table 1 – Spare parts for machinery/packages.

Table 2 – Spare parts for electrical equipment

Table 3 – Spare parts for instruments

Table 4 – Spare parts for pressure vessels and heat exchangers

Table 5 – Spare parts for piping.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 15

TABLE 1

SPARE PARTS FOR MACHINERY / PACKAGES

Note 1: Please see the relevant engineering specifications of each equipment for recommended 2-years spares.

Note 2: Please see tables 2 and 3 of attachment-2 for the electrical and instrument spare parts requirements of machinery / packages for 2 -years.



TABLE 2
MINIMUM SPARE PART FOR ELECTRICAL EQUIPMENT

Item:	Quantities
1) Switchgears:	
MV Fuses	15%
Protecting and Flag Relay	2%
Time Relay	2%
Lamps	10%
Space Heaters	10%
L.V. Fuses	2%
Auxiliary Relays	1%
Moving Contacts	15%
Fixed Contacts	15%
Circuit Breakers(MCCB,MCB)	10%
Contactors	15%
Metering	15%
CT	20%
PT	20%
2)Power Motors Control Center: L.V. Fuses	15%
Time Delayed Relays	8%
Lamps	10%
Space Heaters	10%
Terminal Blocks	7%
Auxiliary relays	To be determined later in conjunction with the equipment vendor
Contactors	
Thermal	
overload Relays	
Isolators for each trip	
Current Setting	11%



	Motor Circuit Brakers					
	Complete Unit for Each					15%(min 1)
	Type & Size(incoming & bus tie)					
	Moving Contacts	20%				
	Fixed Contacts	20%				
	Metering	15%				
	CT	20%				
	PT	20%				
	Circuit Breaker	one per each type				
3) Transformers :	Bucholz Relays	one each type & size				
	Thermometer	10%				
	Bushing HV/LV	50%				
	Measuring and cintrol devices	20%				
	CT of natural resistor	10% (of each type)				
4) Power Material:	a) Local Control Stations	5%				
	b) Sockets 400V AC	10%				
	c) Plugs 400V AC	10%				
5) Lighting Materials:	a) Switches	10%				
	b) Fuses	30%				
	c) Sockets(230 V, 24V)	10%				
	d) Plugs(230 V, 24V)	10%				
	e) Lighting Fixtures	10%				
	f) Ballast Lamps	5%				
	g) Lamps	20%				
	h) Portable 110V AC,50Hz with transformer (ex-type)socket and plug	10%				
	i) hand amp 24V AC, 50Hz (ex-type)					
6) Motors:						
No of Machines	1	2	3	4	5	more
set of Bearing	1	1	1	2	2	40%
Fan, terminal, blocks, space heater (MV)per type						5%



7) UPS:

Fuses	30%
MCB(miniator circuit breaker)	15%
SCR	30%
Signaling lamps and protection device	15%
DIOD	10%
Transistor	30%
Control cards	one per each type
Batteries	5%
Isolator switch (make before break)	one per each type

8)Battery charger:

Fuse	30%
MCB	15%
SCR	30%
DIOD	10%
Signaling lamp	15%
Control cards	one per each type
Batteries	5%

9)Telephoned system

*

10) Paging system

*

11) Radio system

*

12) Fire alarm system

*

13) Neutral grounding system

*

14) Bus duct

*

These are the spare parts required for two years operation. Vendor shall recommend the spares based on their experience.

(*The Quantities indicated are only preliminary estimation, so the firm quantities will be specified later in conjunction with recommendations of equipment vendors.

The quantities which shall be ordered by VENDOR shall be approved By OWNER.



TABLE 3
SPARE PARTS FOR INSTRUMENTS

<u>Item</u>	<u>Quantities</u>
Flow Instruments	To be determined
Level Instruments	in conjunction with the equipment Vendor
Temperature Instruments	(based on Vendor's experience on similar type of plant)
Pressure Instruments	
Analyzers	
Control Valves : Valve Bodies	None unless service is corrosive or erosive. For corrosive or erosive services, shall be determined in conjunction with the equipment Vendor.
Valve Plugs	1 of each size/min. 15% or 1
Seat Rings	1 of each size/min. 25% or 1
Actuators	10% (min 1 per type / size)
Valve Stems	1 of each diameter. These vary in length depending on valve size. Purchase the longest of each dia. These can be cut to the correct size.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 20

Stem packings	3 boxes of each size used/min. 20%
Grease	3 boxes of each type used/min. 20%
Diaphragms	1 of each size used min. 20%
Blank Orifice Plates	
Dial Thermometers	
Manual Loading Stations	
Instrument Air Filters (Regulation sets)	
Pressure Gauges	
Pressure Switches	
Plug-in Assemblies for Elect. Instr.	
Plug-in Assemblies for Pneum. Instr.	10%
Seal, Condensate and Vent Pots	(for all)
Solenoid Valves	
Thermocouples	
Thermowells	
Signal Lights	
Pneumatic relay and/or boosh(if any)	
Valve Positioners	10%
I/P Convertes	(for all)



DCS/ESD/PLC (for each system the following items):

- I/O cards 5% for each type (min 1 for each type)
- Main cards one set
- Power supply (AC, if any) one set
- Power supply (DC, if any) one set
- Barriers cards 5% for each type (min 1 for each type)

On-line gaschromatographs:

- Main mother board one set
- Column one per type

TABLE 4
SPARE PARTS FOR
PRESSURE VESSELS & HEAT EXCHANGERS

<u>ITEM</u>	<u>QUANTITIES</u>
1) Heat Exchangers-Shell and Tube (U Type included)	
- Tubes	Straight tubes sufficient to retube the largest bundle of each tube size and material.
- Bolts and nuts	(Special or Alloy) of each exchanger minimum one set.
- Gaskets	200%
2) Pressure Vessels	
- Gaskets	200%
- Bolts and nuts	10% (Special, Alloy or size 2" diam or greater), minimum one set.
3) Air Cooled Exchangers	
- Plugs	Steel 1%; Non-ferrous 2% (min. one number)
- Plug Gaskets	5% (min. one number)
-Cover plate gaskets	10%
-Tube support boxes	10% (min. one number)
4) Number of Air-fin Coolers Using Part.	1 2 3 4 5 6 7 or more
(i) V-Belts-Sheaves (Driven & Driver)	0 0 0 0 0 0 1
- Set of Belts	1 2 3 4 5 6 100%
(ii) Fan Shaft Bearing (Upper & Lower)	1 1 1 2 2 3 50% of No of Air Fins
(iii) Speed Reducers (Gear Box) Shaft	



and pinion

- Bearing Set 1 1 1 2 2 3 50% of No
of Air Fins

- O-Rings, Seals, Lock-washers, Locknuts

(iv) Couplings – Complete Coupling,

-Flanges, Gaskets, Seals 1 1 1 1 1 1 1

(v) Fan Assemblies 1 2 3 4 5 6 100% of No
of Air Fins

-Automatic Pitch Control

-Hub Assembly Parts Guide Bushing,

-Pitch Blocks, O-Rings, Clam Gaskets

(vi) Bolt Assemblies, Fork, Pins 1 2 3 4 5 6 100% of No
of Air Fins

(vii) Flexible Hose, Rotary Union 1 1 1 1 1 1 2

(viii) Automatic or Manual Adjustments:

- Blade Retention Clamps, Pitch, 1 1 1 2 2 2 30% of No
of Air Fins

Change Forks, Push Rod, Stub,(with pilot tubes),Bearing

Retainer Rings

(ix) Spring Housing Gasket, Diaphragm, 1 1 1 1 2 2 20% of No
Blade Retainer Ring, Thrust of Air Fins
cover Gasket

(x) Hub Assembly with Blades 0 0 0 0 0 0 1 (b)

(*) NOTES

(a) Quantities shown are for each size and type of part

(b) Twenty units or more

(c) The parts listed are the principal parts only. Other parts shall be considered for recommendation in quantities consistent with the above table.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 24

5) Plate type Exchangers

Plat gasket	100%
Flow Plate	10%
Nozzle Gasket	200%
Glue (1 Kg. Pot)	1
Special spanner tool	1 for each size/type



TABLE 5
SPARE PARTS FOR PIPING

<u>Item</u>	<u>Quantities</u>
Valves up to 1 ½"	5% for each size, type and material complete units
Valves from 2" to 6"	2% (minimum 2 pieces) for each size , type and material
Valves above 6" to 10"	1 piece for each size, type and material complete units
Valves above 10"	1 only if installed valves quantity is more than 30
Valves up to 10"	
Gland packing and bonnet gasket	10%
Valves from 2" to 10"	2 for each type , size and material set of changeable inner parts
Valves above 10"	1 for each type, size and material
Set interchangeable inner parts: bonnet gasket and stem packing	
Piping gaskets and bolts set for each size and type	10%



ATTACHMENT 3

GUIDELINES FOR THE COMPILATION OF SPARE PARTS

INTERCHANGEABILITY RECORD (SPIR)

The manufacturer/supplier shall complete the following parts of th SPIR form as per listed sequence and in the English language:

- Line 1: PLANT registration/item number or tag number of equipment/instruments, etc. as stated on requisitions and/or Purchase Orders.
- Line 2: Mode, type or other identification of equipment/instruments, etc. ordered.
- Line 3: Serial number of each equipment/instruments, etc. ordered.
- Line 6: Purchase Order number reference of equipment/instruments, etc.
- Line 6a: Unit of measure, i.e. No., set, pair, kg,roll, etc.
- Line 4: Number of identical equipment, etc. of particular model or type being supplied against Purchase Order number mentioned under line 6.
- Line 8: Parts description of all component parts considered by supplier as being required for maintenance of equipment, etc. listed in lines 1, 2 and 3. However, all items specified in the appropriate equipment list shall be shown separately.
- Col. 9: Drawing number/part number as per supplier's parts list or drawing.
- Col. 10: Part identification number shoeing interchangeability within equipment manufacturer's organization.
- Note: Identical parts, regardless of whether they have the same part number or drawing number, should be shown only once (see also line 5).
- Col.11: Material specification of parts listed in column 8.
- Line 5: Enter in appropriate sqare the nuber of parts (listed in column) fitted in each applicable unit. For groups of identical units, denote quantity per unit below quantity shown in line 4.
- Col. 7: Total number of identical parts listed in colimn 8 for all equipment, etc. For identical units multiply quantity in line 5 by number in same column in line 4 and enter overall total of each line in column 7.



- Col.12: Total spare parts recommended for 2 years operation and commissioning period.
- Col.18: Unit price (up to two decimals) for recommended spare parts of column 12.
- Col.20: Original identification number for all items of third party manufacture (bought-out items) such as : ball/-roller bearings, mechanical seals, couplings, bearing lock nuts, bearing lock washers, V-belts, bolts/nuts, gaskets, O-rings, and the like. These items should be fully identified by manufacturers' numbers, types, sizes, etc.
- V – for: Vital equipment, a breakdown of which would mean an immediate and serious interruption of vital operations in field or plant and with which no risk in the ordering and stocking of spare parts can be justified.
- E – for: Essential equipment, engaged in primary operations, but with which a calculated risk can be taken in ordering and stocking of spare parts.
- A – for: Auxiliary, general purpose and stand-by equipment, for secondary operations, the temporary lack of spare parts would not have a serious effect.
- Under this heading also comes the equipment of which there is a large number of units in used, thus ensuring a sufficient degree of protection in case of failure of one or more units.

The Owner MESC project team should complete the following part of the SPIR form

- Col.16: For allocation of the final MESC number.
- Col.17: For the classification of spare parts, i.e.:
- C – for: Parts wearing out or deteriorating during normal operations, thus shown a fairly regular consumption.
- Q - for: Parts not normal stocked, but ordered on request only.
- I - for: Insurance items.
- O - for: Temporary code number.

THE VENDOR SHALL COMPLETE THE FOLLOWING PART OF THE SPIR FORM:

- Col.13: VENDOR'S recommended spare parts for 2 years operation.



National Petrochemical Company
Petrochemical Research & Technology Co.

PP-PE Pilot Plant



شرکت ملی صنایع پتروشیمی
شرکت پژوهش و فناوری پتروشیمی

Title: SPARE PARTS PROCEDURE

Page: 28

- Col.14: VENDOR'S recommended spare parts for the precommissioning, commissioning and start-up period.
- Col.22: This column has to be filled out for the respective parts purchase order-item reference. This number should be tagged to the respective material for easy identification upon receipt at site.
- Col.19: Total price (up to 2 decimals) of the spare parts for 2 years operation and the commissioning period based upon the quantities approved by the OWNER'S Project Engineer (see column 15)

NOTE: Columns 15, 17 and 21 should be left blank, these are for OWNER'S use.

THE OWNER'S PROJECT ENGINEER SHOULD COMPLETE THE FOLLOWING PART OF SPIR FORM:

- Col.15: Final quantity to be ordered and Approved by the OWNER's Project Engineer.
- Col.21: This column has to be used to indicate the equipment class, i.e.

IMPORTANT NOTE:

The necessary provisions shall be made to fix the prices of spare parts for all equipment and materials for future purchasing of the spare parts by OWNER more than which shall be purchased by VENDOR for two years operations of the PLANT all EQUIPMENT AND MATERIALS for future purchasing of the spare

ATTACHMENT 4

SPIR Form:



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	
EQUIPMENT REQ. OR TAG NO.	MANUFACTURER'S MODEL OR TYPE	MANUFACTURER'S SERIAL NO.	NO. OF UNITS	NO. OF PARTS PER UNIT	MISC NO. OF EQPT OR ORDER REF. NO.	TOTAL NO. OF IDENTICAL PARTS INSTALLED		DESCRIPTION OF PARTS	MATERIAL SPECIFICATION	DRAWING NO. INCLUDING POSITION OR ITEM NUMBER	MAKE OF THE SUPPLIER OR BRAND/XXX	PART NUMBER REFER TO SHEET 3	SUPPLIER OF EQUIPMENT BOUGHT OUT ITEMS	MISC NUMBER	XXX OF MEASURE	CURRENCY UNIT	REQUIRED ON SITE DATE	DELIVERY TIME BY WEEKS	COMMISSIONING ACTUAL (1 YEAR)	COMMISSIONING NORMAL (2 YEAR)	COMMISSIONING CRITICAL	COMMISSIONING ACTUAL (1 YEAR)	COMMISSIONING NORMAL (2 YEAR)	COMMISSIONING CRITICAL	PHYSICAL STOCK	QUANTITY TO BE ORDERED
P-YYA/B	XXX	XXXXXXXX	2	1		1	1	Ball Bearing	AC26 E200	386-N018-5400-01 No.28	NSK	#728E0F		PC	PC											
P-XXXA/B/C	XXX	XXXXXXXX	2	2		2	2	O-Ring	NER	386-N018-5400-01 No.14				PC	PC											

SPARE PARTS LIST AND INTERCHANGEABILITY RECORD

Project: A Project

Plant/Location: PMA & Cooling B

Manufacturer: XXXXXXXXXXXXXXX

Vendor: XXXXXXXXXXXXXXX

Equipment: Centrifugal Pumps for 700K

NOTE: In case of sub-vendor item, name of sub-vendor to be shown in the column of Manufacturer.

PLEASE REFER EXPLANATION OF THE COLUMNS ON SHEET 2 BEFORE FILLING UP THE FORM.

Seller's name to be shown.

Unit of Qty of parts to be shown.

SPARE NUMBER: _____

Unless otherwise instructed, the column can leave it blank.

GROUP: _____

AUTHORIZED FOR PURCHASE BY: _____

Currency unit to be shown: *

REQUIRED ON SITE DATE: _____

Validity date to be shown: *

SPARE PARTS RECOMMENDED BY MANUFACTURER

SPARE PARTS RECOMMENDED BY LICENSOR

PHYSICAL STOCK

QUANTITY TO BE ORDERED

MANUFACTURER/SUPPLIER'S SPARE PARTS DATA

DESCRIPTION OF PARTS: Ball No. Model, Serial No. to be shown for each item.

In case there is interchangeability for each part among several items, the Qty of parts per unit to be shown in the same line of part.

This sample shows there is interchangeability among 5 pumps and Qty of parts used in 5 pumps is shown in the column 7.

Qty of parts for 1 unit of P-YYA/B, Qty of parts for 1 unit of P-XXXA/B/C to be shown.

Drawing No. and Parts No. in the drawing to be shown for identification of each part.

Supplier or brand for each part to be shown. If not applicable, put "X".

Parts No. controlled by vendor or sub-vendor to be shown. If not applicable, put "X".

Parts No. controlled by supplier or brand specified in the column 12 to be shown. If not applicable, put "X".

Parts No. controlled by supplier or brand specified in the column 12 to be shown. If not applicable, put "X".

Delivery time (Business) to be shown: *

Unit price including sea-monthly report packing to be shown: *

Quantity of spare parts recommended by vendor to be shown.

Vendor's Order No. to be shown.

Reference drawing is not required to be attached.

All drawings and parts list attached.

To be filled by Vendor.

Spare Parts

Description	Qty.
Shaft (with key)	1 pc
Impeller	1 pc
Shaft Sleeve	2 pcs
Gasket & O-Ring	2 sets
Mechanical Seal	2 pcs
Bearing	2 sets
Wear Ring	2 sets